

# StarWind Virtual SAN: Configuration Guide for Microsoft Windows Server [Hyper-V], VSAN Deployed as a Controller VM (CVM) using GUI

2024

TECHNICAL PAPERS



## Trademarks

“StarWind”, “StarWind Software” and the StarWind and the StarWind Software logos are registered trademarks of StarWind Software. “StarWind LSFS” is a trademark of StarWind Software which may be registered in some jurisdictions. All other trademarks are owned by their respective owners.

## Changes

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, StarWind Software assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. StarWind Software reserves the right to make changes in the product design without reservation and without notification to its users.

## Technical Support and Services

If you have questions about installing or using this software, check this and other documents first - you will find answers to most of your questions on the [Technical Papers](#) webpage or in [StarWind Forum](#). If you need further assistance, please [contact us](#).

## About StarWind

StarWind is a pioneer in virtualization and a company that participated in the development of this technology from its earliest days. Now the company is among the leading vendors of software and hardware hyper-converged solutions. The company's core product is the years-proven StarWind Virtual SAN, which allows SMB and ROBO to benefit from cost-efficient hyperconverged IT infrastructure. Having earned a reputation of reliability, StarWind created a hardware product line and is actively tapping into hyperconverged and storage appliances market. In 2016, Gartner named StarWind “Cool Vendor for Compute Platforms” following the success and popularity of StarWind HyperConverged Appliance. StarWind partners with world-known companies: Microsoft, VMware, Veeam, Intel, Dell, Mellanox, Citrix, Western Digital, etc.

## Copyright ©2009-2018 StarWind Software Inc.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of StarWind Software.

## Annotation

### Relevant products

This guide applies to StarWind Virtual SAN and StarWind Virtual SAN Free (OVF Version 20230901 Version V8 (build 15260) or earlier.)

For newer versions of StarWind Virtual SAN (CVM Version 20231016 and later), please refer to this configuration guide:

[StarWind Virtual SAN: Configuration Guide for Microsoft Windows Server \[Hyper-V\], VSAN Deployed as a Controller Virtual Machine \(CVM\) using Web UI – Resource Library](#)

### Purpose

This document outlines how to configure a Microsoft Hyper-V Failover Cluster using StarWind Virtual SAN (VSAN), with VSAN running as a Controller Virtual Machine (CVM). The guide includes steps to prepare Hyper-V hosts for clustering, configure physical and virtual networking, and set up the Virtual SAN Controller Virtual Machine.

For more information about StarWind VSAN architecture and available installation options, please refer to the [StarWind Virtual \(VSAN\) Getting Started Guide](#).

### Audience

This technical guide is intended for storage and virtualization architects, system administrators, and partners designing virtualized environments using StarWind Virtual SAN (VSAN).

### Expected result

The end result of following this guide will be a fully configured high-availability Windows Failover Cluster that includes virtual machine shared storage provided by StarWind VSAN.

*NOTICE: This guide universally applies to both 2-node and 3-node clusters. Please follow the quick notes within the configuration steps to carry out the necessary actions required for each cluster size.*

## Prerequisites

## Starwind Virtual San System Requirements

Prior to installing StarWind Virtual SAN, please make sure that the system meets the requirements, which are available via the following link:

<https://www.starwindsoftware.com/system-requirements>

Recommended RAID settings for HDD and SSD disks:


<https://knowledgebase.starwindsoftware.com/guidance/recommended-raid-settings-for-hdd-and-ssd-disks/>

Please read StarWind Virtual SAN Best Practices document for additional information:


<https://www.starwindsoftware.com/resource-library/starwind-virtual-san-best-practices>

## Solution Diagram

The diagrams below illustrate the network and storage configuration of the solution:

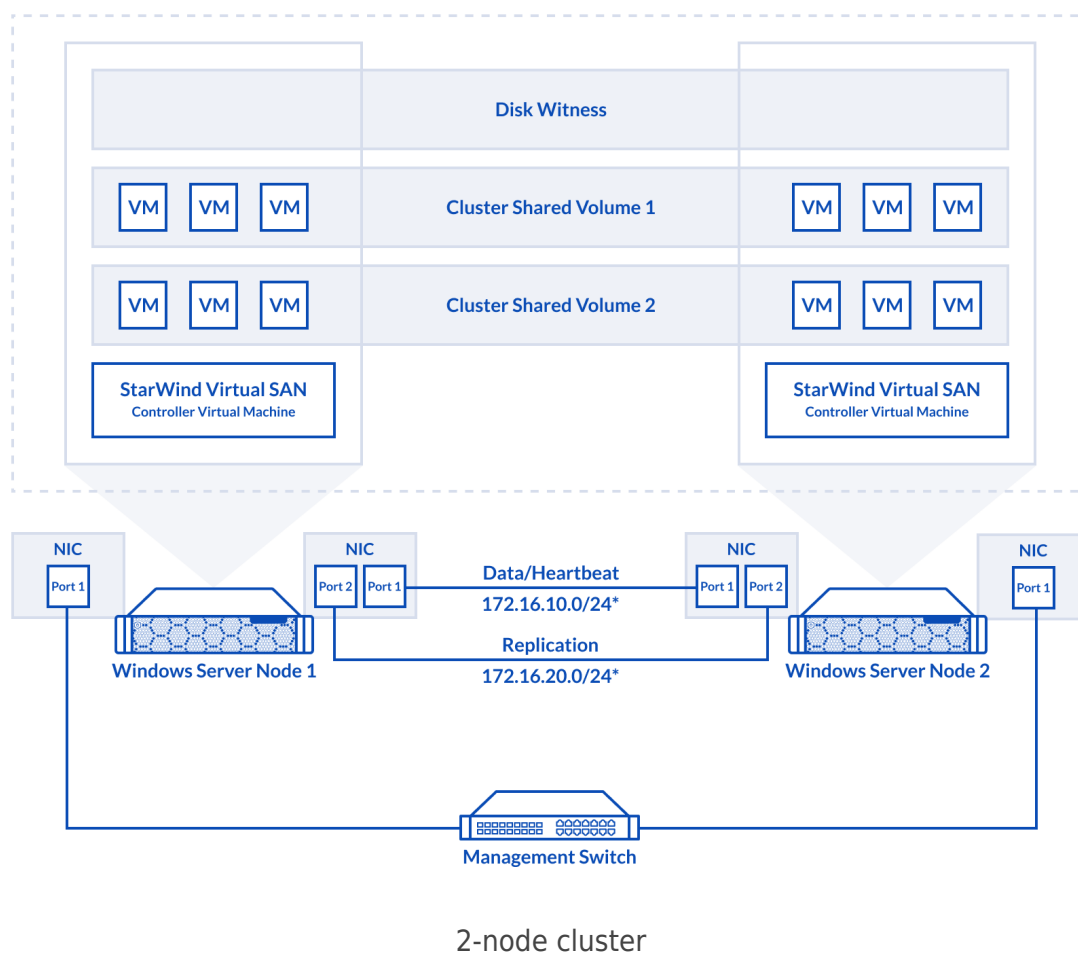



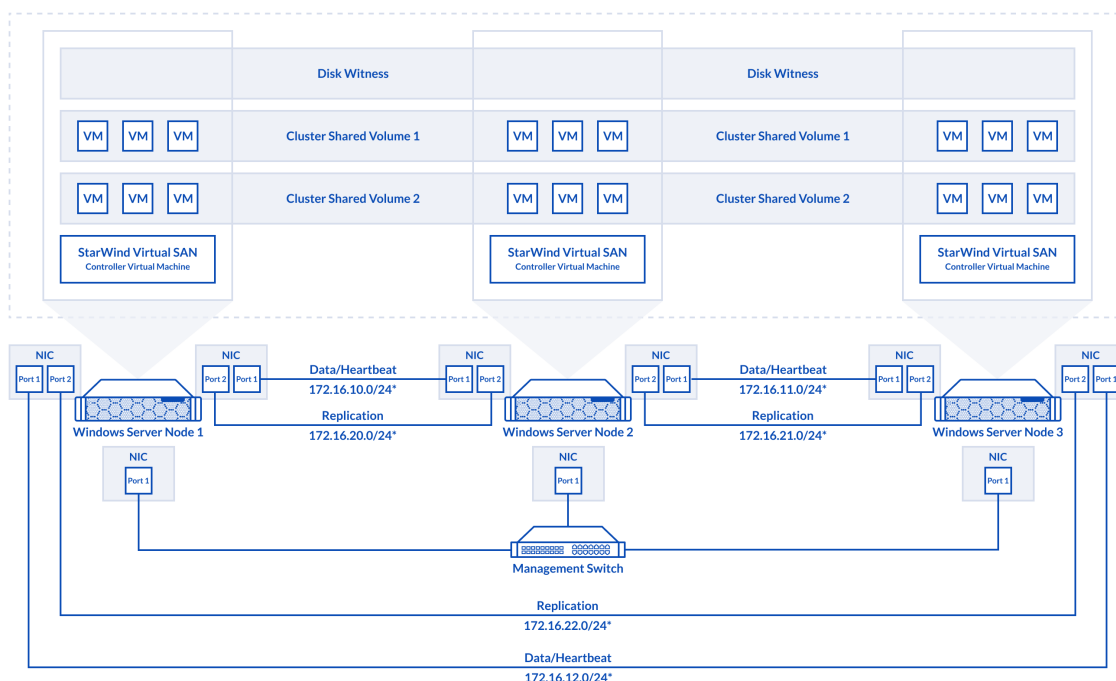

3-node cluster

### Preconfiguring cluster nodes

1. Make sure that a domain controller is configured and the servers are added to the domain.


NOTE: Please follow the recommendation in [KB article](#) on how to place a DC in case of StarWind Virtual SAN usage.

2. Deploy Windows Server on each server and install Failover Clustering and Multipath I/O features, as well as the Hyper-V role on both servers. This can be done through Server Manager (Add Roles and Features menu item).

3. Define at least 2x network interfaces (2 node scenario) or 4x network interfaces (3 node scenario) on each node that will be used for the Synchronization and iSCSI/StarWind heartbeat traffic. Do not use iSCSI/Heartbeat and Synchronization channels over the same physical link. Synchronization and iSCSI/Heartbeat links can be connected either via redundant switches or directly between the nodes (see diagram above).

4. Separate external Virtual Switches should be created for iSCSI and Synchronization traffic based on the selected before iSCSI and Synchronization interfaces. Using Hyper-V

Manager open Virtual Switch Manager and create two external Virtual Switches: one for the iSCSI/StarWind Heartbeat channel (iSCSI) and another one for the Synchronization channel (Sync).

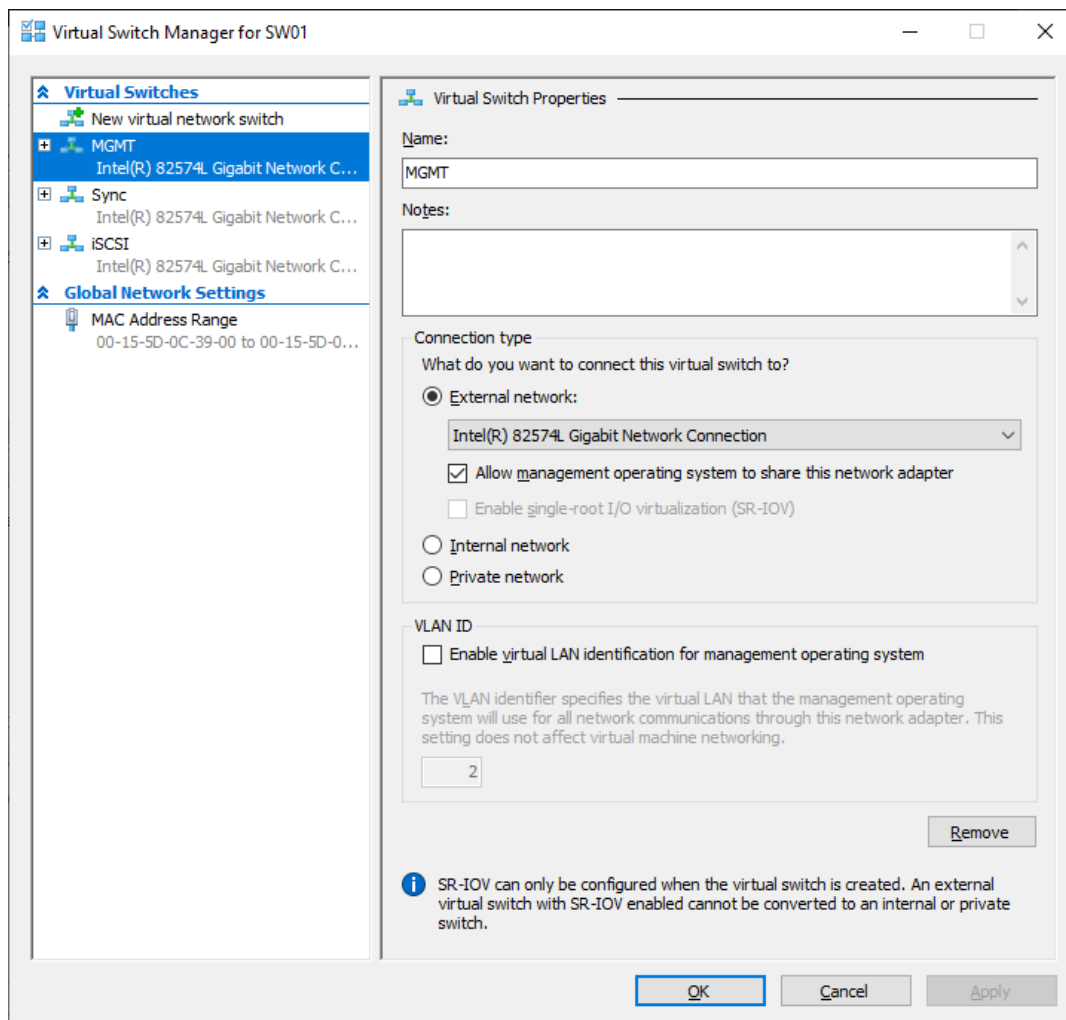

5. Configure and set the IP address on each virtual switch interface. In this document, 172.16.1x.x subnets are used for iSCSI/StarWind heartbeat traffic, while 172.16.2x.x subnets are used for the Synchronization traffic.

NOTE: In case NIC supports SR-IOV, enable it for the best performance. An additional internal switch is required for iSCSI Connection. Contact support for additional details.

6. Set MTU size to 9000 on iSCSI and Sync interfaces using the following Powershell script.

```
$iSCSIs = (Get-NetAdapter -Name "*iSCSI*").Name
$Syncs = (Get-NetAdapter -Name "*Sync*").Name
foreach ($iSCSI in $iSCSIs) {
```

```
Set-NetAdapterAdvancedProperty -Name "$iSCSI" -RegistryKeyword
"*JumboPacket" -Registryvalue 9014
Get-NetAdapterAdvancedProperty -Name "$iSCSI" -RegistryKeyword
"*JumboPacket"
}
foreach ($Sync in $Syncs) {
Set-NetAdapterAdvancedProperty -Name "$Sync" -RegistryKeyword
"*JumboPacket" -Registryvalue 9014
Get-NetAdapterAdvancedProperty -Name "$Sync" -RegistryKeyword
"*JumboPacket"
}
```


It will apply MTU 9000 to all iSCSI and Sync interfaces if they have iSCSI or Sync as part of their name.

NOTE: MTU setting should be applied on the adapters only if there is no live production running through the NICs.

7. Open the MPIO Properties manager: Start -> Windows Administrative Tools -> MPIO. Alternatively, run the following PowerShell command :

```
mpiocpl
```

8. In the Discover Multi-Paths tab, select the Add support for iSCSI devices checkbox and click Add.

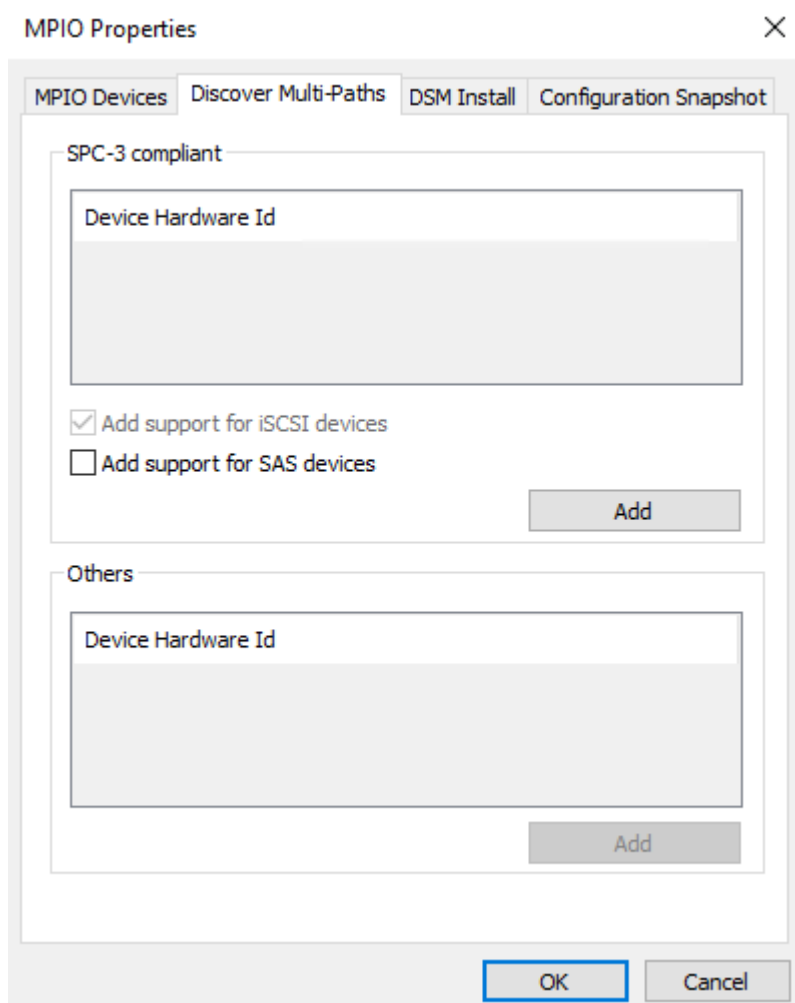

9. When prompted to restart the server, click Yes to proceed.

10. Repeat the same procedure on the other server.


## Installing File Server Roles

Please follow the steps below if file shares configuration is required

## Scale-Out File Server (Sofs) For Application Data

1. Open Server Manager: Start -> Server Manager.
2. Select: Manage -> Add Roles and Features.
3. Follow the installation wizard steps to install the roles selected in the screenshot


below:

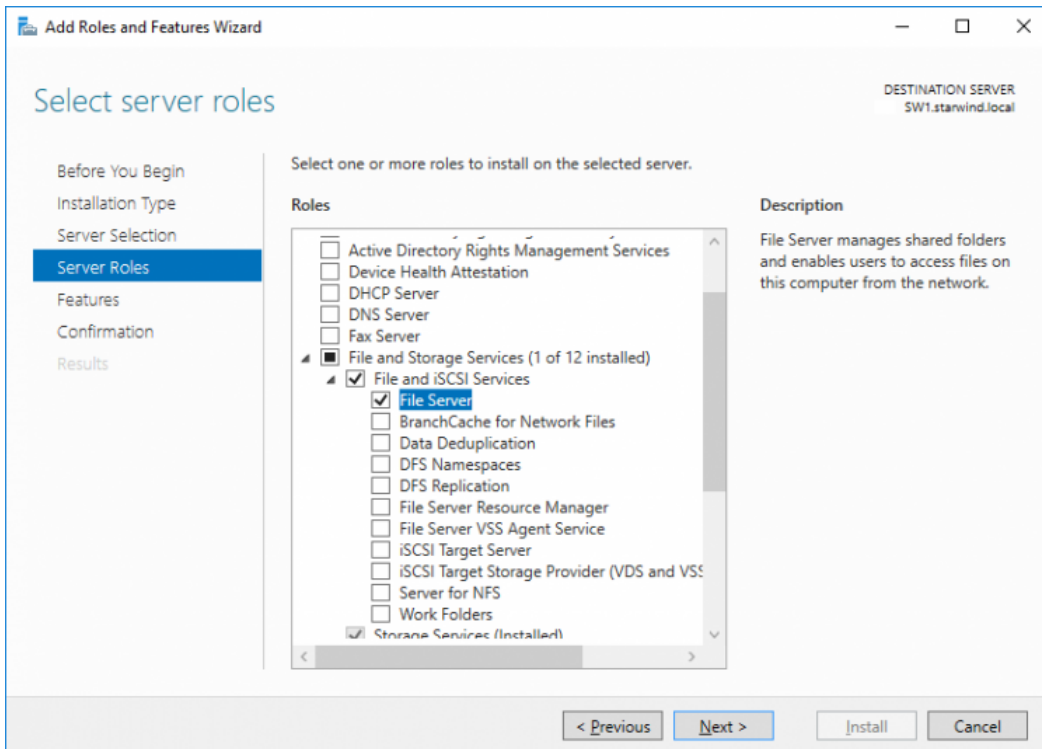

4. Restart the server after installation is completed and perform steps above on the each server.

## File Server For General Use With Smb Share


1. Open Server Manager: Start -> Server Manager.
2. Select: Manage -> Add Roles and Features.
3. Follow the installation wizard steps to install the roles selected in the screenshot below:

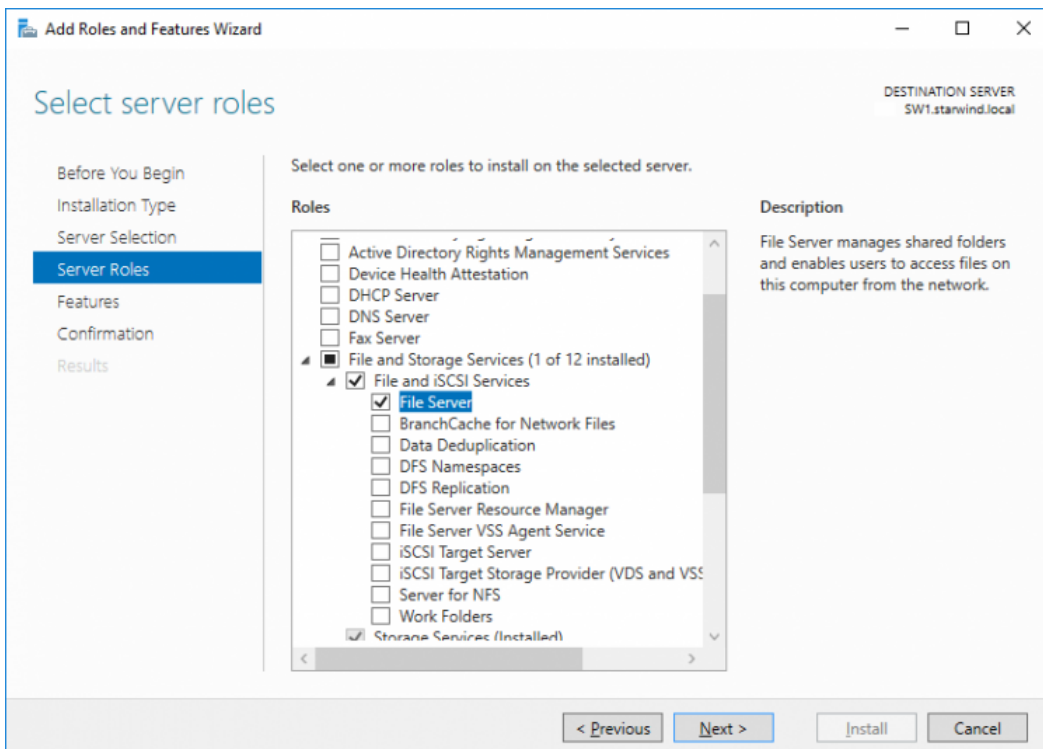

4. Restart the server after installation is completed and perform steps above on each server.

## File Server For General Use With Nfs Share


1. Open Server Manager: Start -> Server Manager.
2. Select: Manage -> Add Roles and Features.
3. Follow the installation wizard steps to install the roles selected in the screenshot below:

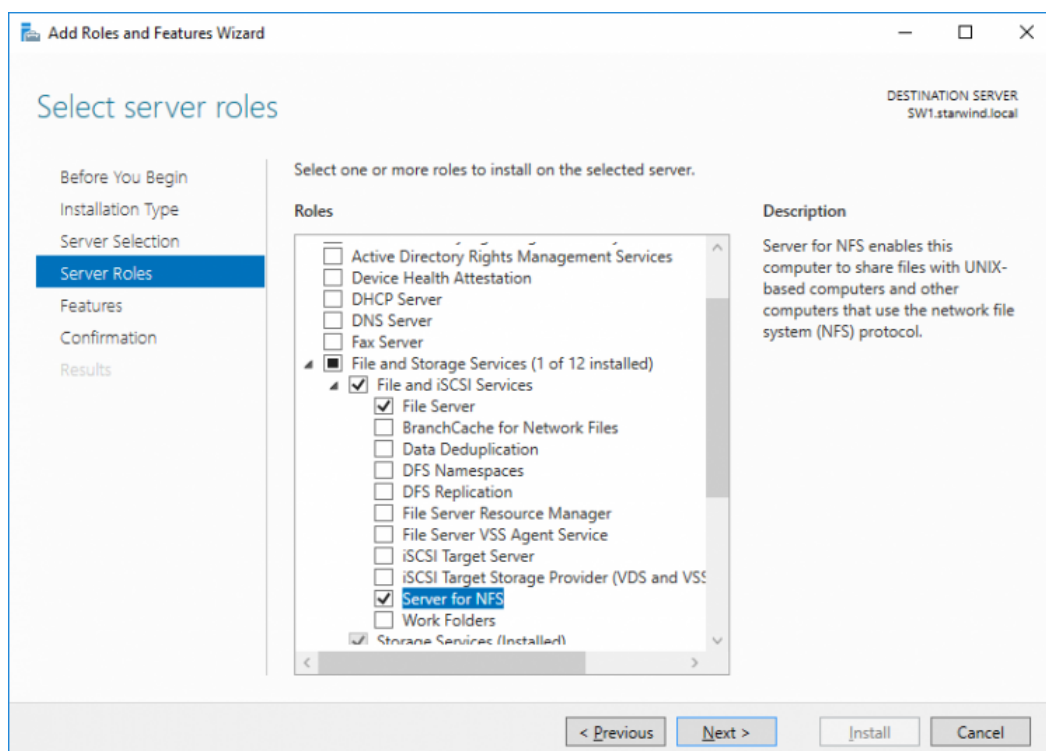

4. Restart the server after installation is completed and perform steps above on each server.

## Deploying Starwind Virtual San Cvm


1. Download StarWind VSAN CVM to the Hyper-V server:  
[VSAN by StarWind: Overview](#)
2. Extract the VM .vhdx file from the downloaded archive.
3. Open Hyper-V Manager and create a new Hyper-V VM.
4. Specify the name of the virtual machine with StarWind VSAN, and choose the location for the VM. For example: C:\SW1\

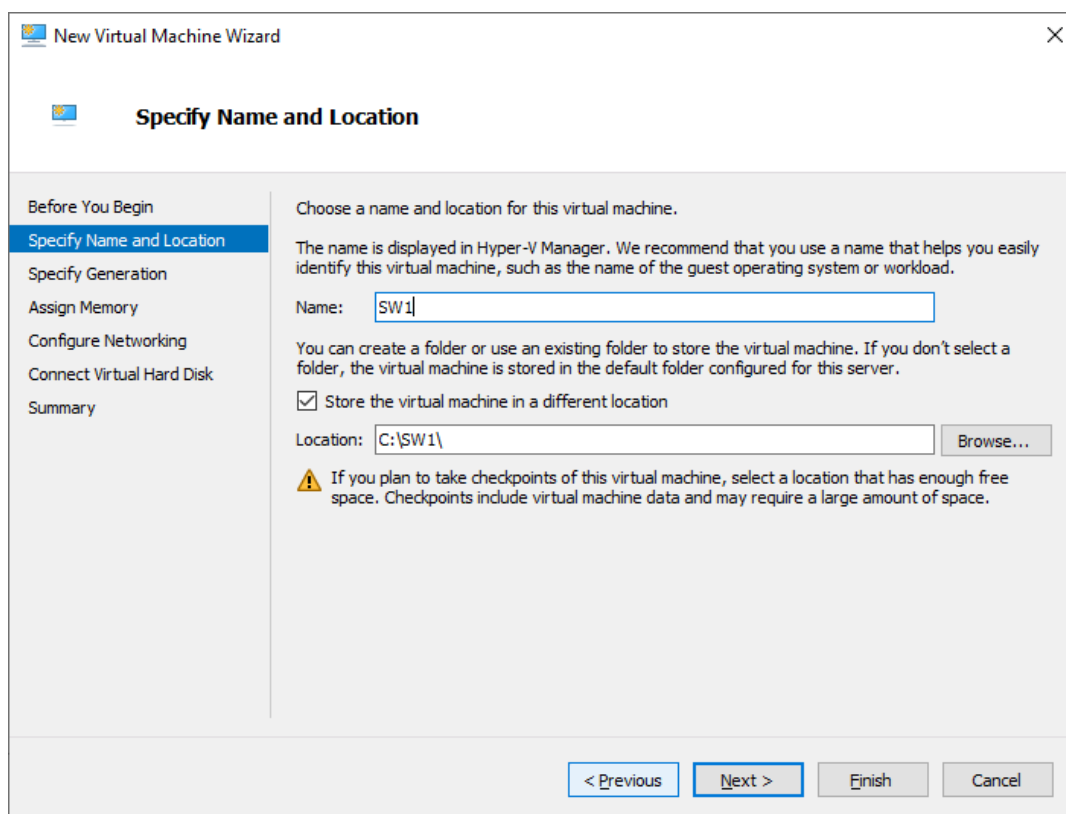


5. Copy .vhdx to the folder where the VM was created. In this case, its C:\ SW1\Virtual Hard Disks\

6. Choose Generation 2 VM.



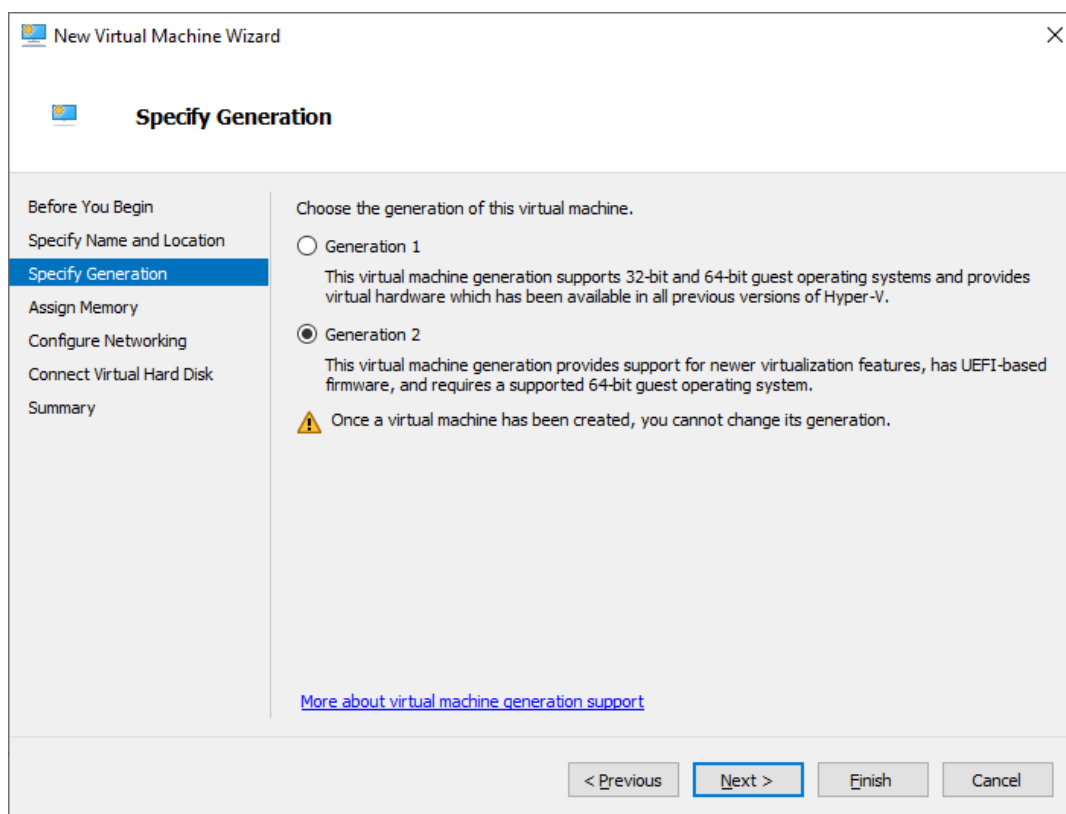

7. Assign memory to the VM. We recommend allocating at least 8GB of RAM for StarWind CVM. If StarWind L1 cache is used, an appropriate amount of RAM should be assigned.

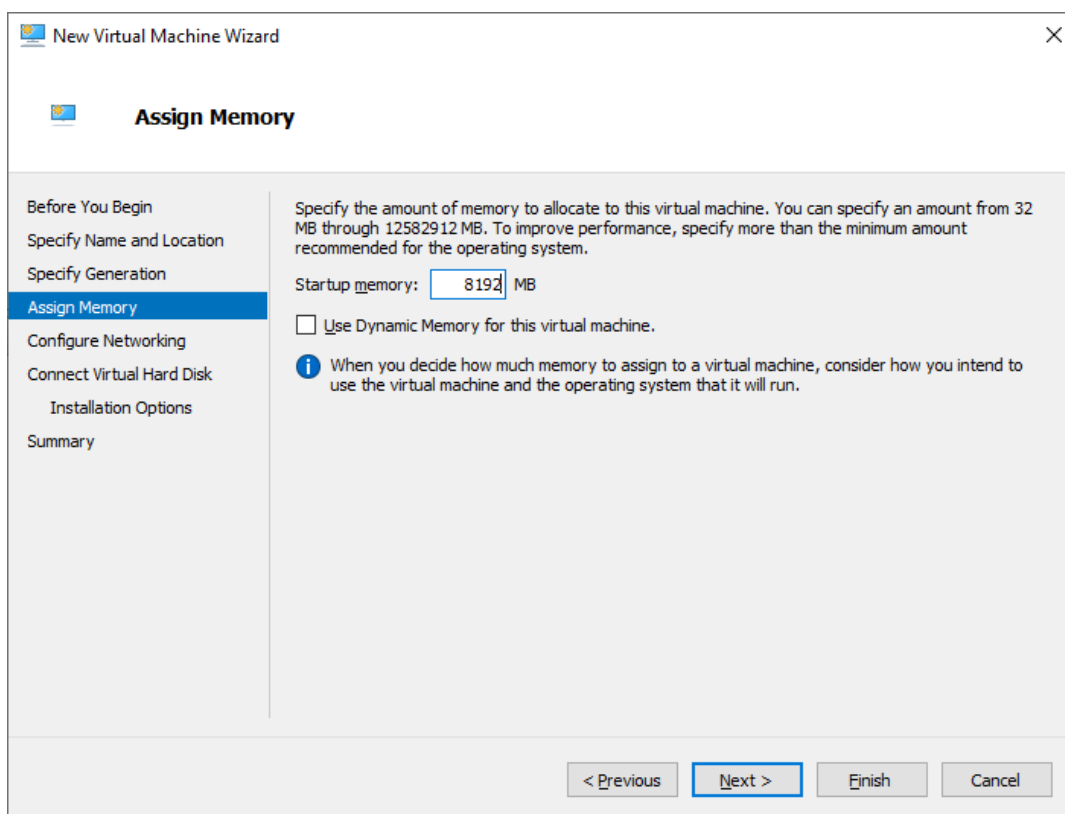

**New Virtual Machine Wizard**

**Assign Memory**

Before You Begin  
Specify Name and Location  
Specify Generation  
**Assign Memory**  
Configure Networking  
Connect Virtual Hard Disk  
Installation Options  
Summary

Specify the amount of memory to allocate to this virtual machine. You can specify an amount from 32 MB through 12582912 MB. To improve performance, specify more than the minimum amount recommended for the operating system.


Startup memory:  MB

☐ Use Dynamic Memory for this virtual machine.

**i** When you decide how much memory to assign to a virtual machine, consider how you intend to use the virtual machine and the operating system that it will run.

< Previous   **Next >**   Finish   Cancel

8. Choose the management network for the VM.

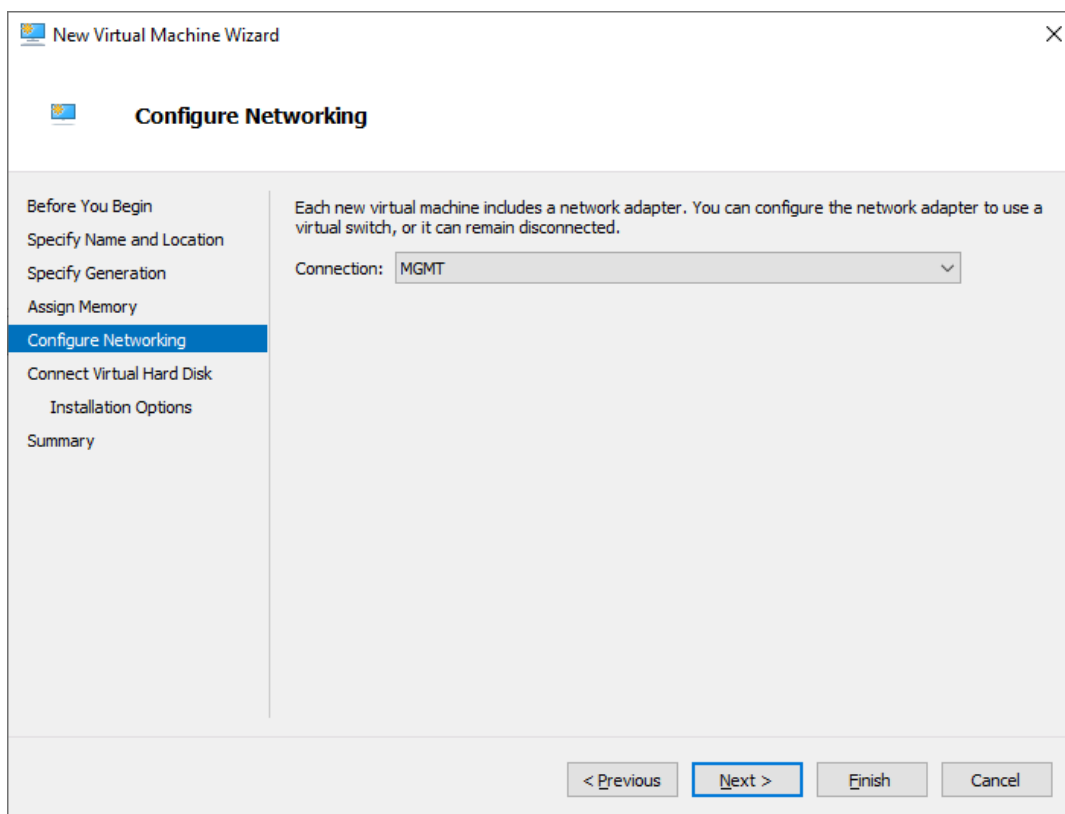

**New Virtual Machine Wizard**

**Configure Networking**


Before You Begin  
Specify Name and Location  
Specify Generation  
Assign Memory  
**Configure Networking**  
Connect Virtual Hard Disk  
Installation Options  
Summary

Each new virtual machine includes a network adapter. You can configure the network adapter to use a virtual switch, or it can remain disconnected.

Connection:

< Previous   **Next >**   Finish   Cancel

9. Connect .vhdx to the VM.

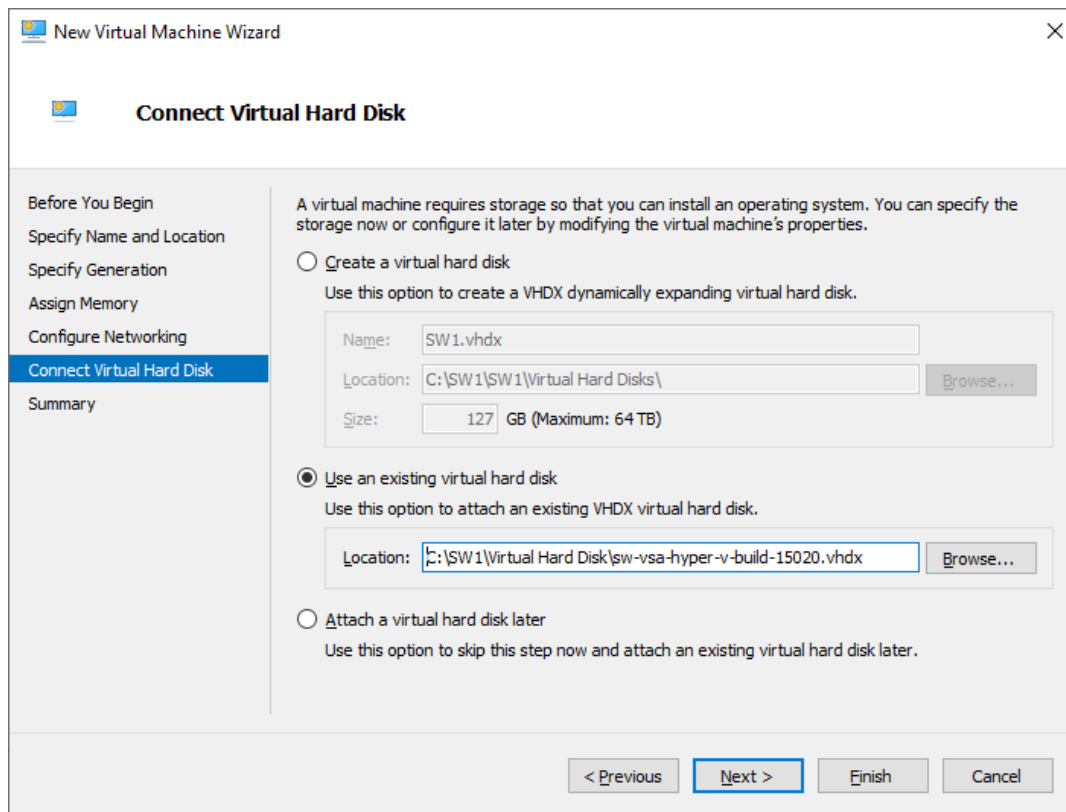

**New Virtual Machine Wizard**

**Connect Virtual Hard Disk**

Before You Begin  
Specify Name and Location  
Specify Generation  
Assign Memory  
Configure Networking  
**Connect Virtual Hard Disk**  
Summary

A virtual machine requires storage so that you can install an operating system. You can specify the storage now or configure it later by modifying the virtual machine's properties.

☐ Create a virtual hard disk  
Use this option to create a VHDX dynamically expanding virtual hard disk.

Name:   
Location:    
Size:  GB (Maximum: 64 TB)


☒ Use an existing virtual hard disk  
Use this option to attach an existing VHDX virtual hard disk.

Location:


☐ Attach a virtual hard disk later  
Use this option to skip this step now and attach an existing virtual hard disk later.

< Previous   **Next >**   Finish   Cancel


10. Review the Summary and click Finish to create the VM.

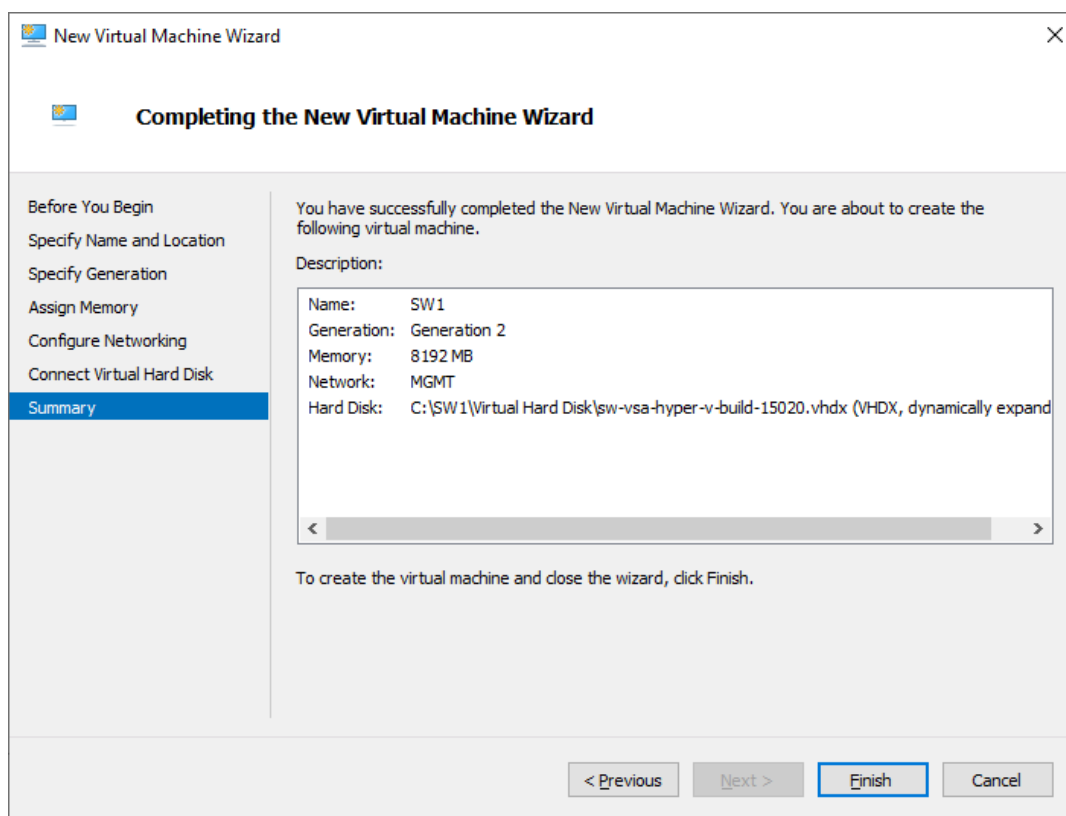


11. Right-click on the VM and choose Settings. Open Firmware and move the option Hard Drive to the first place in the list.

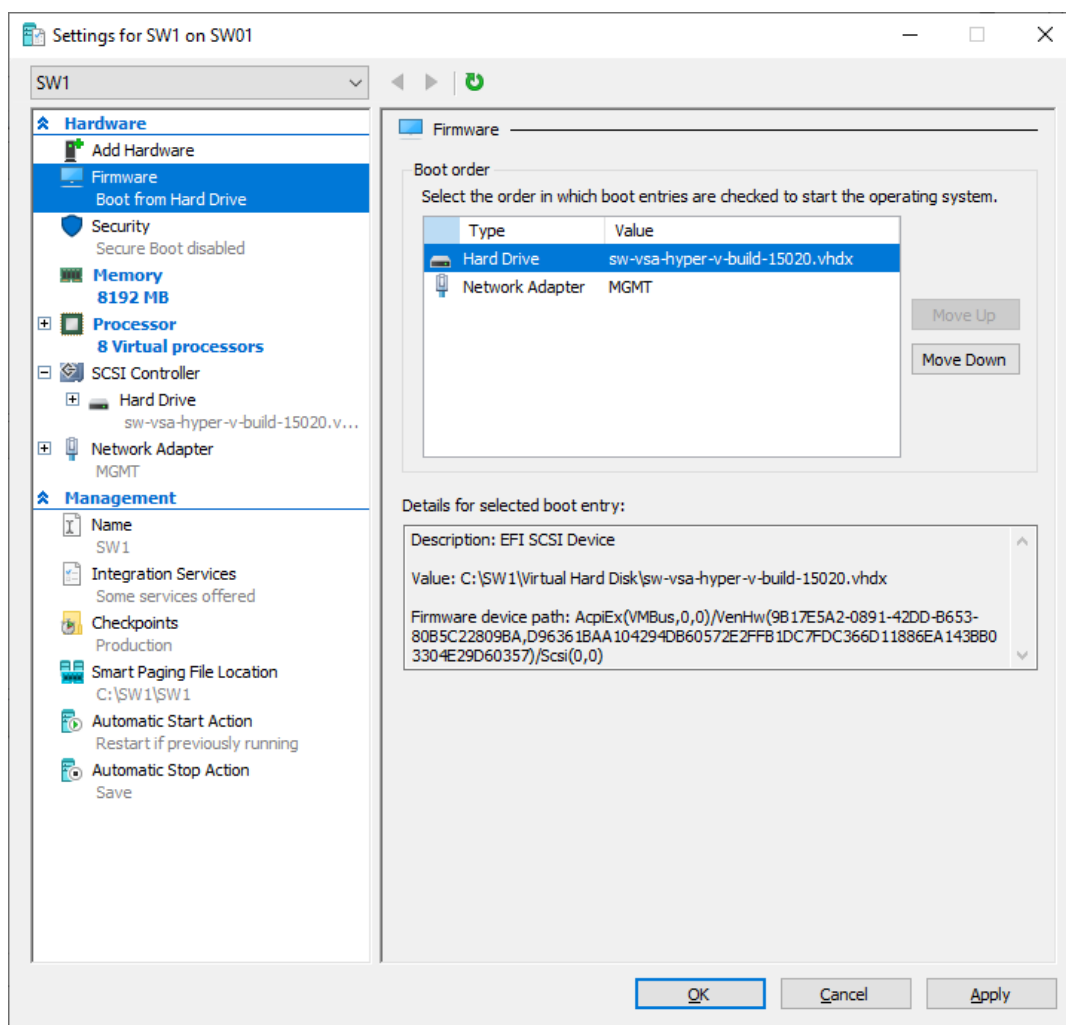


12. Go to the Security page and uncheck the Enable Secure Boot box.

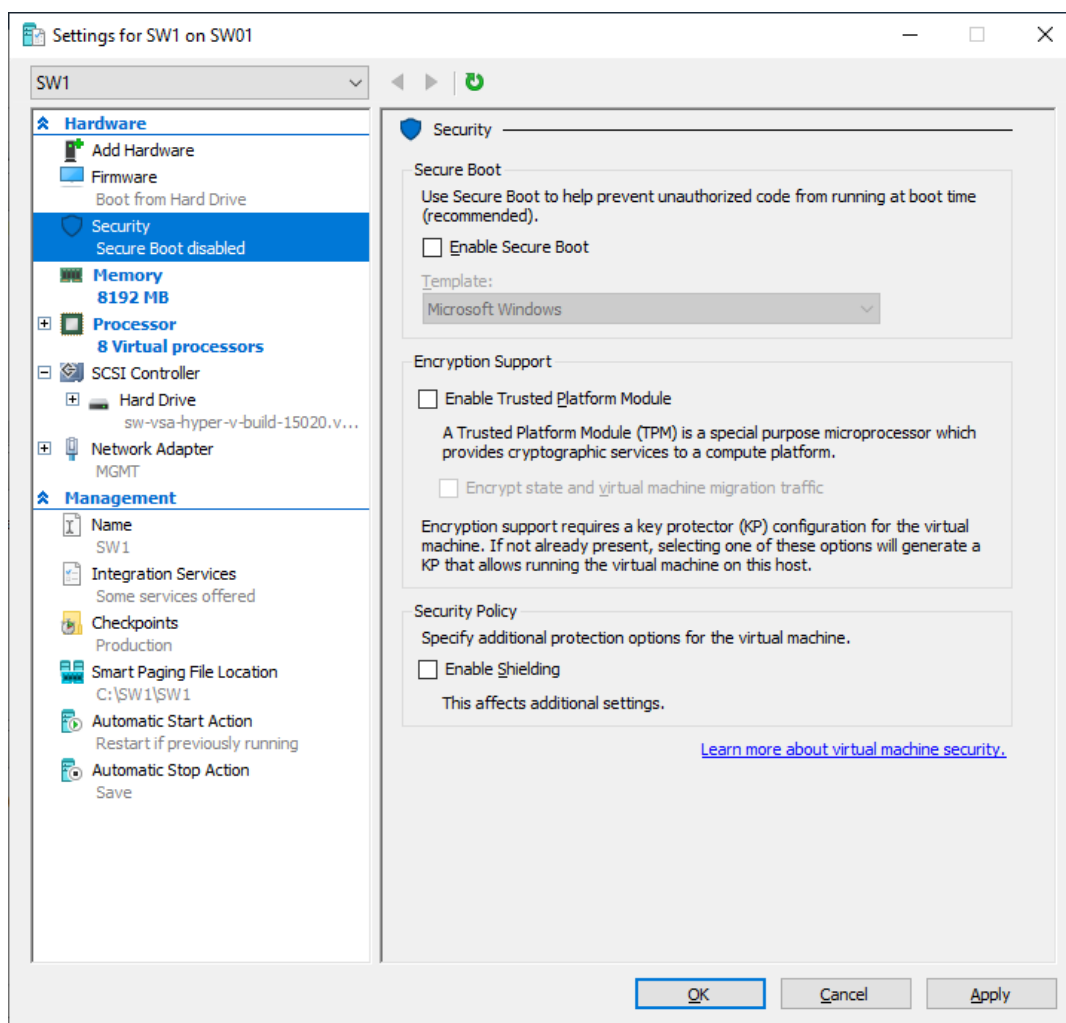

13. Go to Memory and move the slider for Memory weight to High.

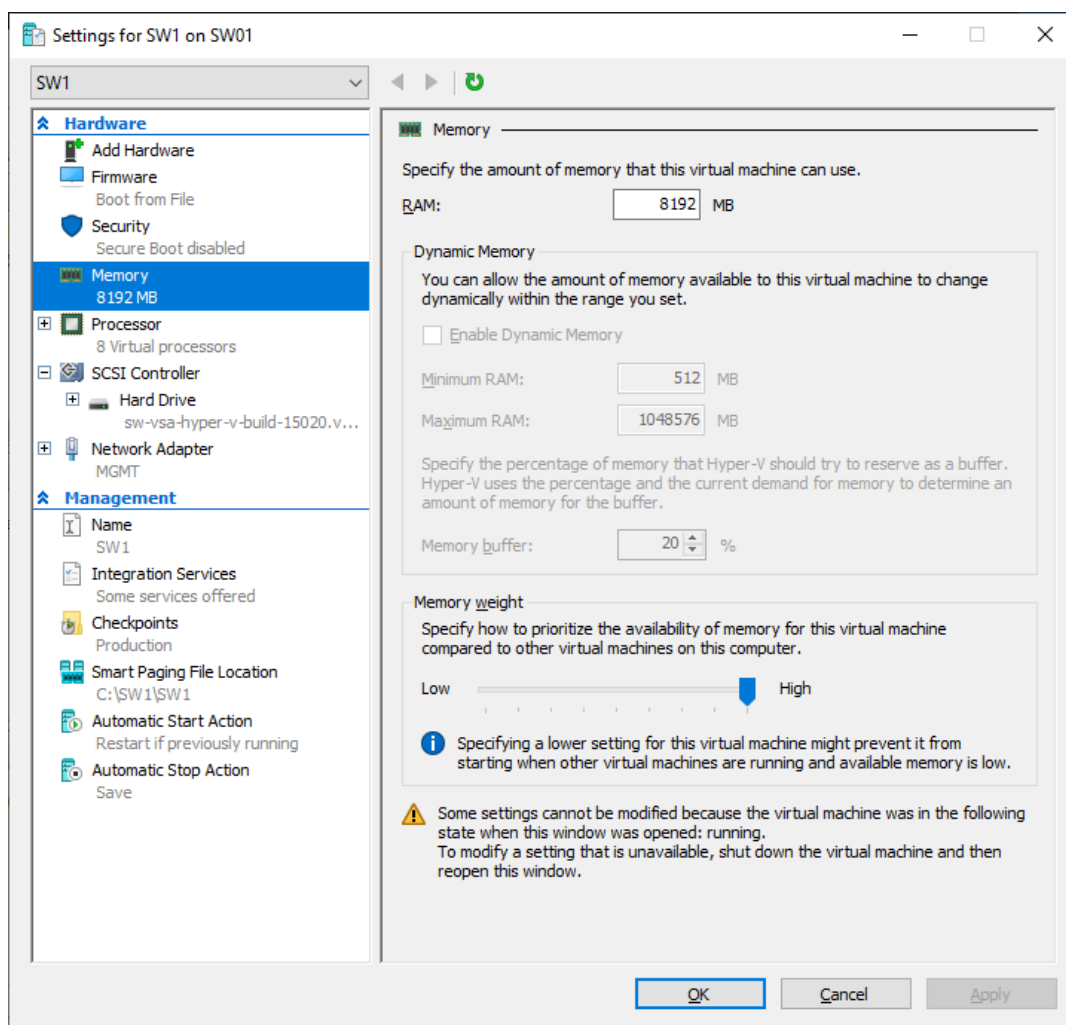



14. Go to Processor and assign 8 vCPUs to the VM.

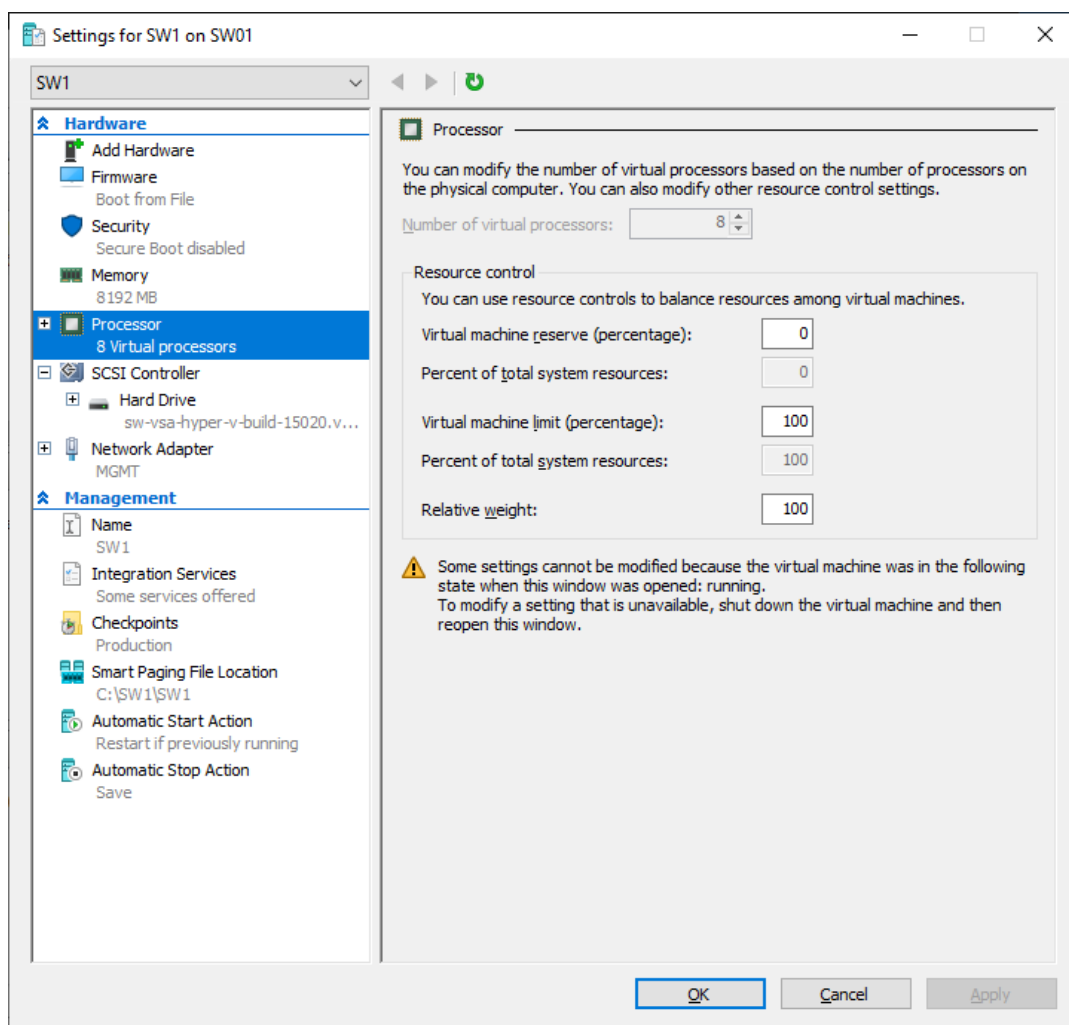


15. Click Add Hardware and add NICs for iSCSI and Synchronization traffic to the VM.



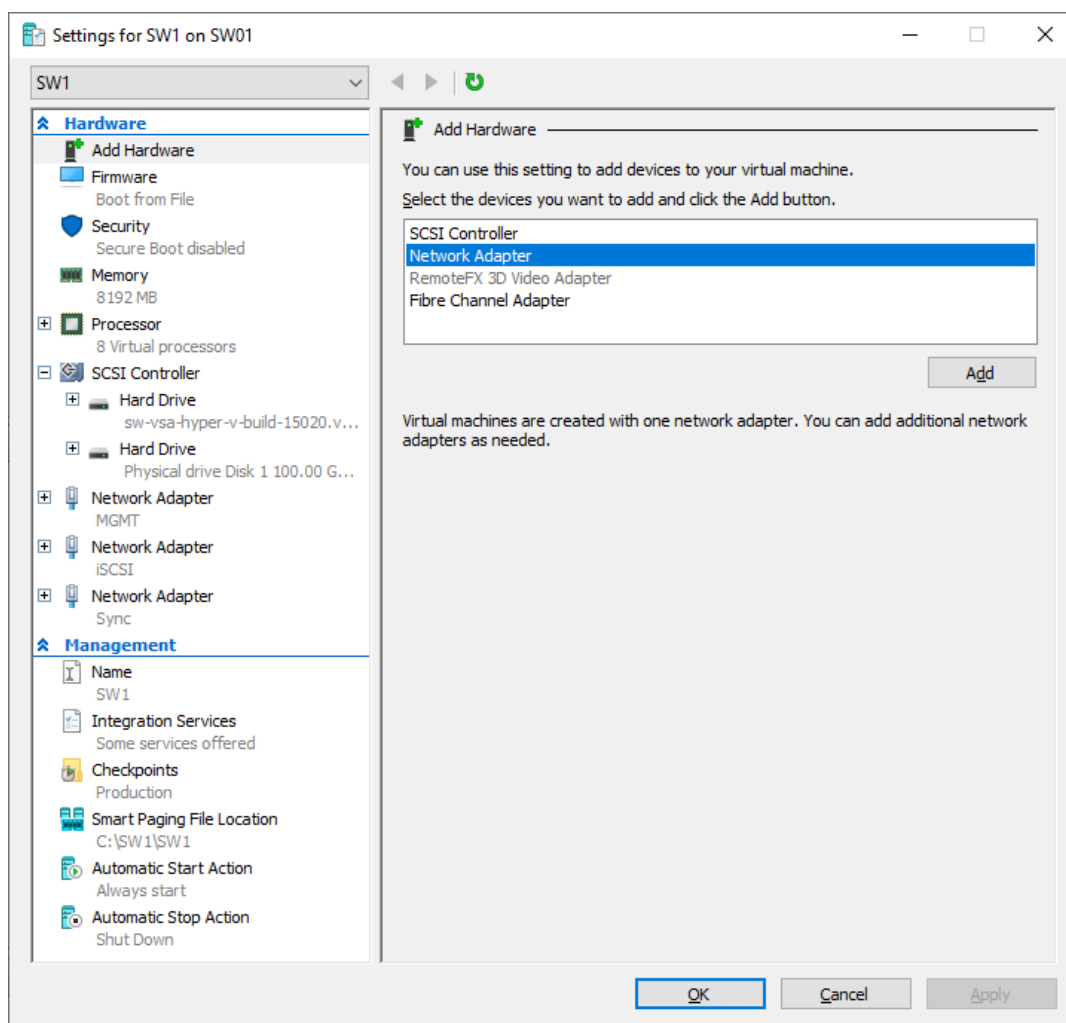


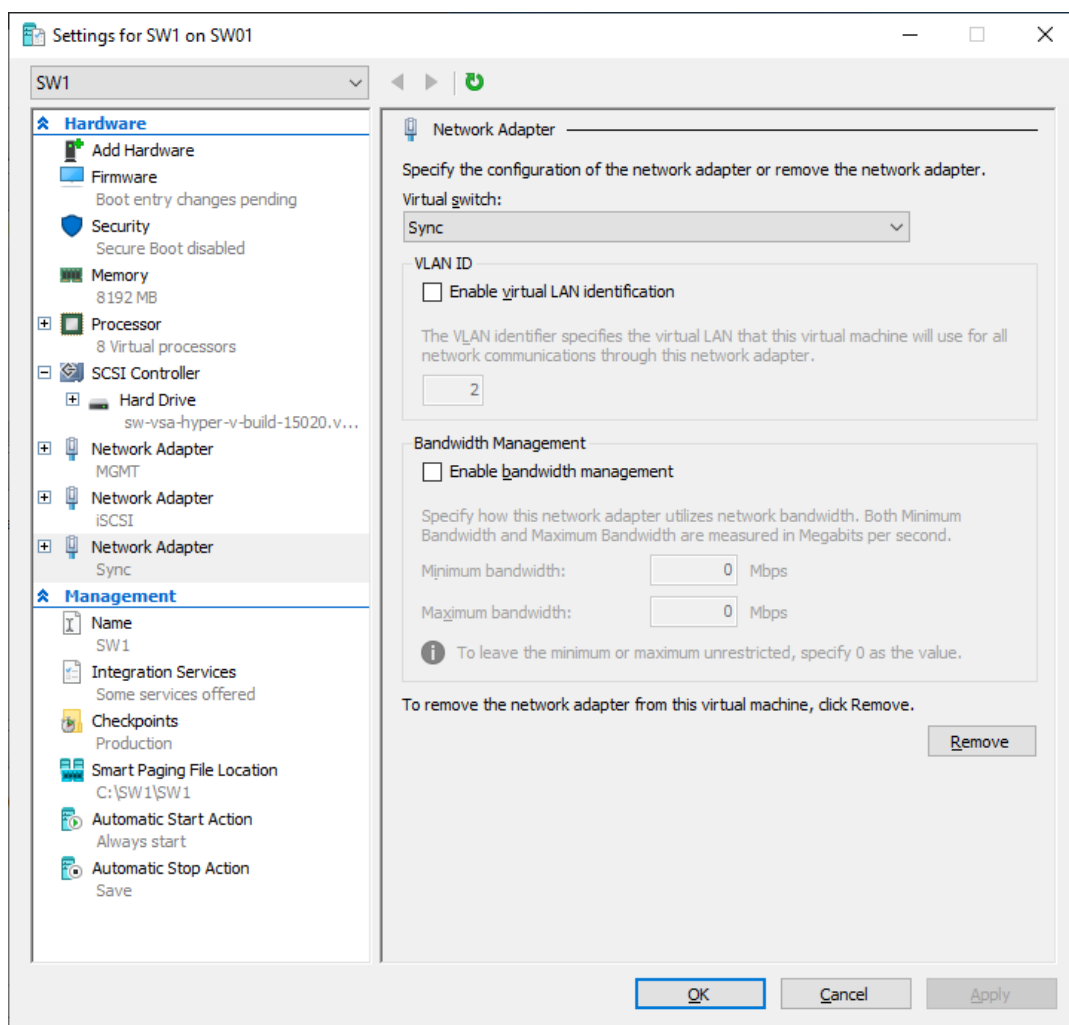

16. Configure Automatic Start and Stop actions, so the VM will always start automatically.

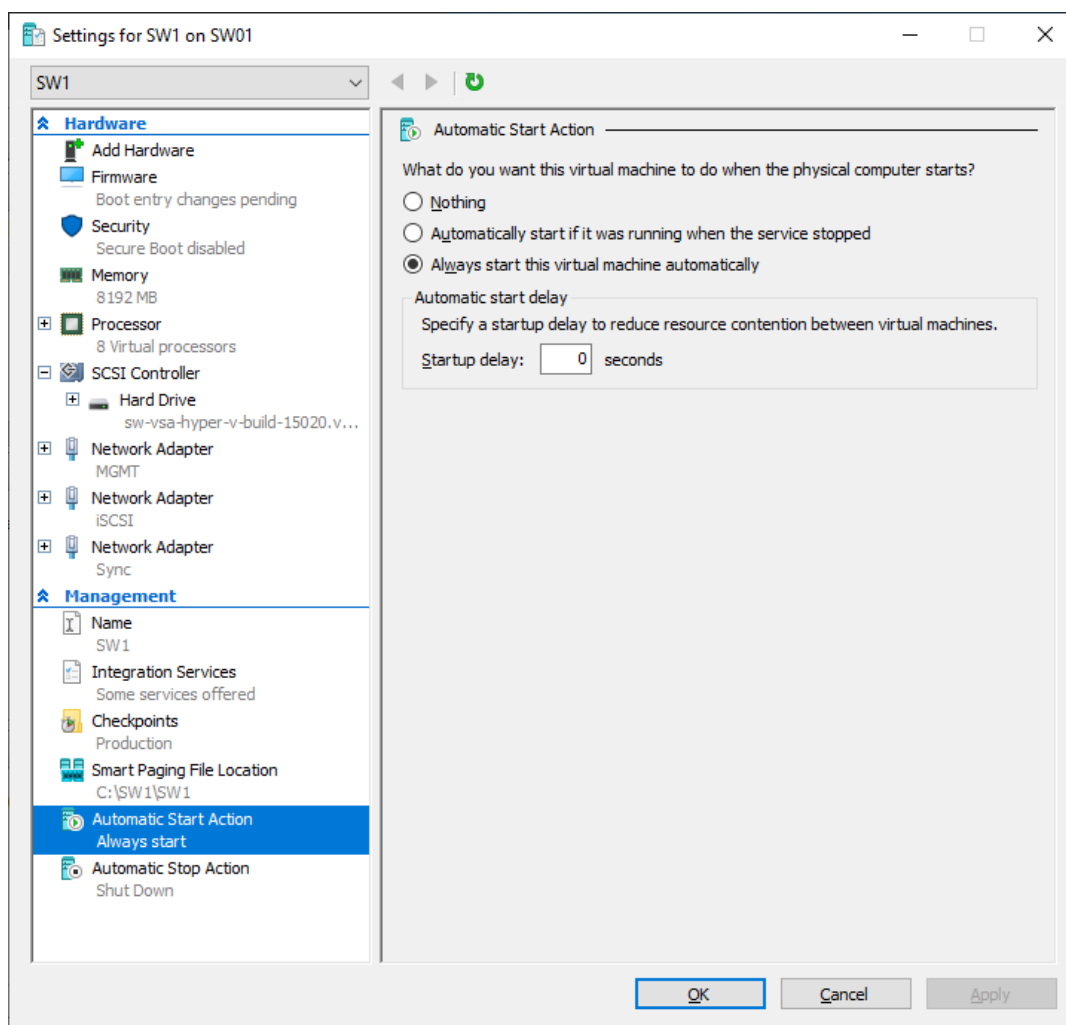

17. Choose Shut down the guest operating system as an Automatic Stop Action.

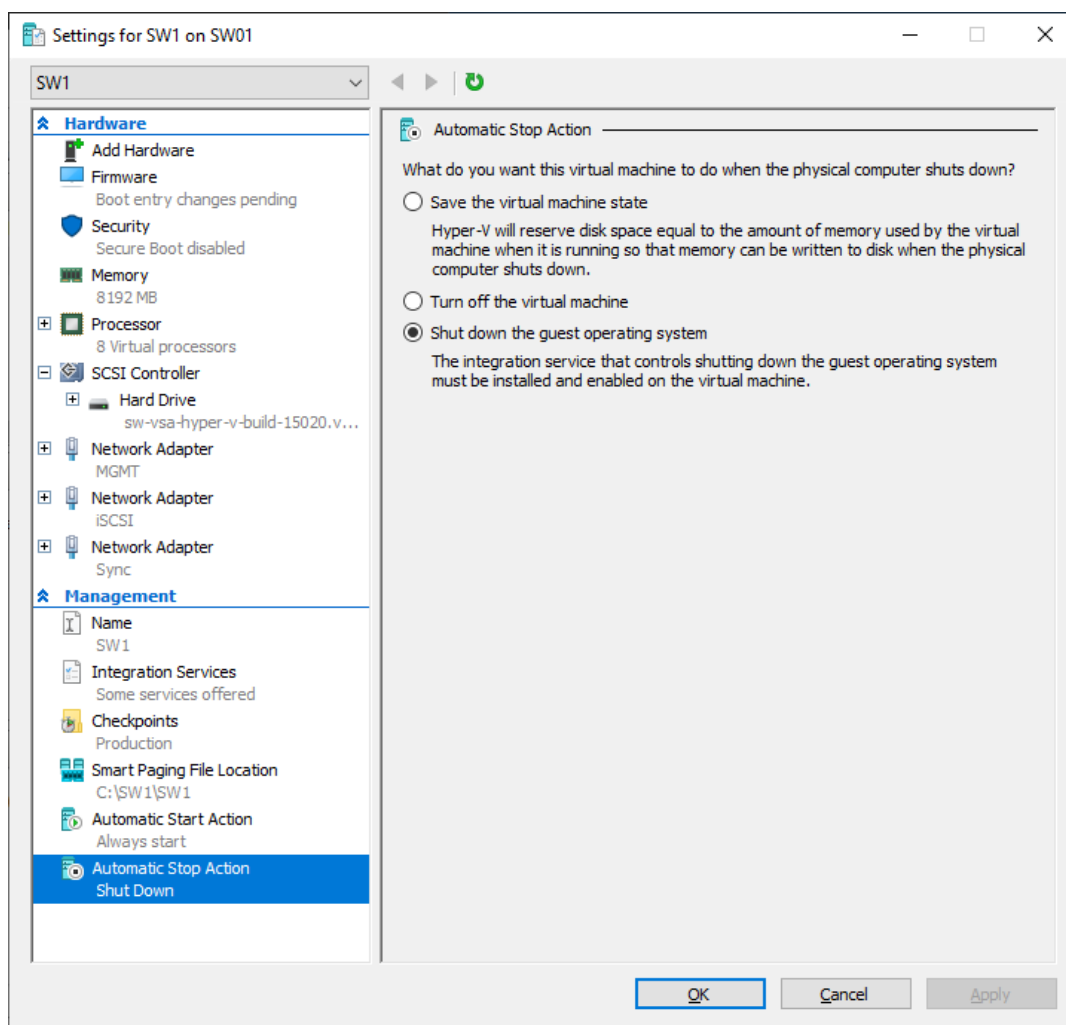


18. Repeat all the steps from this section on other Windows Server hosts.

19. Start virtual machines on all Windows Server hosts.

## Configuring Starwind Virtual San Vm Settings


1. Open the VM console and check the IP address received via DHCP (or which was assigned manually).

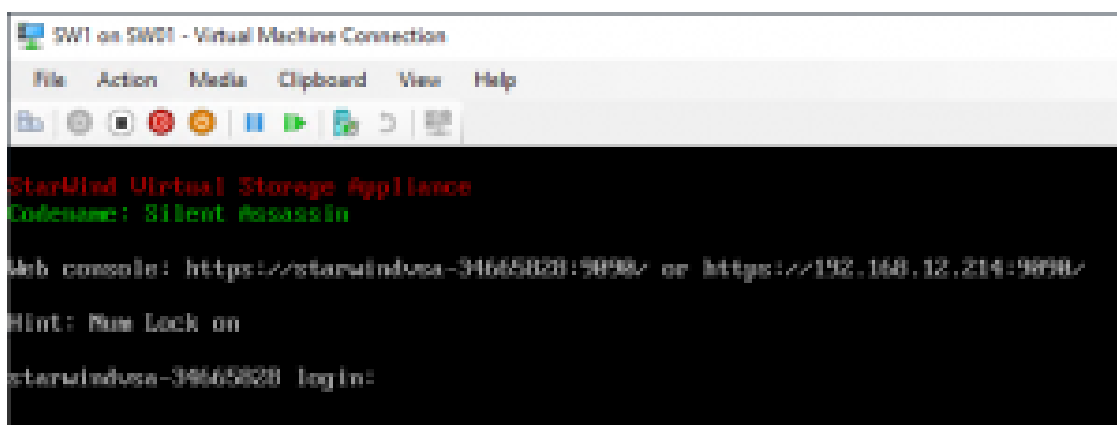

Another alternative is to log into the VM via console and assign static IP using nmcli if there is no DHCP,


2. Now, open the web browser and enter the IP address of the VM. Log into the VM using the following default credentials:

- username: user
- password: rds123RDS
- NOTE: Make sure to check the “Reuse my password for privileged tasks” box

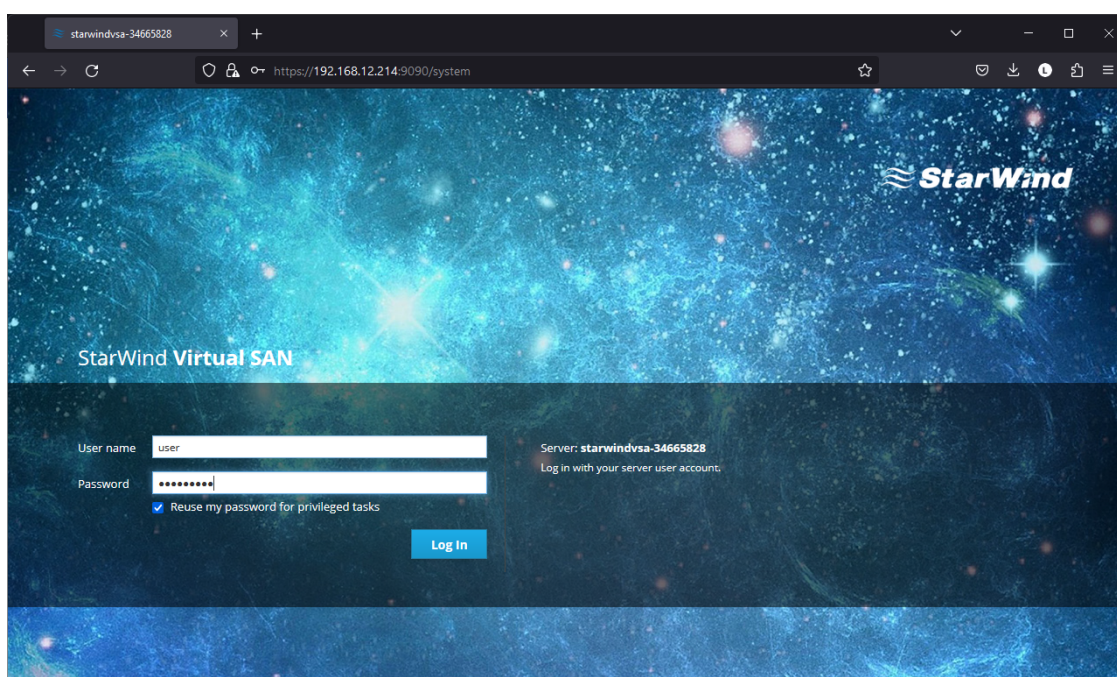


3. After a successful login, click Accounts on the left sidebar.

4. Select a user and click Set Password.

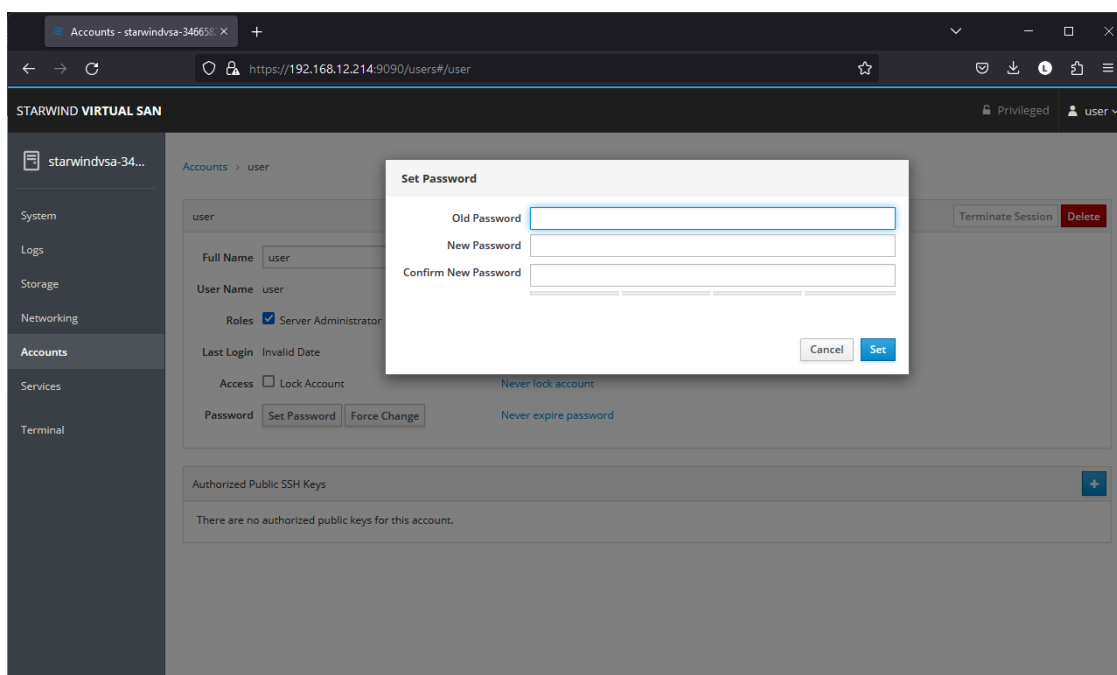


5. On the left sidebar, click Networking.

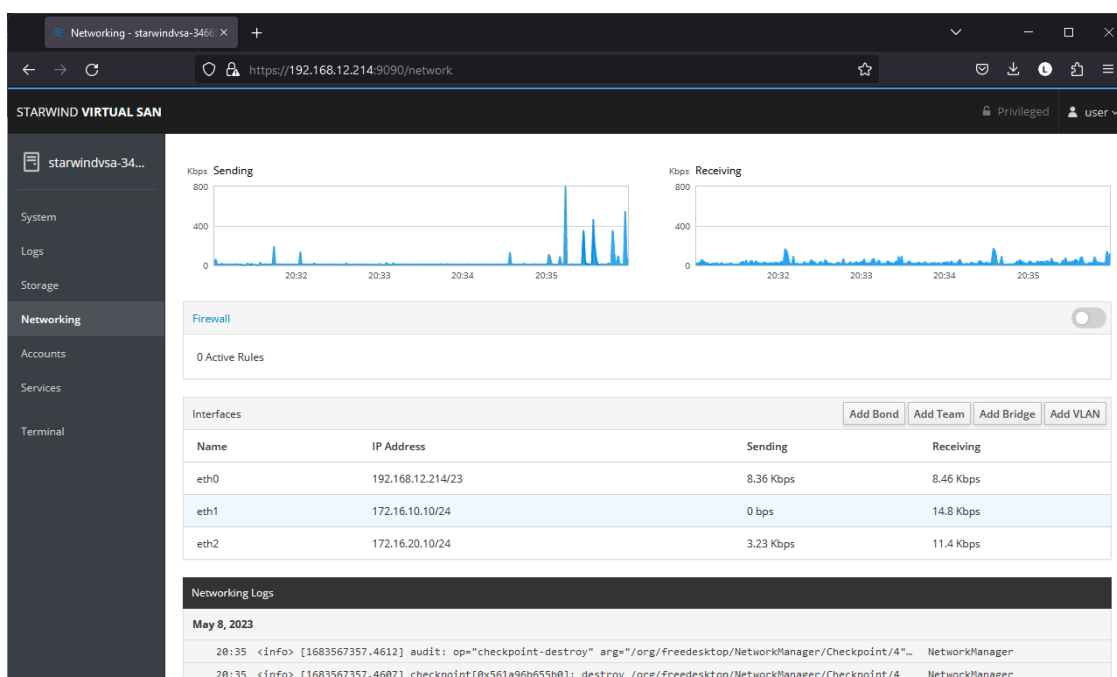


Here, the Management IP address of the StarWind Virtual SAN Virtual Machine can be configured, as well as IP addresses for iSCSI and Synchronization networks. In case the Network interface is inactive, click on the interface, turn it on, and set it to Connect automatically.


6. Click on Automatic (DHCP) to set the IP address (DNS and gateway – for Management).

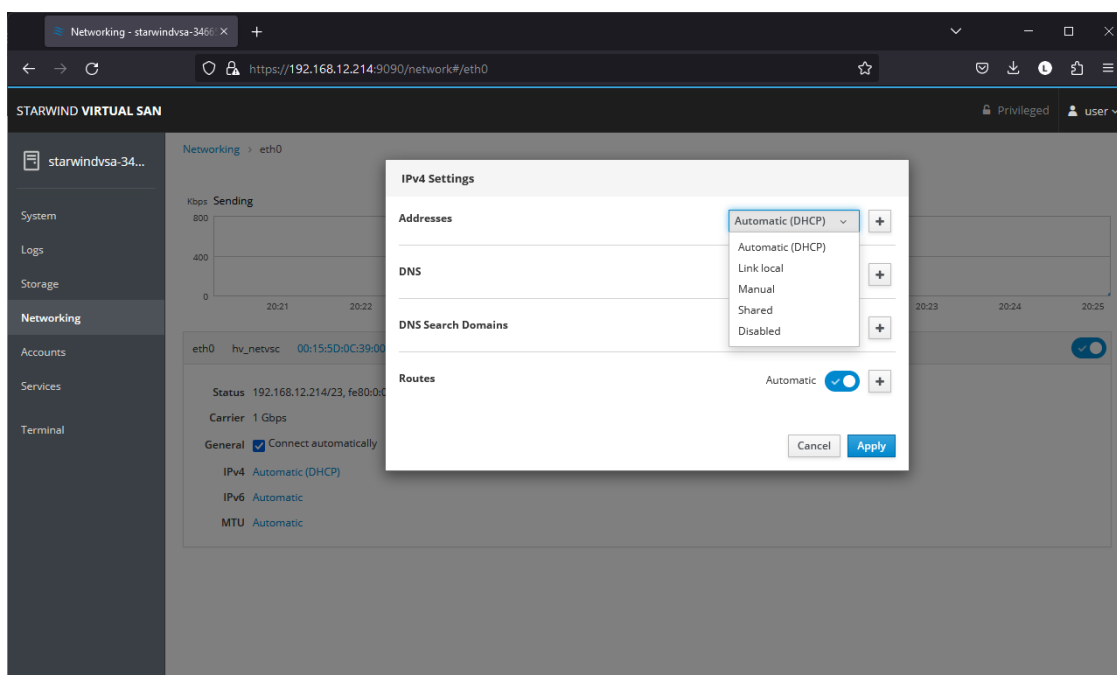

7. The result should look like in the picture below:

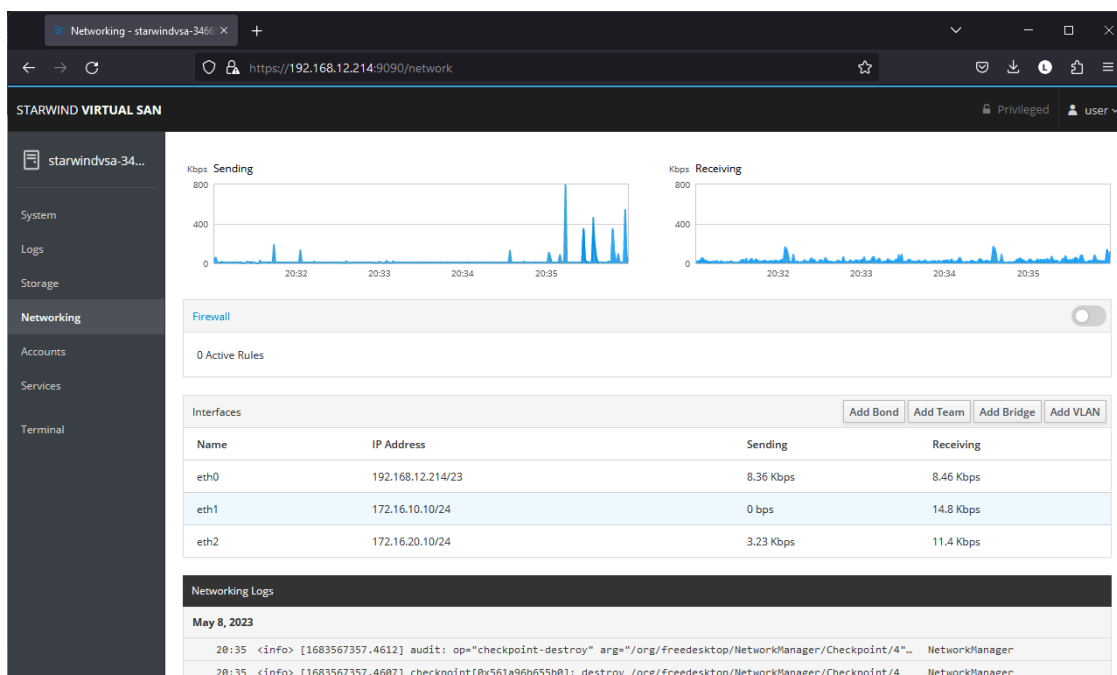

NOTE: It is recommended to set MTU to 9000 on interfaces dedicated for iSCSI and Synchronization traffic. Change Automatic to 9000, if required.

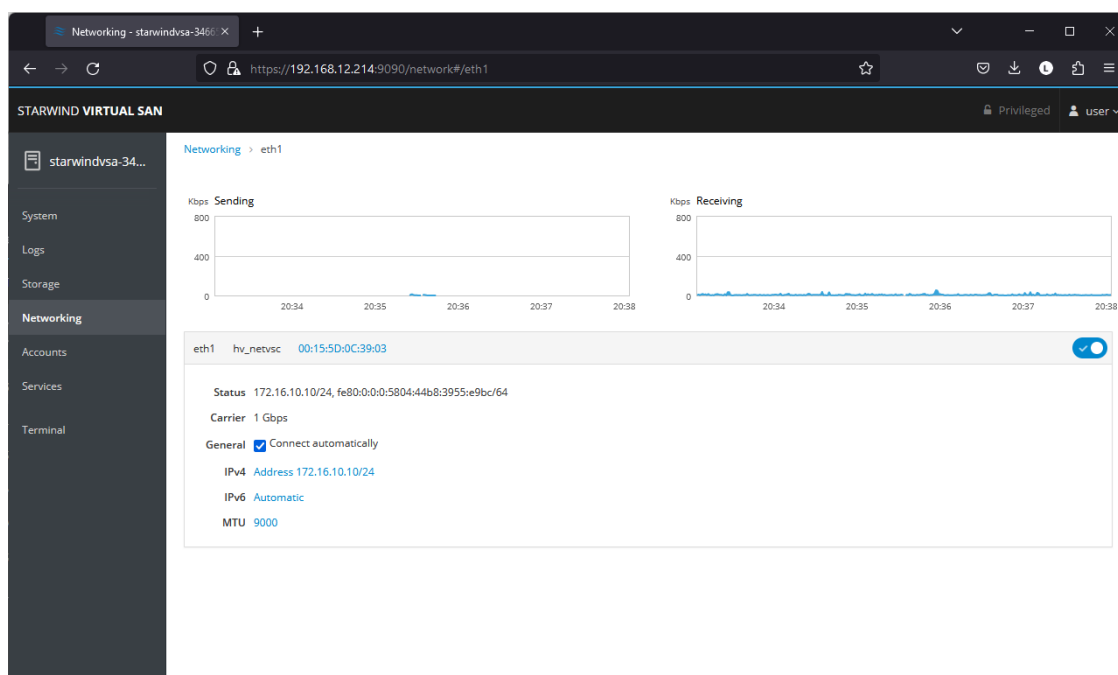

8. Alternatively, log into the VM via the VMware console and assign a static IP address by editing the configuration file of the interface located by the following path:  
/etc/sysconfig/network-scripts

9. Open the file corresponding to the Management interface using a text editor, for example: `sudo nano /etc/sysconfig/network-scripts/ifcfg-eth0`


10. Edit the file:

- change the line `BOOTPROTO=dhcp` to: `BOOTPROTO=static`
- add the IP settings needed to the file:
- `IPADDR=192.168.12.10`
- `NETMASK=255.255.255.0`
- `GATEWAY=192.168.12.1`
- `DNS1=192.168.1.1`


11. Restart the interface using the following cmdlet: `sudo ifdown eth0`, `sudo ifup eth0`, or restart the VM.

12. Change the Host Name from the System tab by clicking on it:



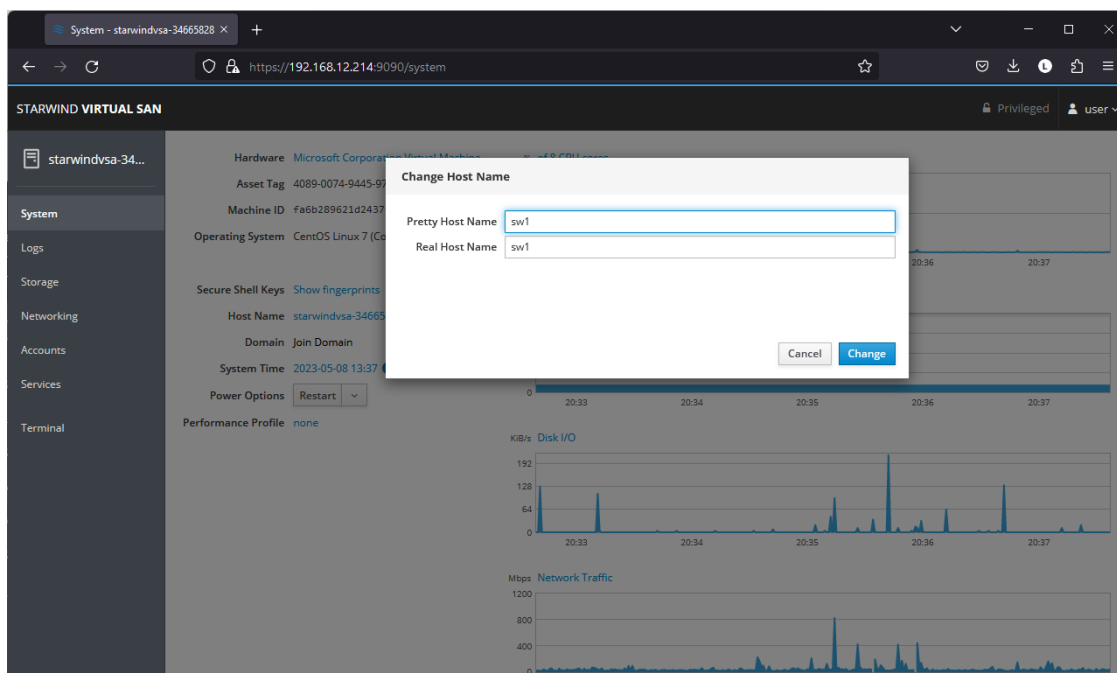

13. Change System time and NTP settings if required:

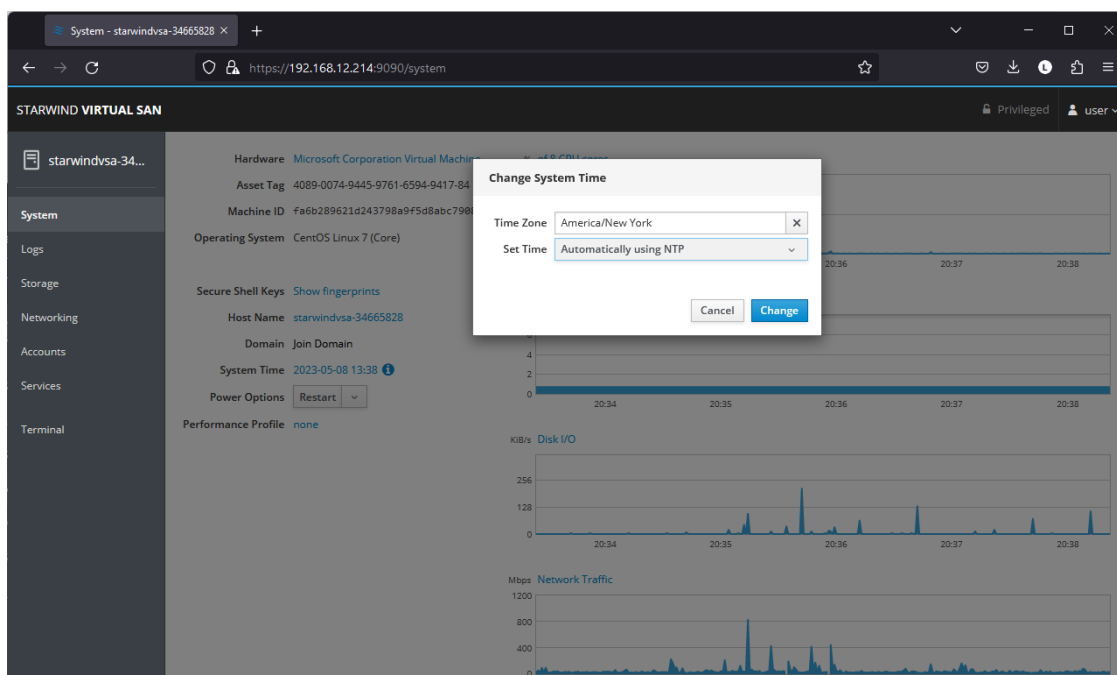

14. Repeat the steps above on each StarWind VSAN VM.

## Configuring Storage


StarWind Virtual SAN for vSphere can work on top of Hardware RAID or Linux Software RAID (MDADM) inside of the Virtual Machine.

Please select the required option:


## Configuring Storage With Hardware Raid

1. Open VM Settings in Hyper-V and add drive to the VM, which going to be used by StarWind service. It is recommended to pass the entire RAID array to the VM by selecting a physical hard disk option.


NOTE: Using virtual hard disks is not recommended due to potential performance issues. Thick provisioned virtual disks should be used to improve storage performance.

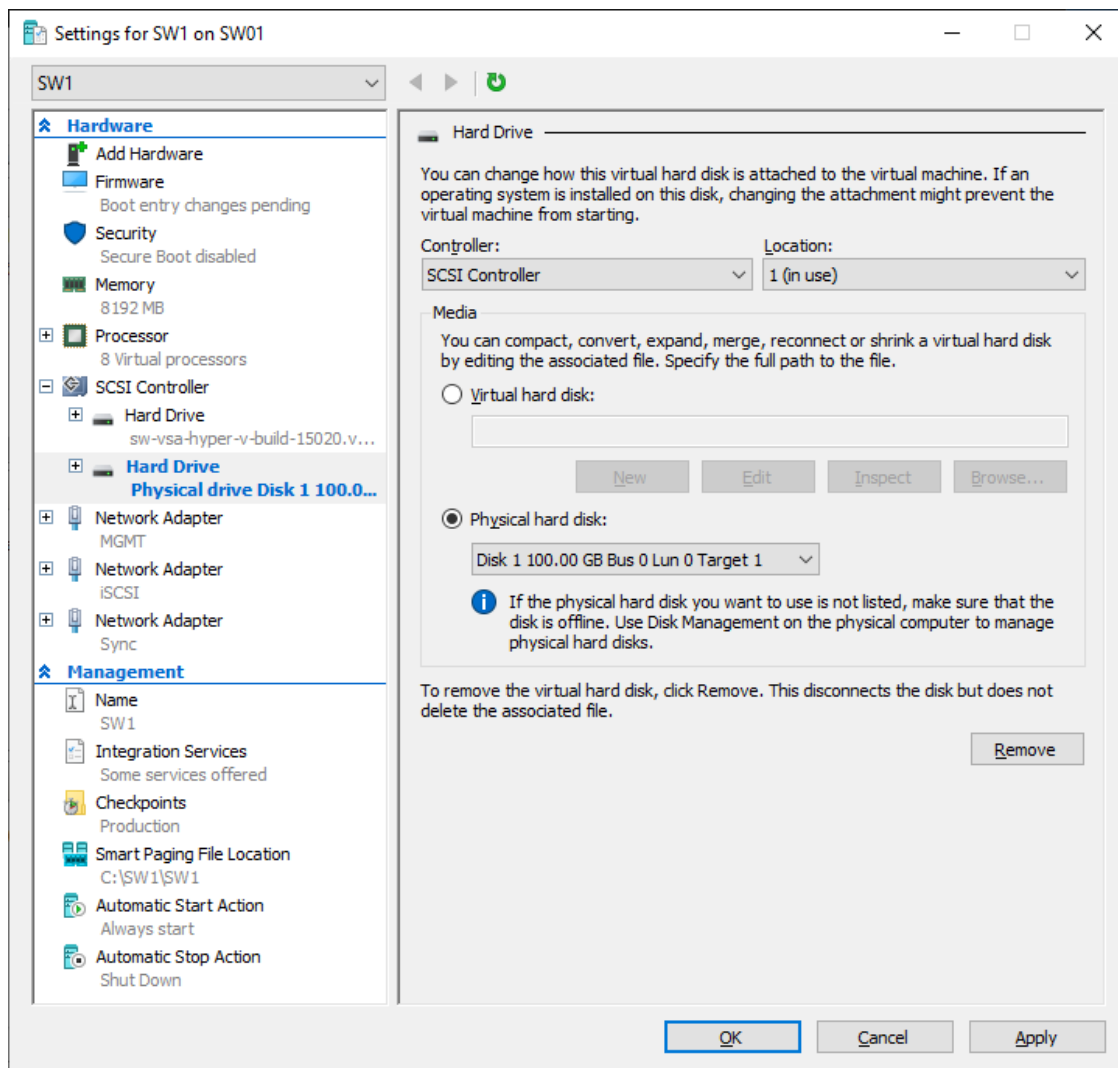


2. Login to StarWind VSAN VM web console and access the Storage section. Locate the recently added disk in the Drives section and choose it.

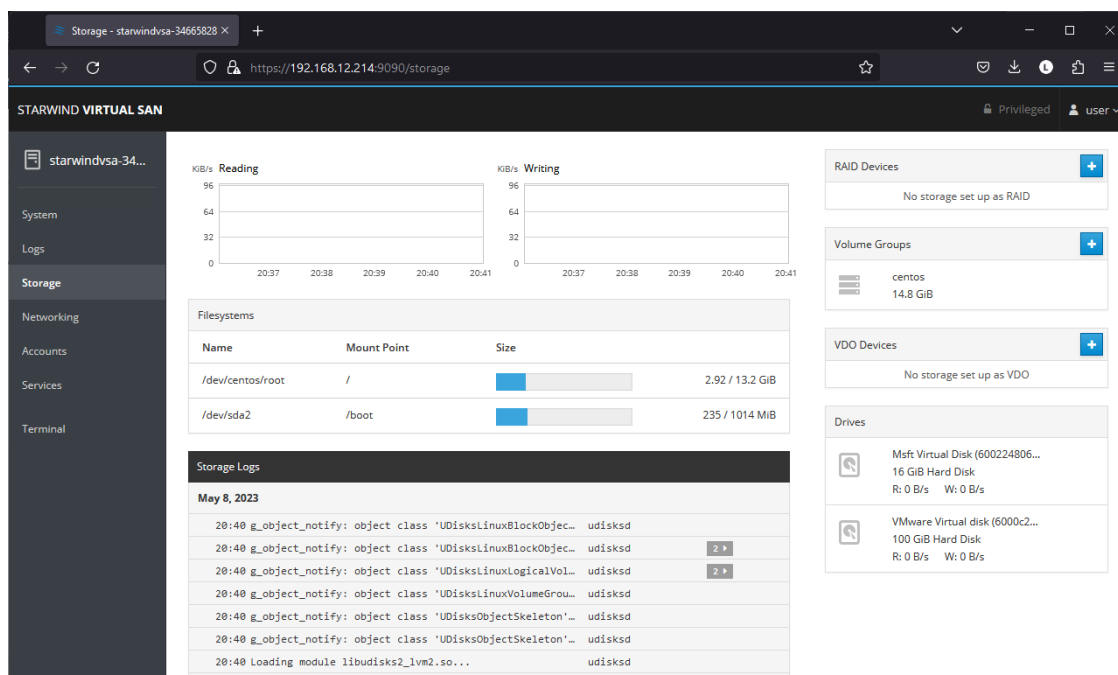


3. The added disk does not have any partitions and filesystem. Press the Create Partition Table button to create the partition.

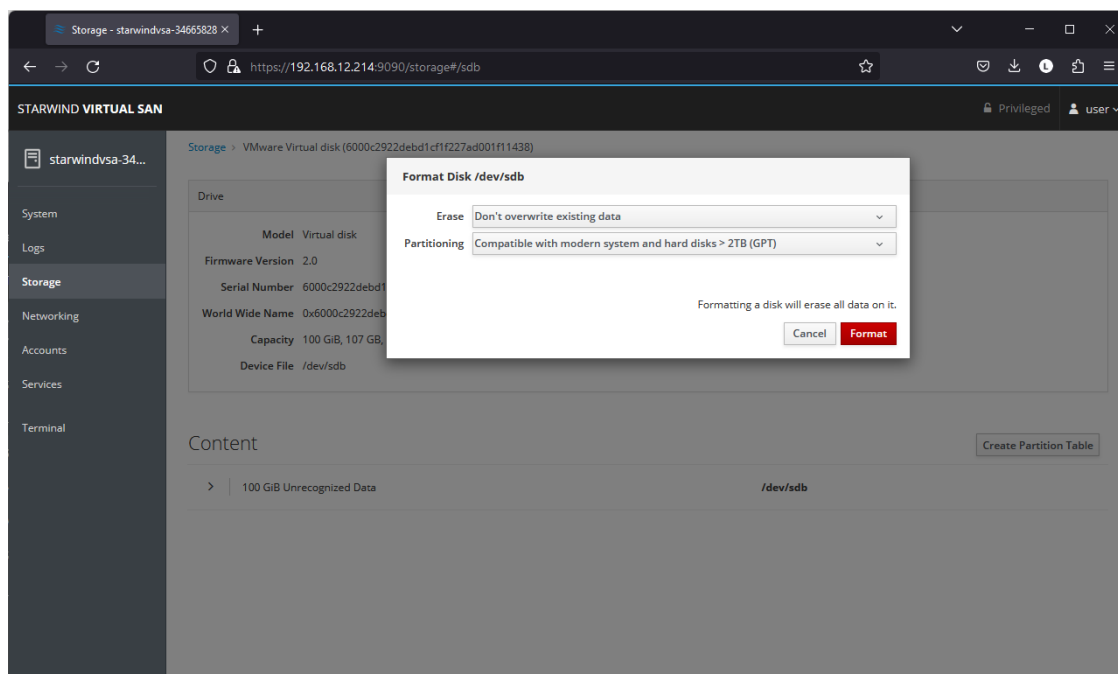

4. Press Create Partition to format the disk and set the mount point. The mount point should be as follows: /mnt/%yourdiskname%

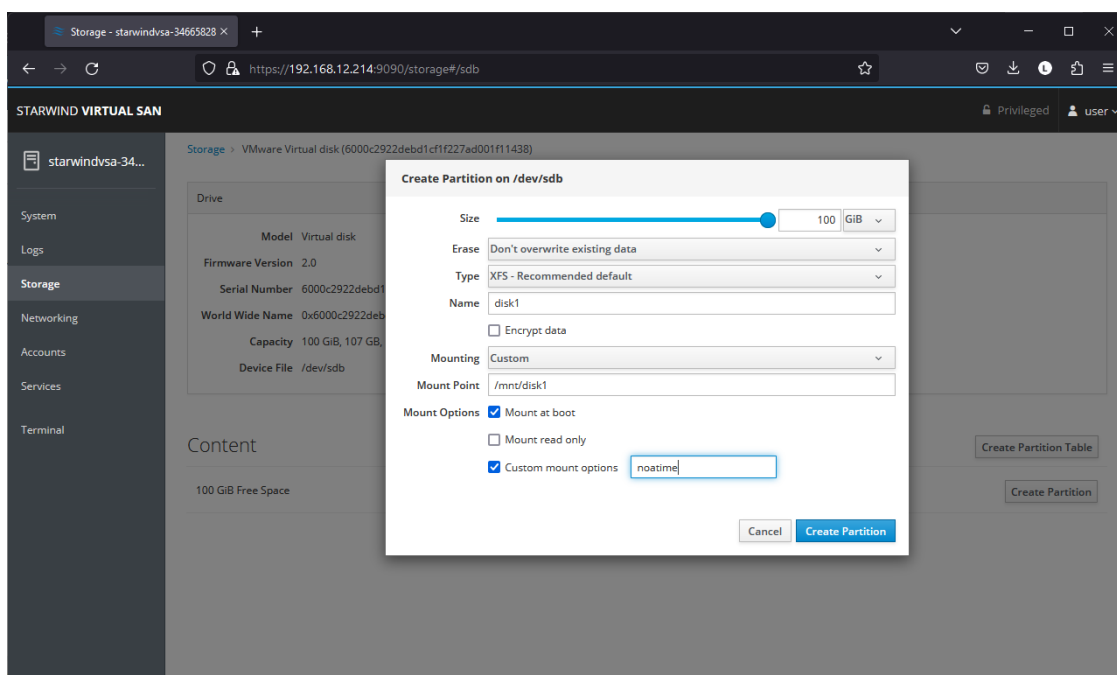

5. On the Storage section, under Content, navigate to the Filesystem tab. Click Mount.

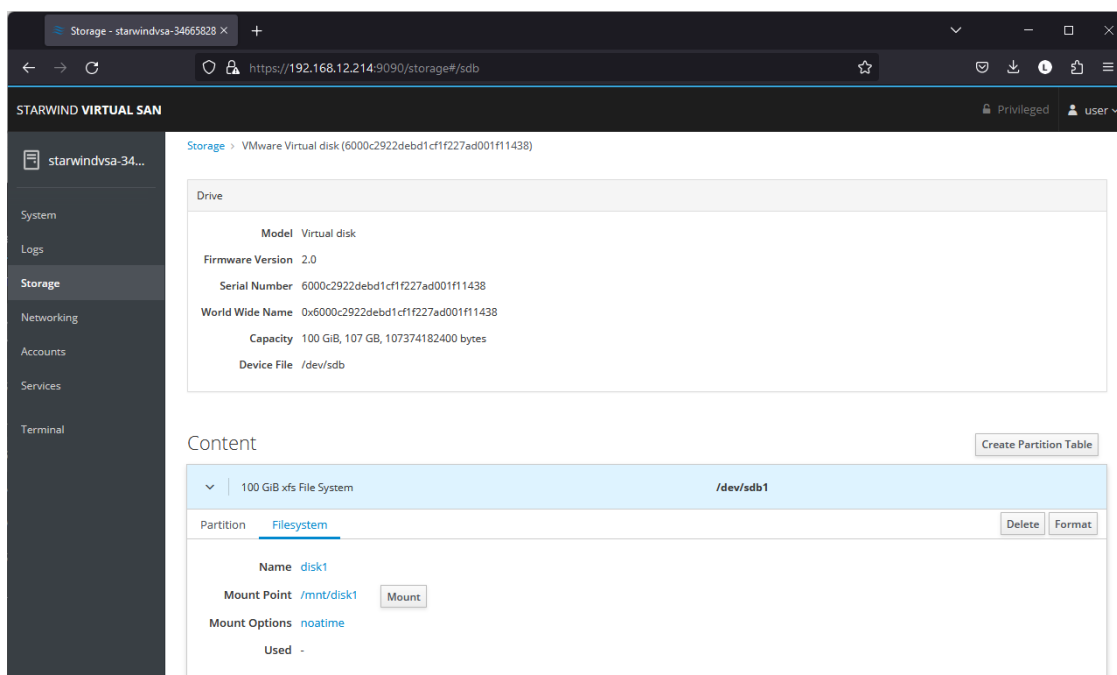

## Configuring Starwind Management Console


1. Install StarWind Management Console on each server or on a separate workstation with Windows OS (Windows 7 or higher, Windows Server 2008 R2 and higher) using the installer available here.

NOTE: StarWind Management Console and PowerShell Management Library components are required.


2. Select the appropriate option to apply the StarWind License key.

Once the appropriate license key has been received, it should be applied to StarWind Virtual SAN service via Management Console or PowerShell.

3. Open StarWind Management Console and click Add Server.

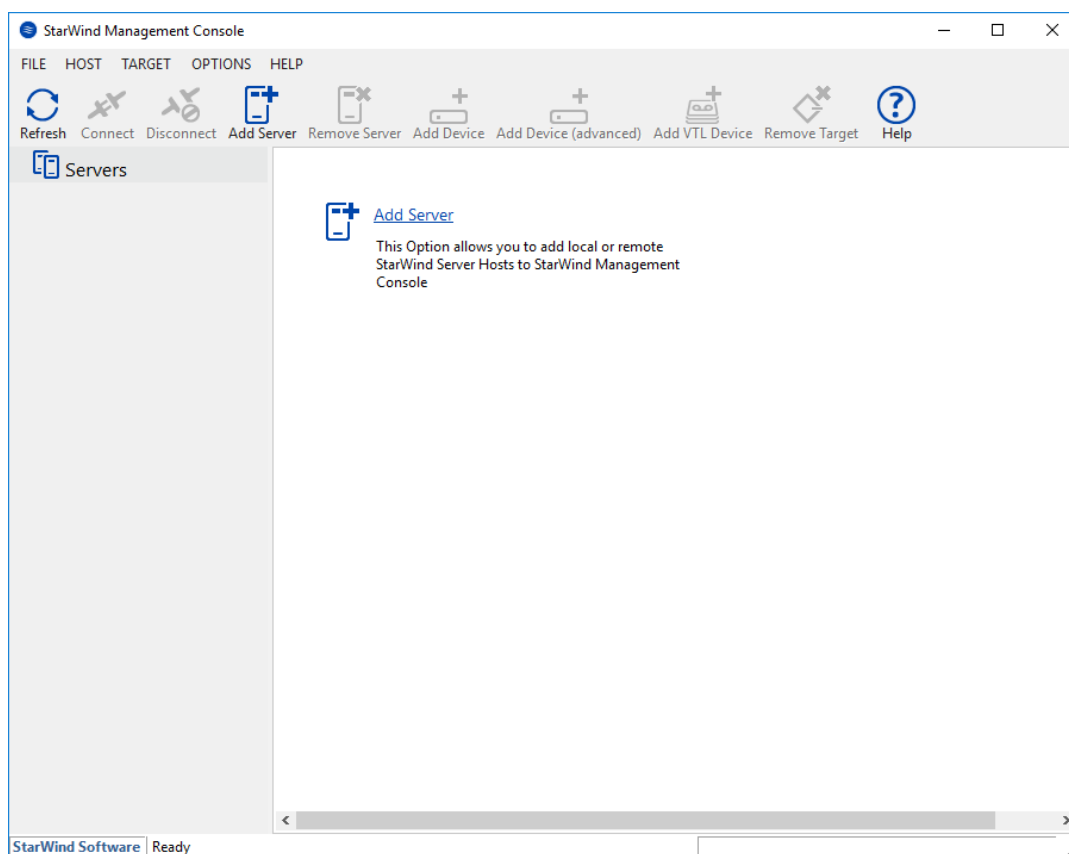


4. Type the IP address of the StarWind Virtual SAN in the pop-up window and click OK.

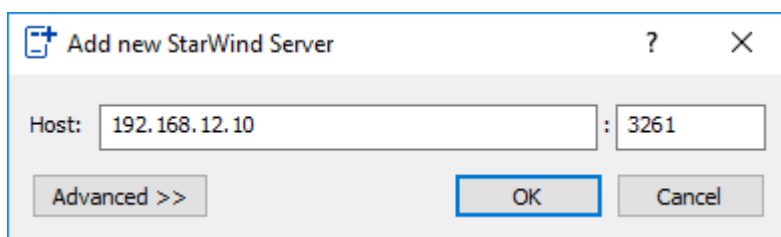

5. Select the server and click Connect.

6. Click Apply Key... on the pop-up window.

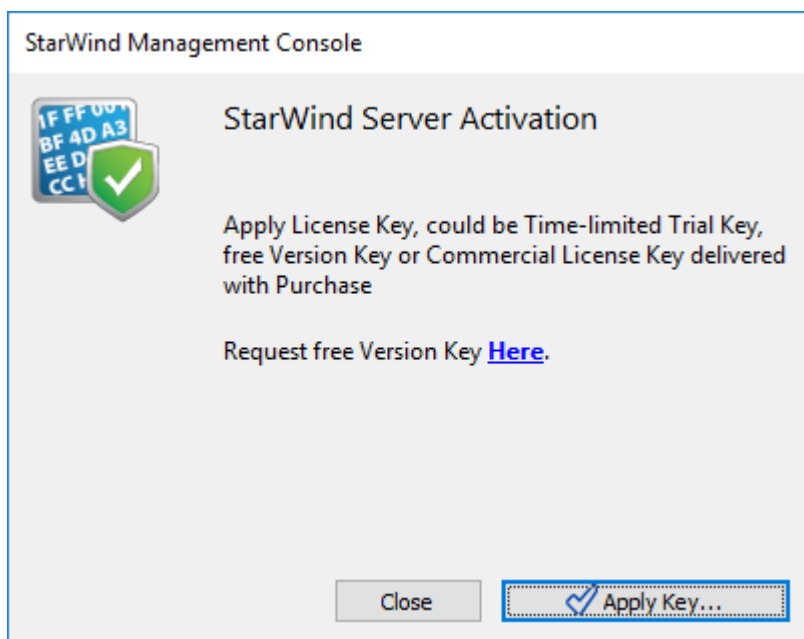

7. Select Load license from file and click the Load button.

8. Select the appropriate license key.


As an alternative, PowerShell can be used. Open StarWind InstallLicense.ps1 script with PowerShell ISE as administrator. It can be found here:

C:\Program Files\StarWind

Software\StarWind\StarWindX\Samples\powershell\InstallLicense.ps1

Type the IP address of StarWind Virtual SAN VM and credentials of StarWind Virtual SAN service (defaults login: root, password: starwind).

Add the path to the license key.

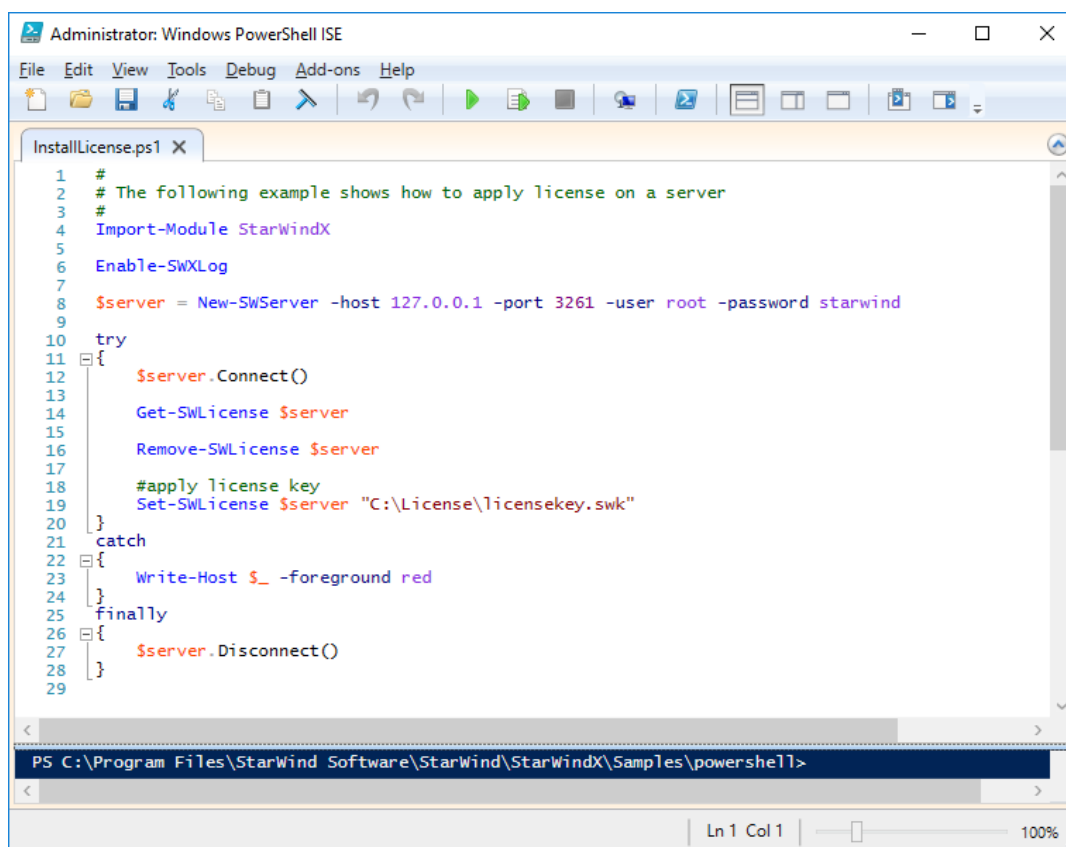

```


Administrator: Windows PowerShell ISE
File Edit View Tools Debug Add-ons Help
InstallLicense.ps1 X
1 #
2 # The following example shows how to apply license on a server
3 #
4 Import-Module StarWindX
5
6 Enable-SWXLog
7
8 $server = New-SWServer -host 127.0.0.1 -port 3261 -user root -password starwind
9
10 try
11 {
12     $server.Connect()
13
14     Get-SWLicense $server
15
16     Remove-SWLicense $server
17
18     #apply license key
19     Set-SWLicense $server "C:\License\licensekey.swk"
20 }
21 catch
22 {
23     Write-Host $_ -foreground red
24 }
25 finally
26 {
27     $server.Disconnect()
28 }
29
PS C:\Program Files\StarWind Software\StarWind\StarWindX\Samples\powershell>
Ln 1 Col 1 100%

```

9. After the license key is applied, StarWind devices can be created.  
NOTE: In order to manage StarWind Virtual SAN service (e.g. create ImageFile devices, VTL devices, etc.), StarWind Management Console can be used.


## Creating Starwind Devices

1. In the StarWind Management Console click to Add Device (advanced) button and open Add Device (advanced) Wizard.
2. Select Hard Disk Device as the type of device to be created.

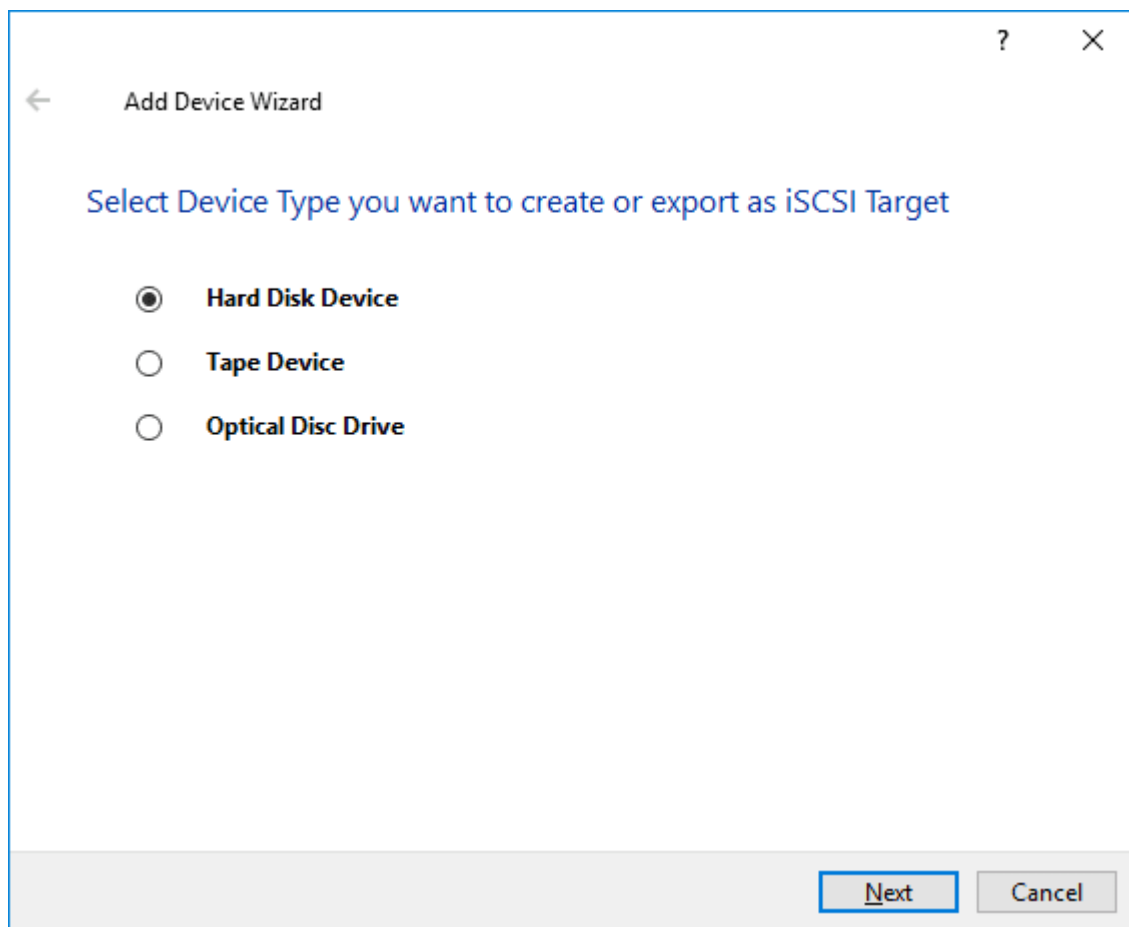

3. Select Virtual Disk.



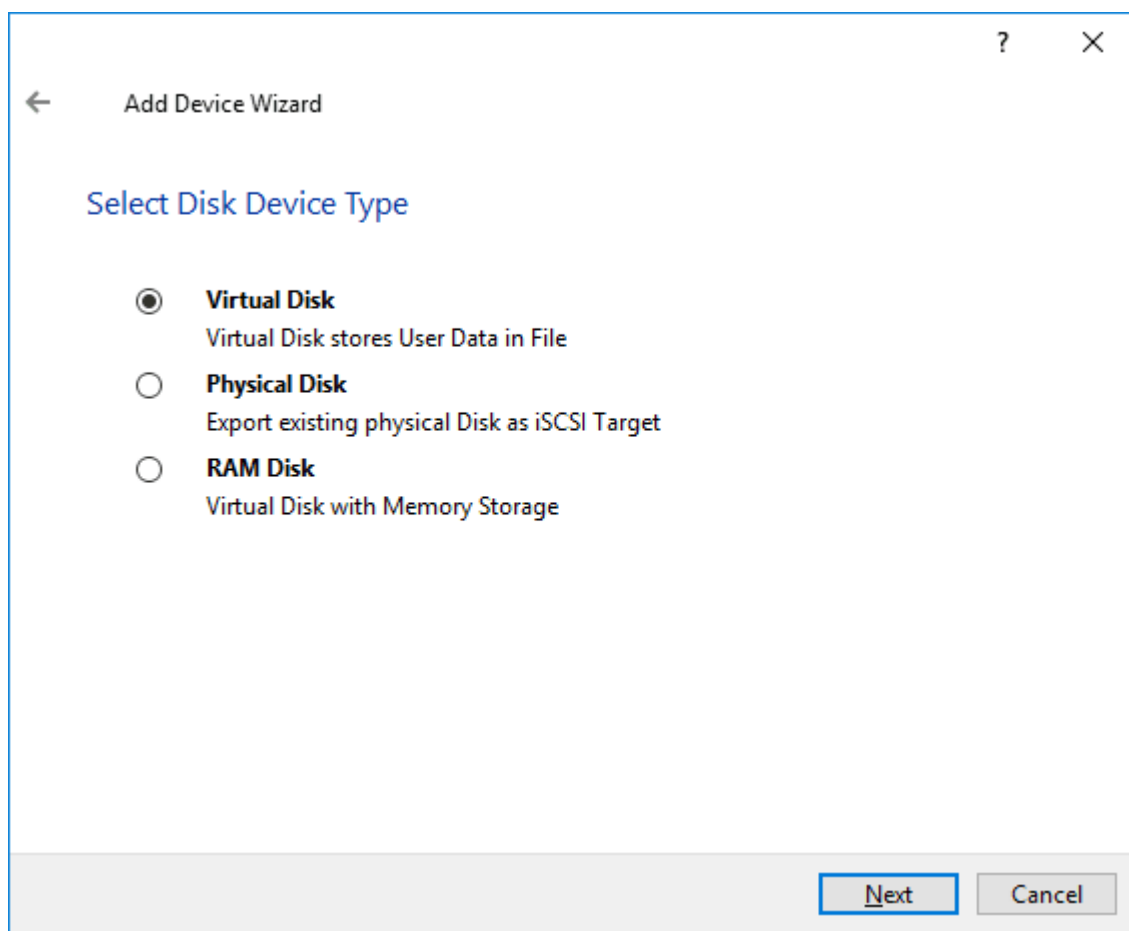

4. Specify a virtual disk Name, Location, and Size.

← Add Device Wizard

Virtual Disk Location

☒ Create a New Virtual Disk

Name: <device name>

Location: My Computer\D\

Size: <size> GB

☐ Use an Existing Virtual Disk

Location:

☐ Read-Only Mode

Next Cancel

5. Select the Thick provisioned disk type and block size.

NOTE: Use 4096 sector size for targets, connected on Windows-based systems and 512 bytes sector size for targets, connected on Linux-based systems (ESXi/Xen/KVM).

6. Define a caching policy and specify a cache size (in MB). Also, the maximum available cache size can be specified by selecting the appropriate checkbox. Optionally, define the L2 caching policy and cache size.

The screenshot shows a window titled "Add Device Wizard" with a back arrow and help/close icons. The main heading is "Specify Device RAM Cache Parameters". Below this, there is a "Mode" section with three radio button options:

- ☐ **Write-Back**  
Writes are performed asynchronously, actual Writes to Disk are delayed, Reads are cached
- ☐ **Write-Through**  
Writes are performed synchronously, Reads are cached
- ☒ **N/A**  
Reads and Writes are not cached

Below the radio buttons is a checkbox labeled "Set Maximum available Size" which is currently unchecked. Underneath this is a "Size:" label followed by a text input field containing "128" and a dropdown menu currently set to "MB". At the bottom right of the dialog are two buttons: "Next" (highlighted with a blue border) and "Cancel".


7. Specify Target Parameters. Select the Target Name checkbox to enter a custom target name. Otherwise, the name is generated automatically in accordance with the specified target alias.

The screenshot shows a window titled "Add Device Wizard" with a back arrow, a help icon (?), and a close icon (X). The main heading is "Target Parameters". Below this, there are several fields and checkboxes:

- Choose a Target Attachment Method:** A dropdown menu with "Create new Target" selected.
- Target Alias:** A text input field containing the placeholder "<target alias name>".
- Target Name:** A checkbox that is currently unchecked. Below it is a text input field containing the placeholder "iqn.2008-08.com.starwindsoftware:sw1-<target alias name>".
- Allow multiple concurrent iSCSI Connections:** A checkbox that is currently checked.

At the bottom right of the dialog, there are two buttons: "Next" (highlighted with a blue border) and "Cancel".

8. Click Create to add a new device and attach it to the target.

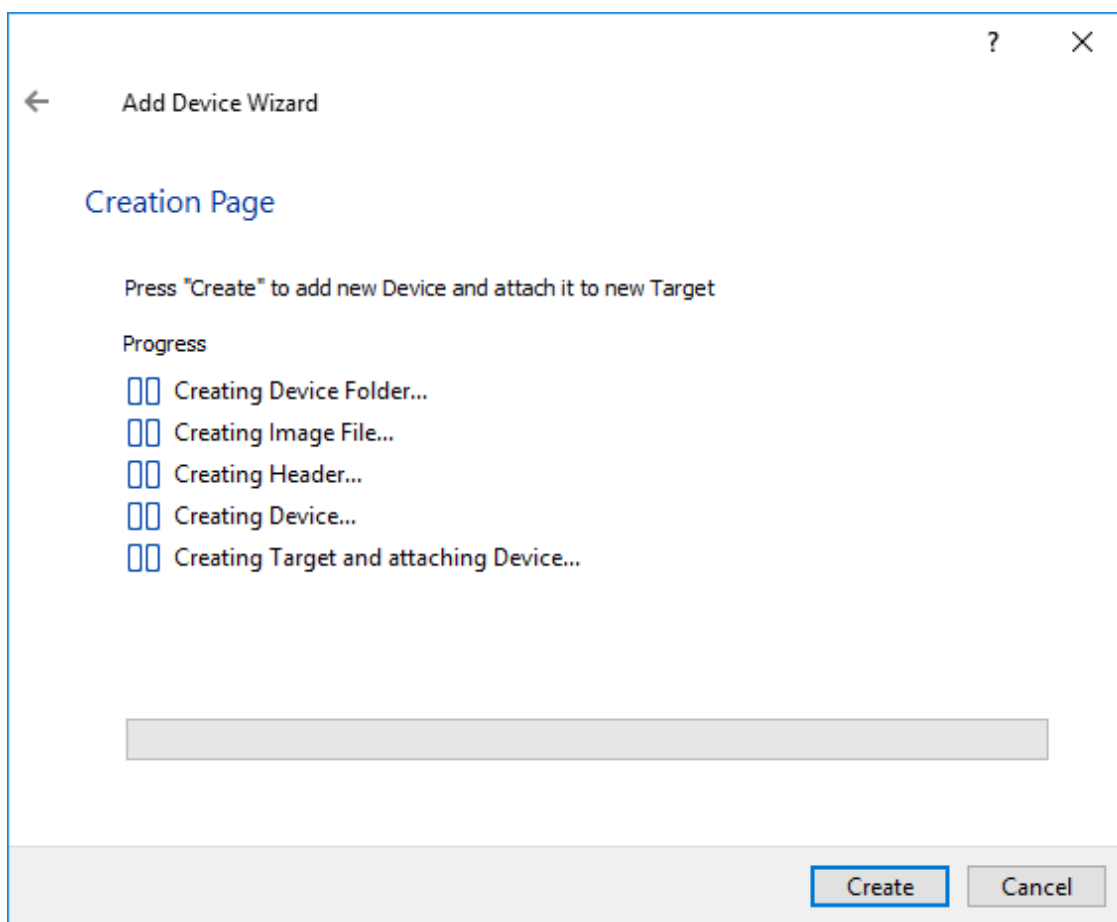

9. Click Close to finish the device creation.


10. The successfully added devices appear in the StarWind Management Console.

## Select The Required Replication Mode


The replication can be configured using Synchronous “Two-Way” Replication mode: Synchronous or active-active replication ensures real-time synchronization and load balancing of data between two or three cluster nodes. Such a configuration tolerates the failure of two out of three storage nodes and enables the creation of an effective business continuity plan. With synchronous mirroring, each write operation requires control confirmation from both storage nodes. It guarantees the reliability of data transfers but is demanding in bandwidth since mirroring will not work on high-latency networks.

## Synchronous “Two-Way” Replication

1. Right-click the recently created device and select Replication Manager from the shortcut menu.
2. Select the Add Replica button in the top menu.

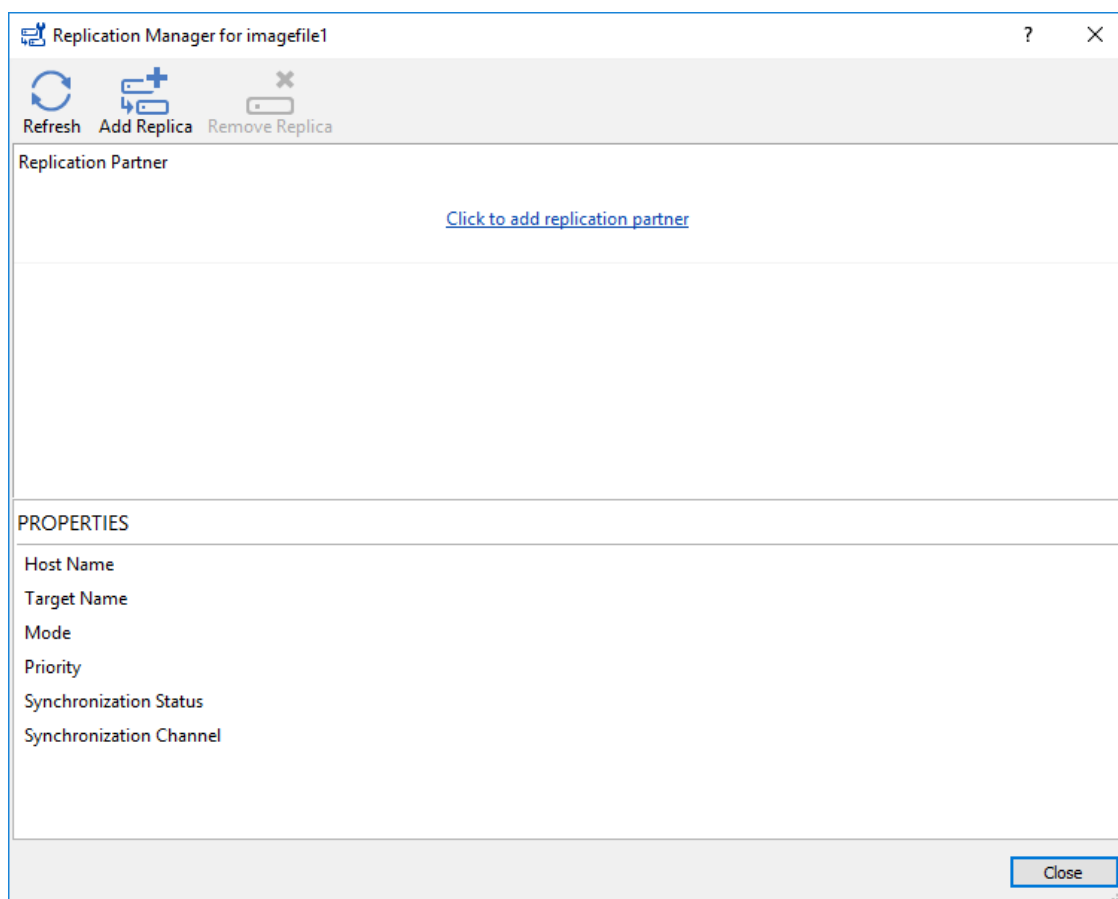

3. Select Synchronous “Two-Way” replication as a replication mode.

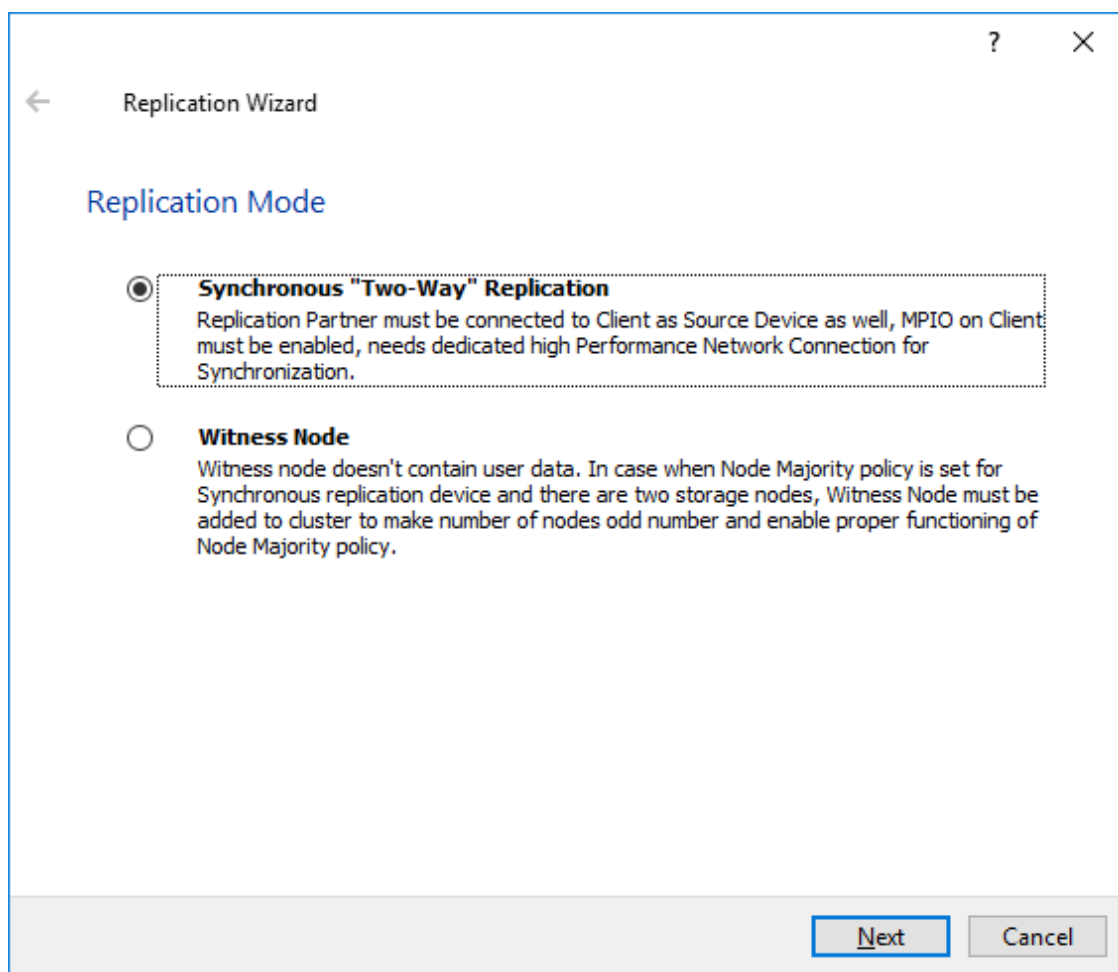

4. Specify a partner Host name or IP address and Port Number.

## Selecting The Failover Strategy

StarWind provides 2 options for configuring a failover strategy:

### Heartbeat

The Heartbeat failover strategy allows avoiding the “split-brain” scenario when the HA cluster nodes are unable to synchronize but continue to accept write commands from the initiators independently. It can occur when all synchronization and heartbeat channels disconnect simultaneously, and the partner nodes do not respond to the node’s requests. As a result, StarWind service assumes the partner nodes to be offline and continues operations on a single-node mode using data written to it.

If at least one heartbeat link is online, StarWind services can communicate with each other via this link. The device with the lowest priority will be marked as not synchronized and get subsequently blocked for the further read and write operations until the synchronization channel resumption. At the same time, the partner device on the

synchronized node flushes data from the cache to the disk to preserve data integrity in case the node goes down unexpectedly. It is recommended to assign more independent heartbeat channels during the replica creation to improve system stability and avoid the “split-brain” issue.

With the heartbeat failover strategy, the storage cluster will continue working with only one StarWind node available.

### Node Majority

The Node Majority failover strategy ensures the synchronization connection without any additional heartbeat links. The failure-handling process occurs when the node has detected the absence of the connection with the partner.

The main requirement for keeping the node operational is an active connection with more than half of the HA device’s nodes. Calculation of the available partners is based on their “votes”.

In case of a two-node HA storage, all nodes will be disconnected if there is a problem on the node itself, or in communication between them. Therefore, the Node Majority failover strategy requires the addition of the third Witness node or file share (SMB) which participates in the nodes count for the majority, but neither contains data on it nor is involved in processing clients’ requests. In case an HA device is replicated between 3 nodes, no Witness node is required.


With Node Majority failover strategy, failure of only one node can be tolerated. If two nodes fail, the third node will also become unavailable to clients’ requests.

Please select the required option:

## Heartbeat

1. Select Failover Strategy.



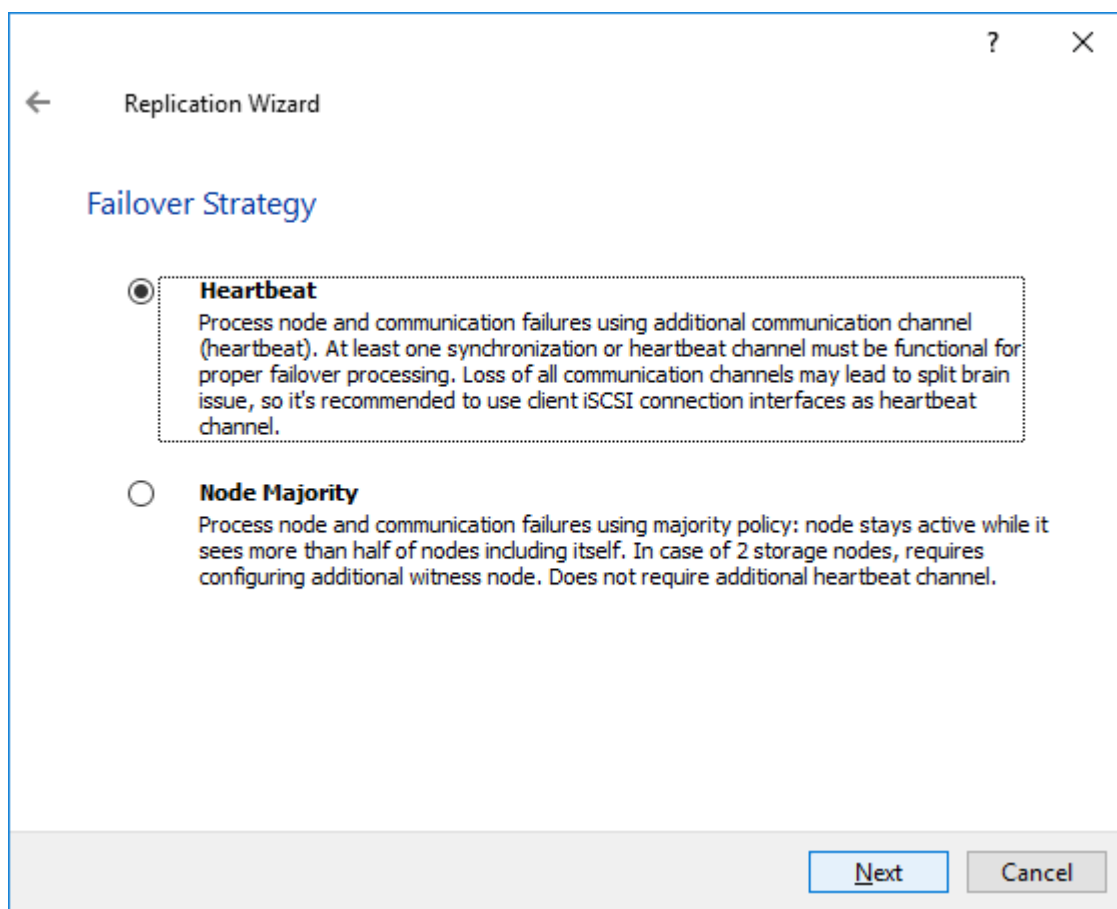

2. Select Create new Partner Device and click Next.

3. Select a partner device Location and click Next.

4. Select Synchronization Journal Strategy and click Next.

NOTE: There are several options – RAM-based journal (default) and Disk-based journal with failure and continuous strategy, that allow to avoid full synchronization cases.

RAM-based (default) synchronization journal is placed in RAM. Synchronization with RAM journal provides good I/O performance in any scenario. Full synchronization could occur in the cases described in this KB:

<https://knowledgebase.starwindsoftware.com/explanation/reasons-why-full-synchronization-may-start/>

Disk-based journal placed on a separate disk from StarWind devices. It allows to avoid full synchronization for the devices where it's configured even when StarWind service is being stopped on all nodes.

Disk-based synchronization journal should be placed on a separate, preferably faster disk from StarWind devices. SSDs and NVMe disks are recommended as the device

performance is defined by the disk speed, where the journal is located. For example, it can be placed on the OS boot volume.

It is required to allocate 2 MB of disk space for the synchronization journal per 1 TB of HA device size with a disk-based journal configured and 2-way replication and 4MB per 1 TB of HA device size for 3-way replication.

Failure journal – provides good I/O performance, as a RAM-based journal, while all device nodes are in a healthy synchronized state. If a device on one node went into a not synchronized state, the disk-based journal activates and a performance drop could occur as the device performance is defined by the disk speed, where the journal is located. Fast synchronization is not guaranteed in all cases. For example, if a simultaneous hard reset of all nodes occurs, full synchronization will occur.

Continuous journal – guarantees fast synchronization and data consistency in all cases. Although, this strategy has the worst I/O performance, because of frequent write operations to the journal, located on the disk, where the journal is located.

The screenshot shows a window titled "Replication Wizard" with a "Synchronization Journal Setup" section. It contains four radio button options: "RAM-based journal" (selected), "Disk-based journal", "Failure journal", and "Continuous journal". Each option has a descriptive text. Below the options are two text input fields labeled "Current Node" and "Partner Node", both containing "My Computer\C\". At the bottom right are "Next" and "Cancel" buttons.

Replication Wizard

**Synchronization Journal Setup**


- ☒ **RAM-based journal**  
Synchronization journal placed in RAM. Synchronization with RAM journal provides good IO performance in any scenario.
- ☐ **Disk-based journal**  
Synchronization journal placed on disk.
- ☐ **Failure journal**  
The strategy provides good IO performance while all device nodes are in a healthy state.
- ☐ **Continuous journal**  
The strategy guarantees fast synchronization and data consistency in all cases.

Current Node:  ...

Partner Node:  ...

**Next** **Cancel**

5. Click Change Network Settings.

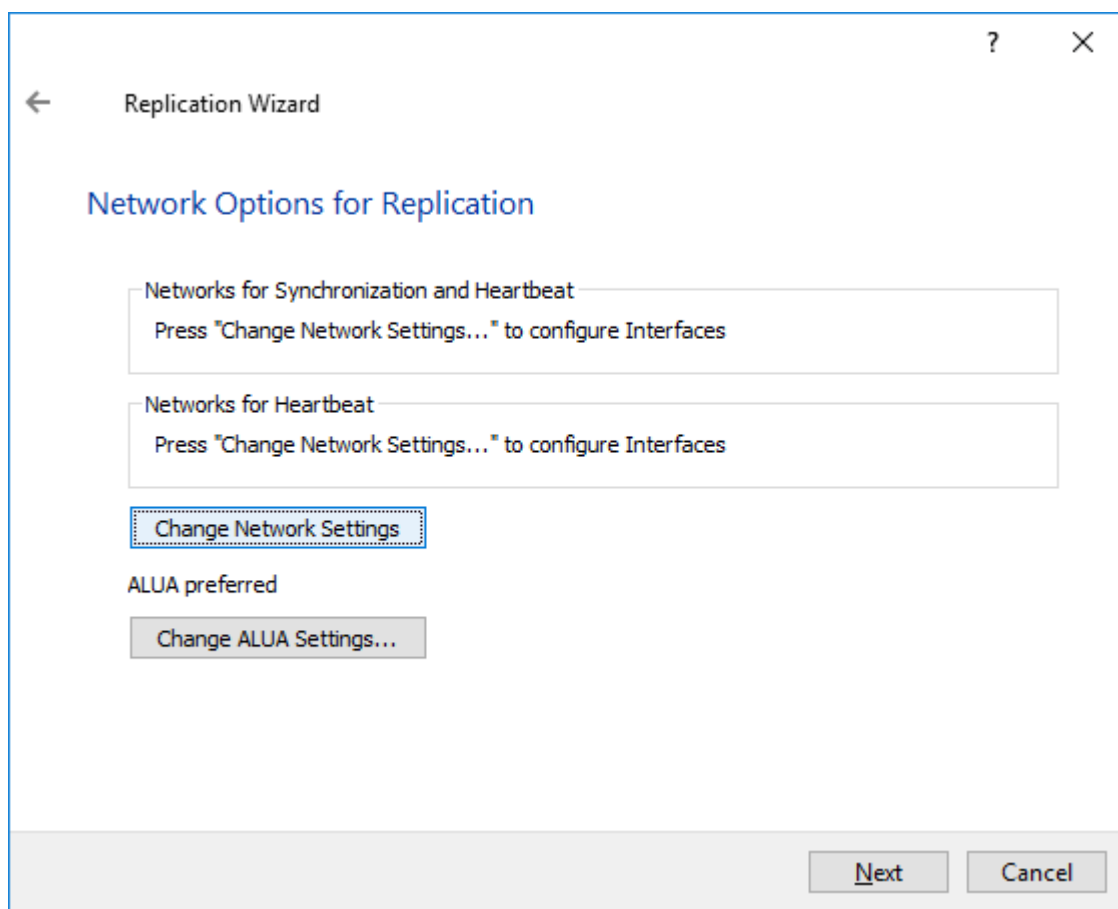

6. Specify the interfaces for Synchronization and Heartbeat Channels. Click OK and then click Next.

Specify Interfaces for Synchronization Channels

Select synchronization channel

Interfaces	Networks	Synchronization and H...	Heartbeat
<b>Host Name: 127.0.0.1</b>			
172.16.10.10	172.16.10.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
172.16.20.10	172.16.20.0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
192.168.12.10	192.168.12.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<b>Host Name: SW2</b>			
172.16.10.20	172.16.10.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
172.16.20.20	172.16.20.0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
192.168.12.20	192.168.12.0	<input type="checkbox"/>	<input checked="" type="checkbox"/>

☐ Allow Free Select Interfaces

OK Cancel

7. In Select Partner Device Initialization Mode, select Synchronize from existing Device and click Next.

8. Click Create Replica. Click Finish to close the wizard.

The successfully added device appears in StarWind Management Console.

9. Follow the same procedure for the creation of other virtual disks that will be used as storage repositories.

## Node Majority

There are two ways to configure Witness for 2-nodes StarWind HA device, created with Node Majority Failover Strategy: File Share (SMB) as Witness and additional server as Witness Node.

– Creating HA device with File SHare(SMB) as Witness:


SMB Witness is a file, located on SMB share, which can be accessed by both nodes and help them to eliminate the split-brain issue in case of synchronization connection

interruption between the nodes. To set up the SMB file share as a Witness for 2-nodes HA device with Node Majority Failover Strategy, perform the actions, described on this page:

<https://www.starwindsoftware.com/help/ConfiguringFileShareSMBasWitness.html>

– Creating HA device with Witness Node:

1. Select the Node Majority failover strategy and click Next.

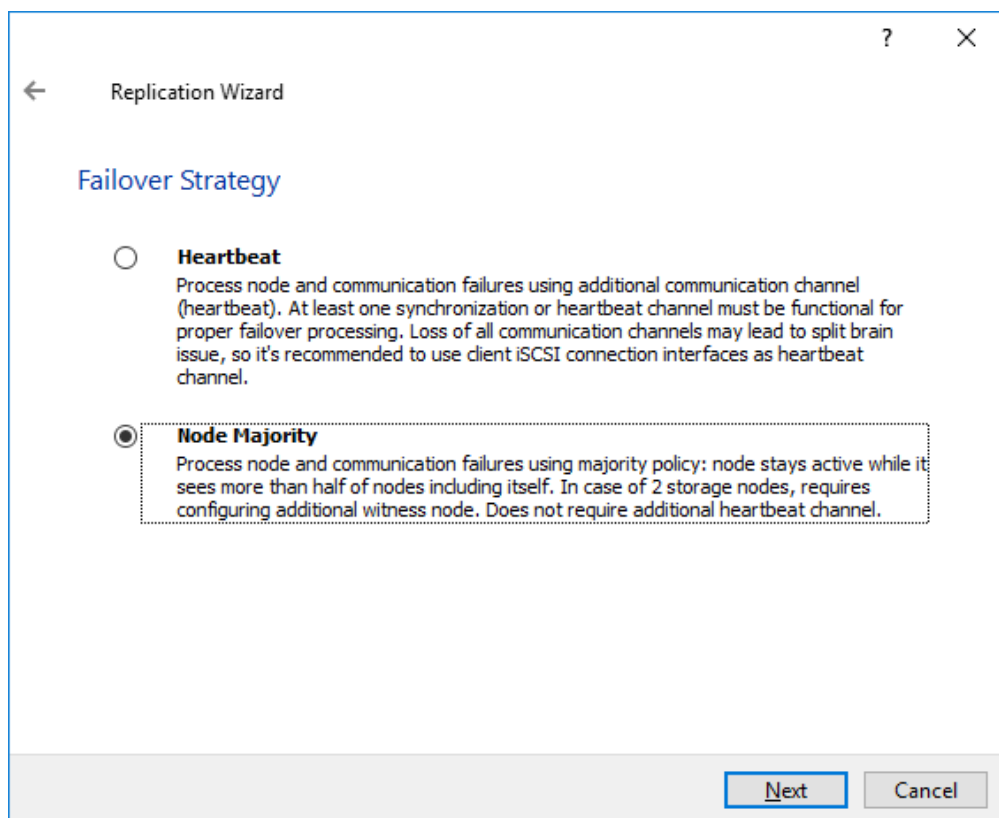

2. Choose Create new Partner Device and click Next.

3. Specify the partner device Location and modify the target name if necessary. Click Next. Select Synchronization Journal strategy and location and click Next.

4. In Network Options for Replication, press the Change network settings button and select the synchronization channel for the HA device.

5. In Specify Interfaces for Synchronization Channels, select the checkboxes with the appropriate networks and click OK. Then click Next.

6. Select Synchronize from existing Device as the partner device initialization mode.


7. Press the Create Replica button and close the wizard.
8. The added devices will appear in StarWind Management Console. Repeat the steps above to create other virtual disks if necessary.

## Adding Witness Node


Witness node can be configured on a separate host or as a virtual machine in a cloud. It requires StarWind Virtual SAN service installed on it.

NOTE: Since the device created in this guide is replicated between 2 active nodes with the Node Majority failover strategy, a Witness node must be added to it.

1. Open StarWind Management Console, right-click on the Servers field and press the Add Server button. Add a new StarWind Server which will be used as the Witness node and click OK.

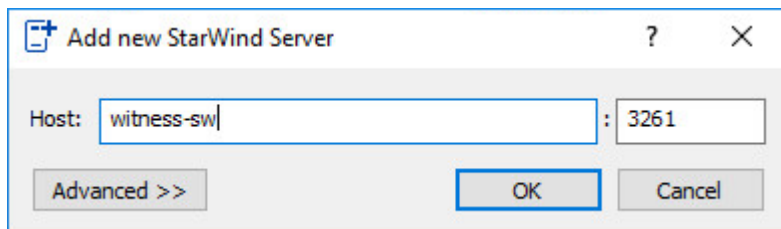

2. Right-click on the HA device with the configured Node Majority failover policy and select Replication Manager and press the Add Replica button.
3. Select Witness Node.

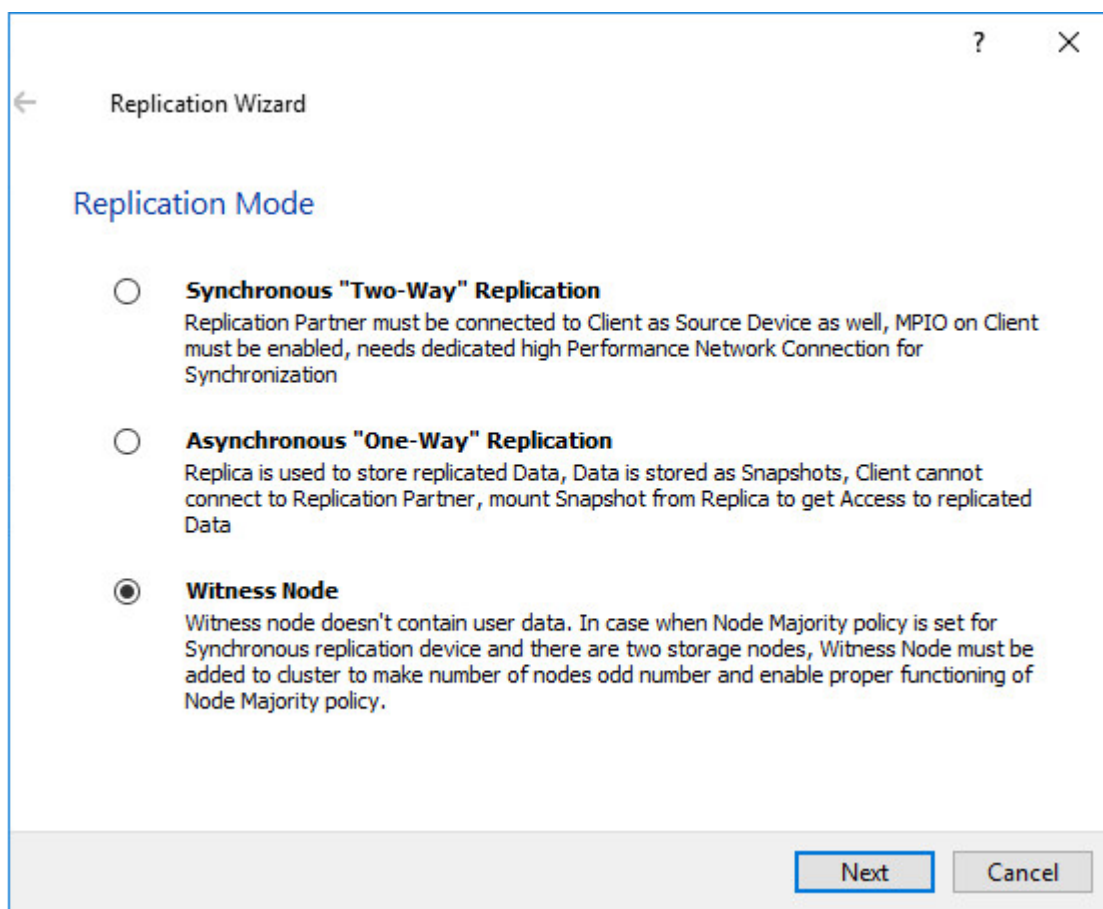

4. Specify the Witness node Host Name or IP address. The default Port Number is 3261.

Replication Wizard

Add Partner Node

Specify Partner Host Name or IP Address where Replication Node would be created

Host Name or IP Address

Port Number

Next Cancel

5. In Partner Device Setup, specify the Witness device Location. Optionally, modify the target name by clicking the appropriate button.

6. In Network Options for Replication, select the synchronization channel with the Witness node by clicking the Change Network Settings button.

7. Specify the interface for Synchronization and Heartbeat and click OK.

8. Click Create Replica and then close the wizard.

9. Repeat the steps above to create other virtual disks if necessary.

NOTE: To extend an Image File or a StarWind HA device to the required size, please check the article below:

<https://knowledgebase.starwindsoftware.com/maintenance/how-to-extend-image-file-or-high-availability-device/>




## Provisioning Starwind Ha Storage To Windows Server Hosts


1. Launch Microsoft iSCSI Initiator: Start -> Windows Administrative Tools -> iSCSI Initiator. Alternatively, launch it using the command below in the command line interface:

```
iscsicpl
```

2. Navigate to the Discovery tab.

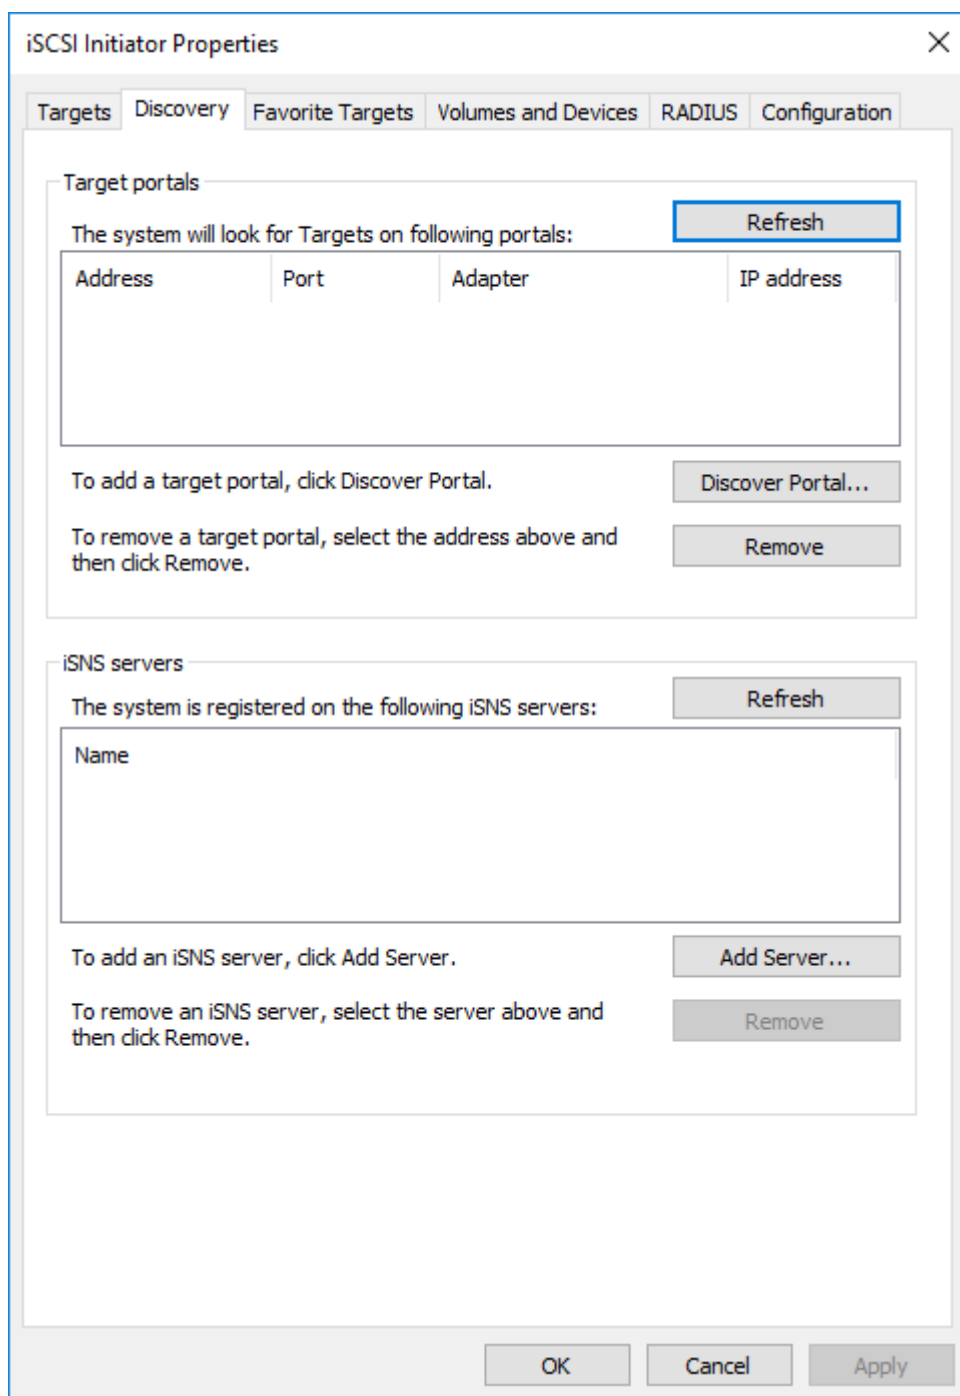

3. Click the Discover Portal button. The Discover Target Portal dialog appears. Type 172.16.10.10.

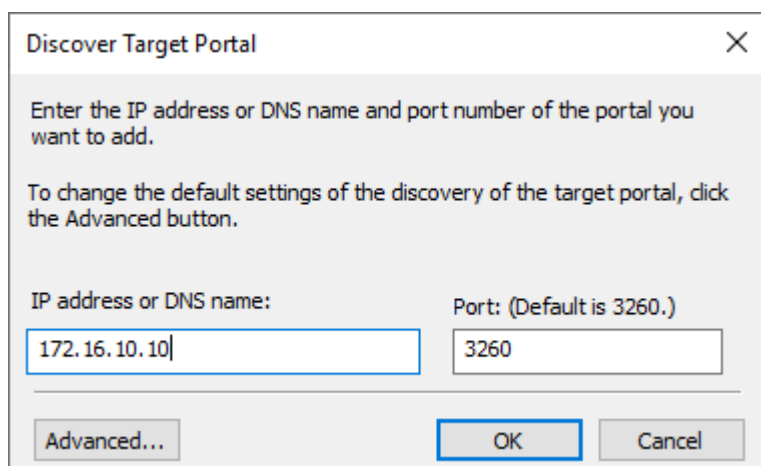


The image shows a 'Discover Target Portal' dialog box with a close button (X) in the top right corner. Inside the dialog, there is instructional text: 'Enter the IP address or DNS name and port number of the portal you want to add.' and 'To change the default settings of the discovery of the target portal, click the Advanced button.' Below this text are two input fields. The first field is labeled 'IP address or DNS name:' and contains the text '172.16.10.10'. The second field is labeled 'Port: (Default is 3260.)' and contains the text '3260'. At the bottom of the dialog, there are three buttons: 'Advanced...', 'OK', and 'Cancel'. The 'OK' button is highlighted with a blue border.

4. Click the Advanced button. Select Microsoft iSCSI Initiator as a Local adapter and select Initiator IP. Confirm the actions to complete the Target Portal discovery.

The screenshot shows the 'Advanced Settings' dialog box with the 'IPsec' tab selected. The 'Connect using' section has three dropdown menus: 'Local adapter' set to 'Microsoft iSCSI Initiator', 'Initiator IP' set to '172.16.10.1', and 'Target portal IP' is empty. The 'CRC / Checksum' section has two unchecked checkboxes: 'Data digest' and 'Header digest'. The 'Enable CHAP log on' checkbox is also unchecked. The 'CHAP Log on information' section contains a text box for 'Name' with the value 'iqn.1991-05.com.microsoft:sw01' and an empty 'Target secret' text box. Below this, there are three more unchecked checkboxes: 'Perform mutual authentication', 'Use RADIUS to generate user authentication credentials', and 'Use RADIUS to authenticate target credentials'. At the bottom right are 'OK', 'Cancel', and 'Apply' buttons.

5. Click the Discover Portal... button once again.

6. In Discover Target Portal dialog, type in the iSCSI interface IP address of the partner node that will be used to connect the StarWind provisioned targets. Click Advanced.

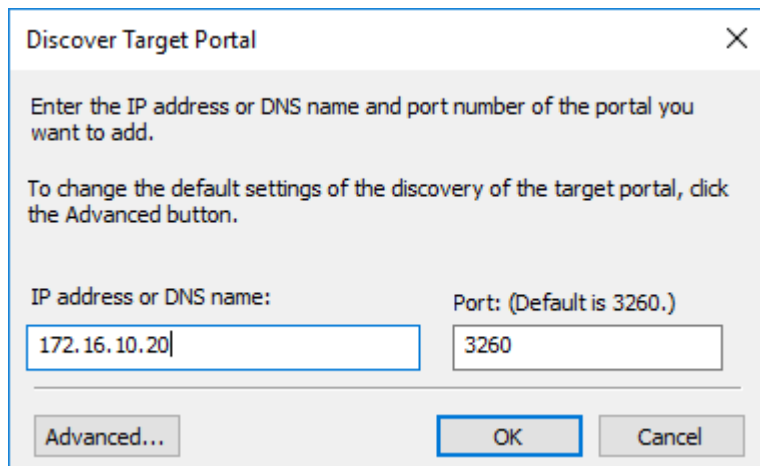


The image shows a 'Discover Target Portal' dialog box with a close button (X) in the top right corner. Inside the dialog, there is instructional text: 'Enter the IP address or DNS name and port number of the portal you want to add.' and 'To change the default settings of the discovery of the target portal, click the Advanced button.' Below this text are two input fields. The first field is labeled 'IP address or DNS name:' and contains the text '172.16.10.20'. The second field is labeled 'Port: (Default is 3260.)' and contains the text '3260'. At the bottom of the dialog, there are three buttons: 'Advanced...', 'OK', and 'Cancel'. The 'OK' button is highlighted with a blue border.

7. Select Microsoft iSCSI Initiator as the Local adapter, select the Initiator IP in the same subnet as the IP address of the partner server from the previous step. Confirm the actions to complete the Target Portal discovery.

The screenshot shows the 'Advanced Settings' dialog box with the 'IPsec' tab selected. The 'Connect using' section has three dropdown menus: 'Local adapter' set to 'Microsoft iSCSI Initiator', 'Initiator IP' set to '172.16.10.1', and 'Target portal IP' which is empty. Below this, the 'CRC / Checksum' section has two unchecked checkboxes: 'Data digest' and 'Header digest'. The 'Enable CHAP log on' checkbox is also unchecked. The 'CHAP Log on information' section contains a text box for 'Name' with the value 'iqn.1991-05.com.microsoft:sw01' and an empty 'Target secret' text box. Below this, there are three more unchecked checkboxes: 'Perform mutual authentication', 'Use RADIUS to generate user authentication credentials', and 'Use RADIUS to authenticate target credentials'. At the bottom right are 'OK', 'Cancel', and 'Apply' buttons.

8. Now, all the target portals are added on the first node.

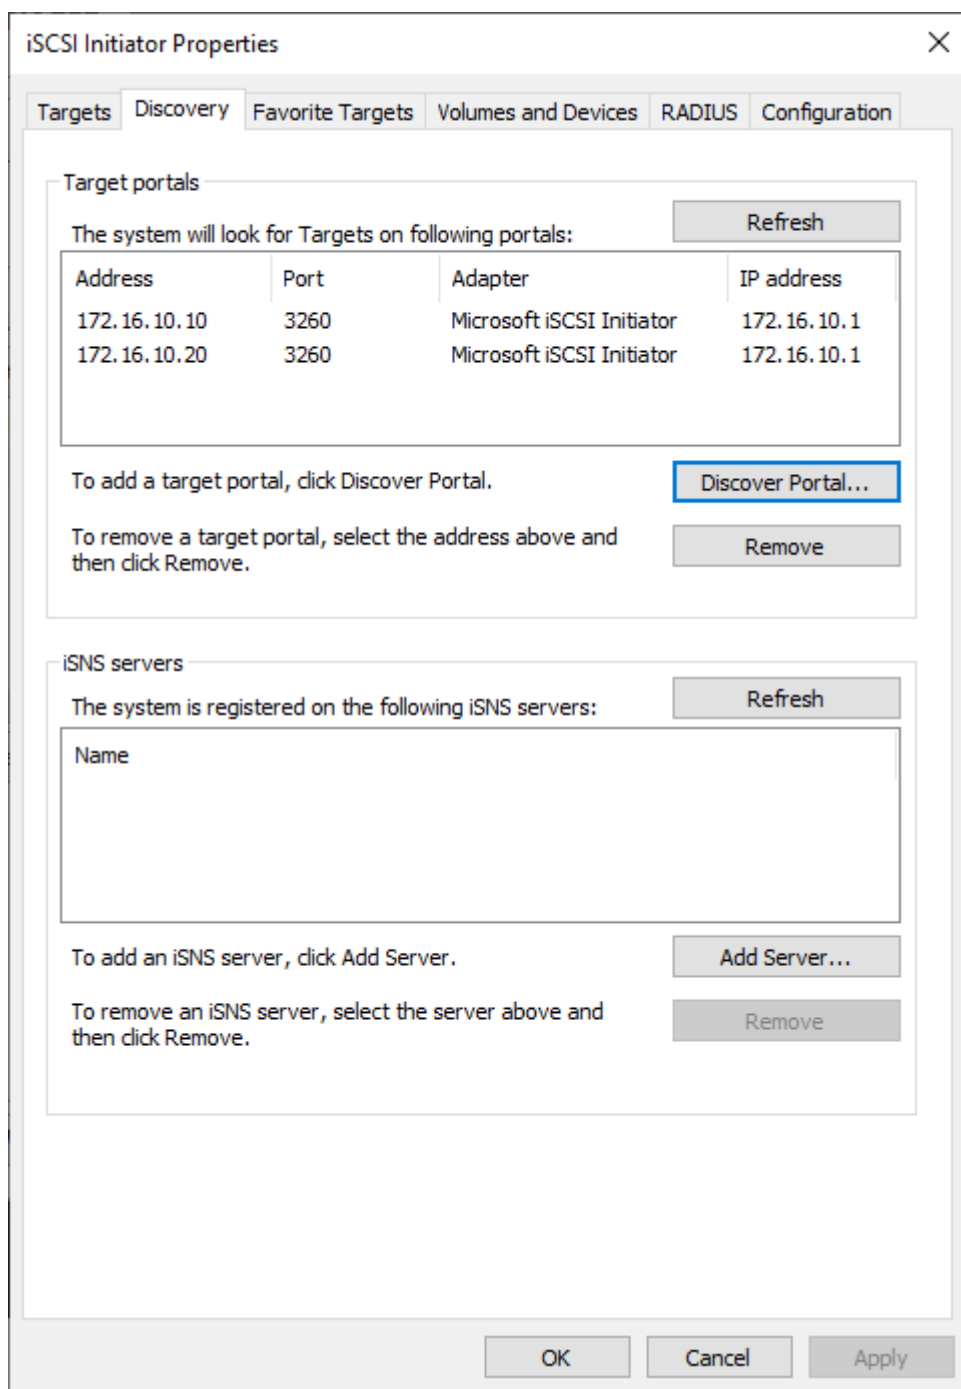


9. Repeat the steps 1-8 on the partner node.

### Connecting Targets

1. Click the Targets tab. The previously created targets are listed in the Discovered Targets section.


NOTE: If the created targets are not listed, check the firewall settings of the StarWind Server as well as the list of networks served by the StarWind Server (go to StarWind

Management Console -> Configuration -> Network). Alternatively, check the Access Rights tab on the corresponding StarWind VSAN server in StarWind Management Console for any restrictions.

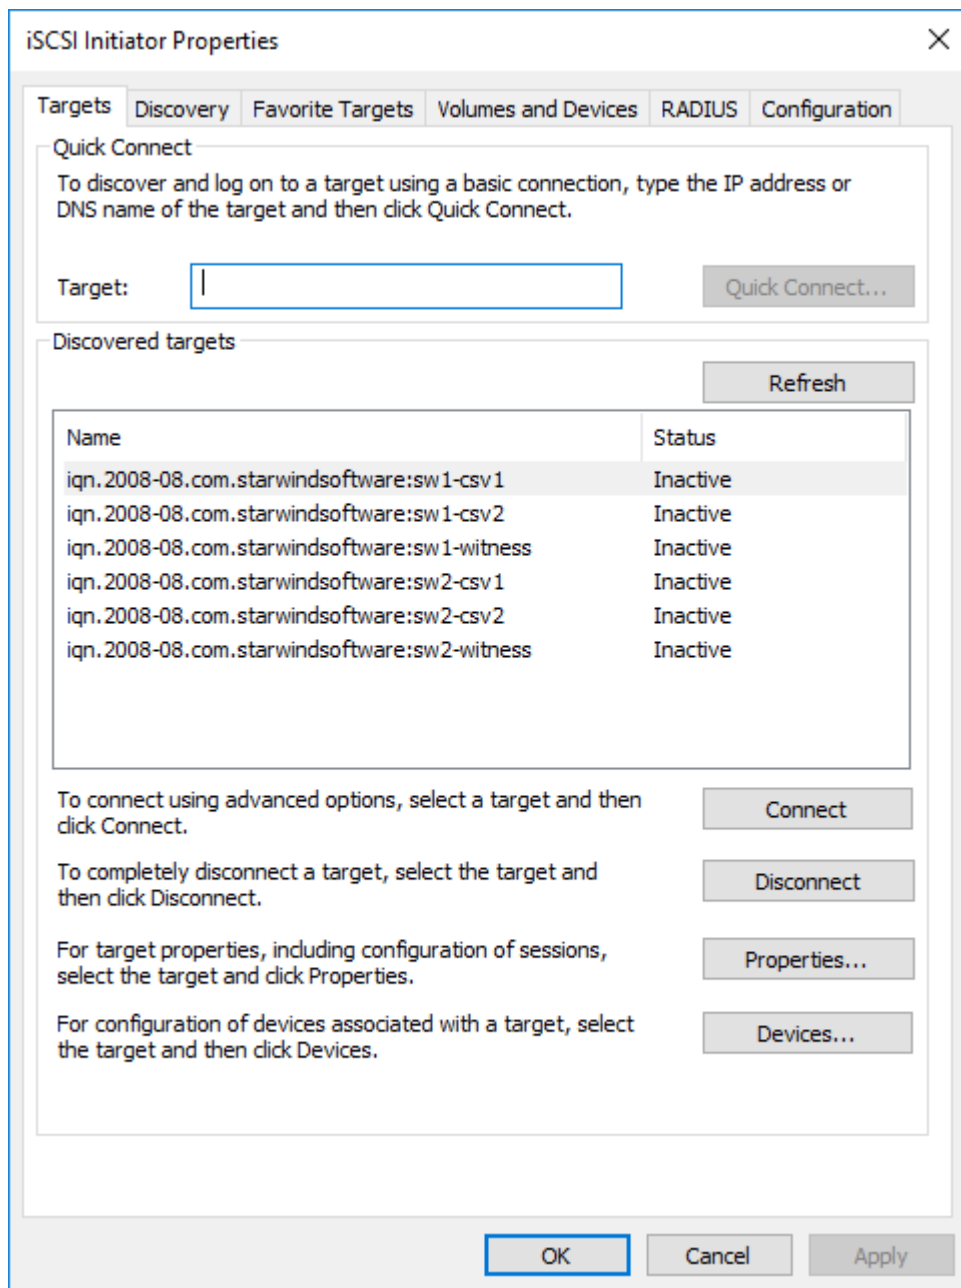

2. Select the Witness target from the local server and click Connect.
3. Enable checkboxes as shown in the image below. Click Advanced.




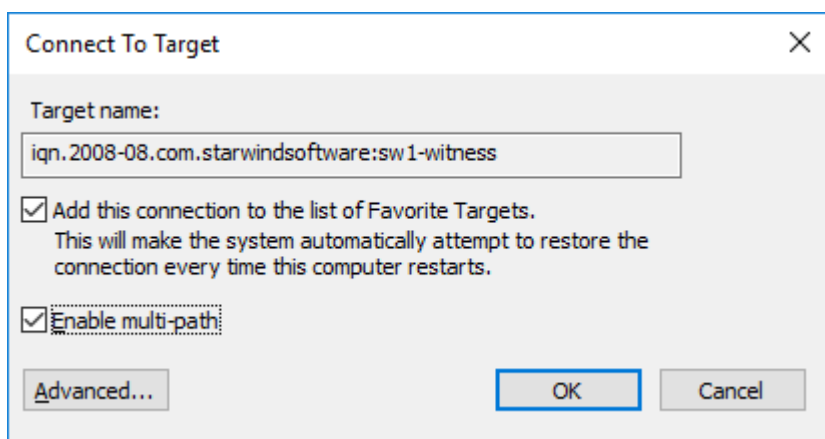

4. Select Microsoft iSCSI Initiator in the Local adapter dropdown menu. In the Initiator IP field, select the IP address for the iSCSI channel. In the Target portal IP, select the corresponding portal IP from the same subnet. Confirm the actions.

The screenshot shows the 'Advanced Settings' dialog box with the 'IPsec' tab selected. The 'Connect using' section has three dropdown menus: 'Local adapter' set to 'Microsoft iSCSI Initiator', 'Initiator IP' set to '172.16.10.1', and 'Target portal IP' set to '172.16.10.10 / 3260'. The 'CRC / Checksum' section has two unchecked checkboxes: 'Data digest' and 'Header digest'. The 'Enable CHAP log on' checkbox is also unchecked. The 'CHAP Log on information' section contains a text box for 'Name' with the value 'iqn.1991-05.com.microsoft:sw01' and an empty 'Target secret' text box. Below this, there are three more unchecked checkboxes: 'Perform mutual authentication', 'Use RADIUS to generate user authentication credentials', and 'Use RADIUS to authenticate target credentials'. At the bottom right are 'OK', 'Cancel', and 'Apply' buttons.

5. Repeat the steps 2-4 to connect to partner node.
6. Select the CSV1 target discovered from the local server and click Connect.
7. Enable checkboxes as shown in the image below. Click Advanced.

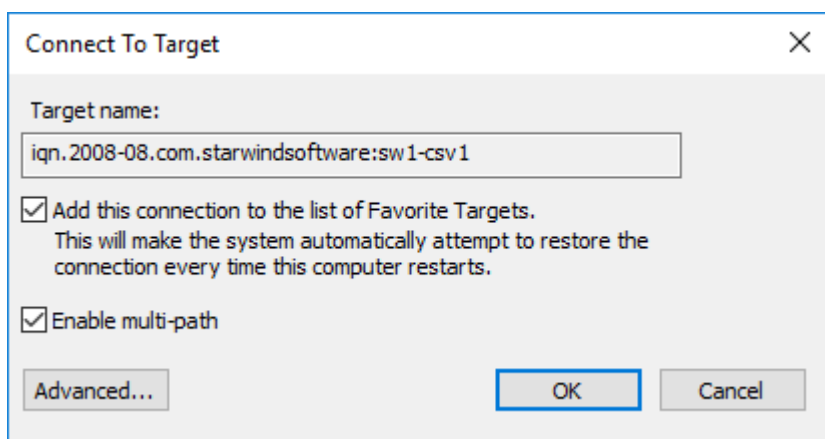

8. Select Microsoft iSCSI Initiator in the Local adapter dropdown menu. In Target portal IP, select 172.16.10.10. Confirm the actions.

9. Select the partner target from the other StarWind node and click Connect.

10. Repeat the step 6.

11. Select Microsoft iSCSI Initiator in the Local adapter dropdown menu. In the Initiator IP field, select the IP address for the iSCSI channel. In the Target portal IP, select the corresponding portal IP from the same subnet. Confirm the actions.

The screenshot shows the 'Advanced Settings' dialog box with the 'IPsec' tab selected. The 'Connect using' section has three dropdown menus: 'Local adapter' set to 'Microsoft iSCSI Initiator', 'Initiator IP' set to '172.16.10.1', and 'Target portal IP' set to '172.16.10.20 / 3260'. The 'CRC / Checksum' section has two unchecked checkboxes: 'Data digest' and 'Header digest'. The 'Enable CHAP log on' checkbox is also unchecked. The 'CHAP Log on information' section contains a text box for 'Name' with the value 'iqn.1991-05.com.microsoft:sw01' and an empty 'Target secret' text box. Below this, there are three more unchecked checkboxes: 'Perform mutual authentication', 'Use RADIUS to generate user authentication credentials', and 'Use RADIUS to authenticate target credentials'. At the bottom right are 'OK', 'Cancel', and 'Apply' buttons.

11. Repeat the steps 1-10 for all remaining HA device targets.


12. Repeat the steps 1-11 on the other StarWind node, specifying corresponding data channel IP addresses.

### Configuring Multipath

**NOTE:** It is recommended to configure the different MPIO policies depending on iSCSI channel throughput. For 1 Gbps iSCSI channel throughput, it is recommended to set Failover Only or Least Queue Depth MPIO load balancing policy. For 10 Gbps iSCSI channel throughput, it is recommended to set Round Robin or Least Queue Depth MPIO

load balancing policy.


1. Configure the MPIO policy for each target with the load balance policy of choice. Select the Target located on the local server and click Devices.
2. In the Devices dialog, click MPIO.

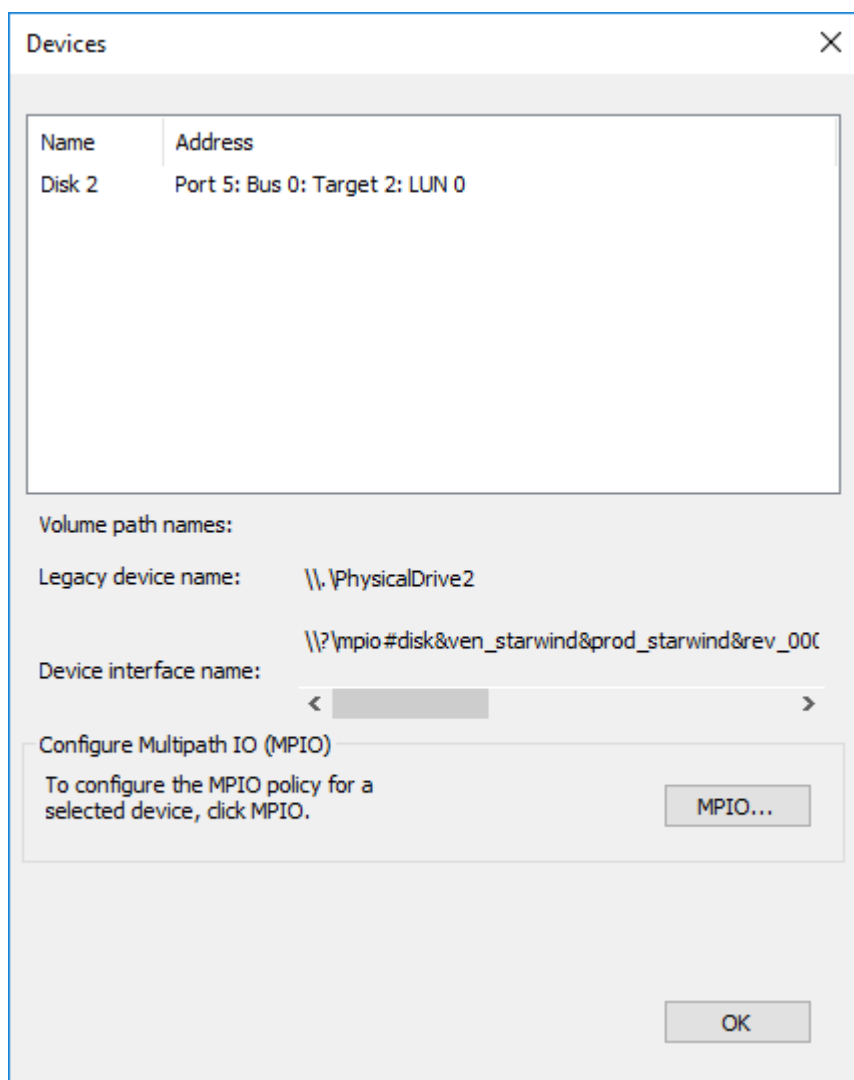


3. Select the appropriate load balancing policy.
4. Repeat the steps 1-3 for configuring the MPIO policy for each remaining device on the current node and on the partner node.

### Connecting Disks to Servers


1. Open the Disk Management snap-in. The StarWind disks will appear as unallocated and offline.

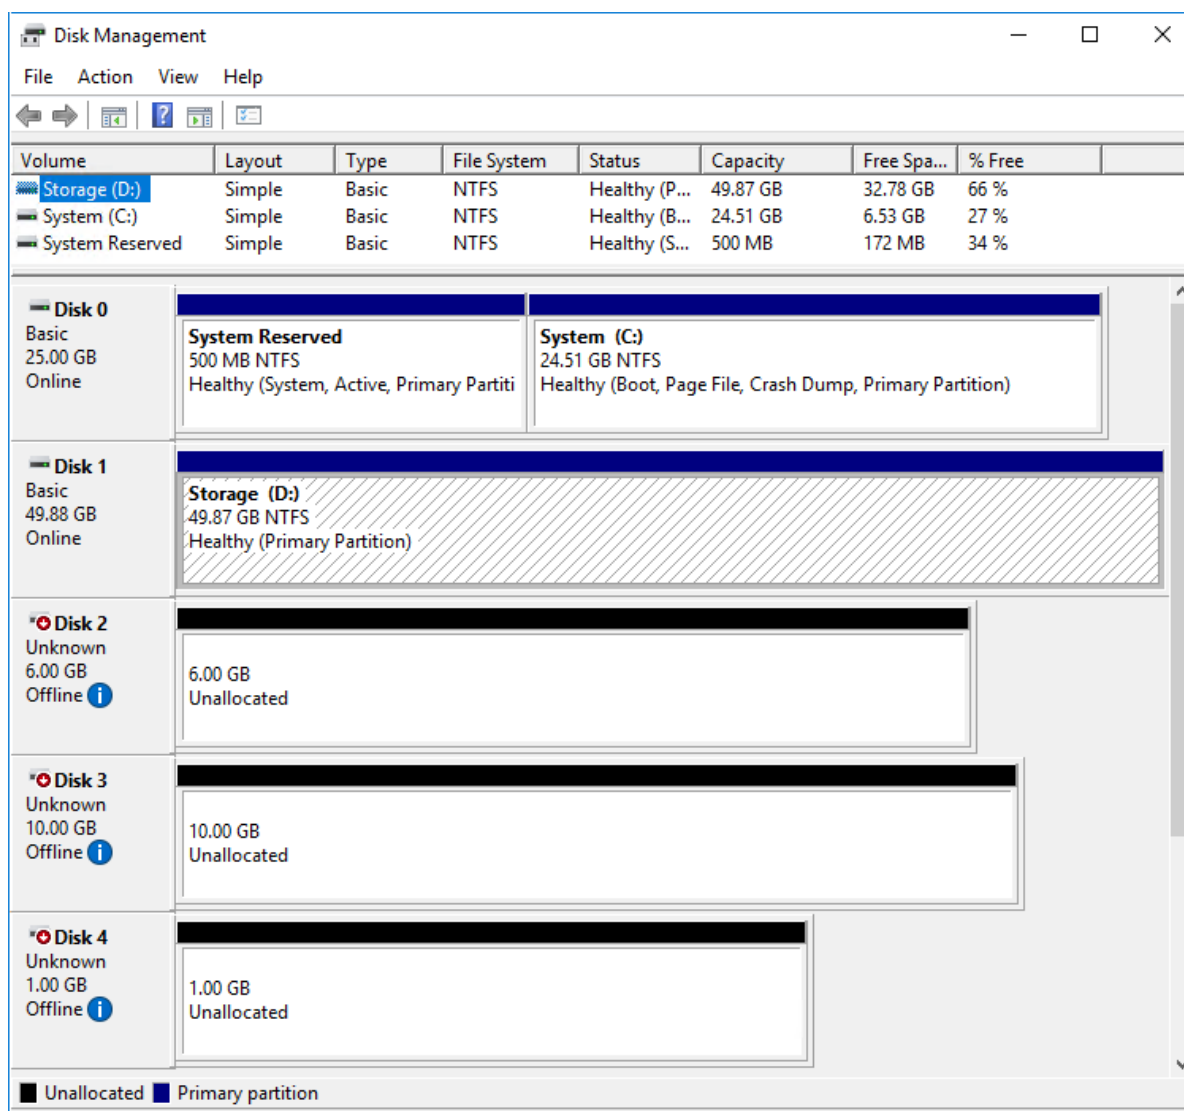


2. Bring the disks online by right-clicking on them and selecting the Online menu option.
3. Select the CSV disk (check the disk size to be sure) and right-click on it to initialize.
4. By default, the system will offer to initialize all non-initialized disks. Use the Select Disks area to choose the disks. Select GPT (GUID Partition Style) for the partition style to be applied to the disks. Press OK to confirm.

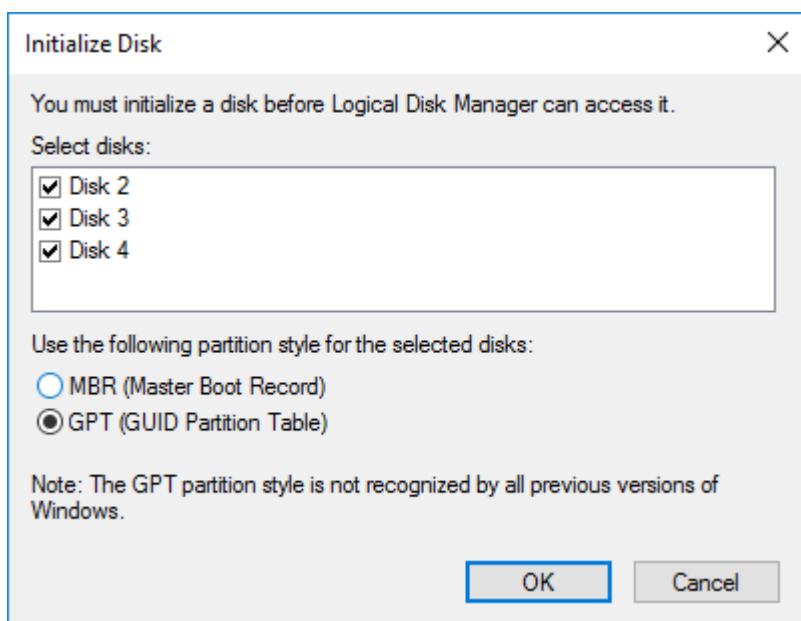

5. Right-click on the selected disk and choose New Simple Volume.
6. In New Simple Volume Wizard, indicate the volume size. Click Next.
7. Assign a drive letter to the disk. Click Next.

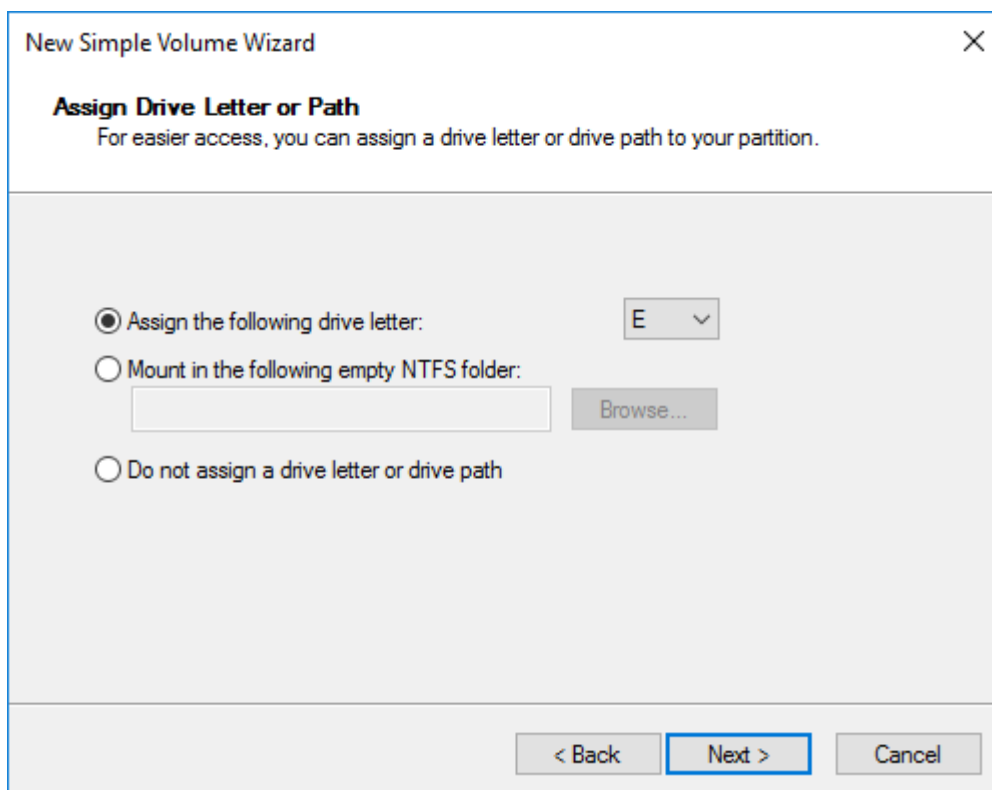

8. Select NTFS in the File System dropdown menu. Keep Allocation unit size as Default. Set the Volume Label of choice. Click Next.

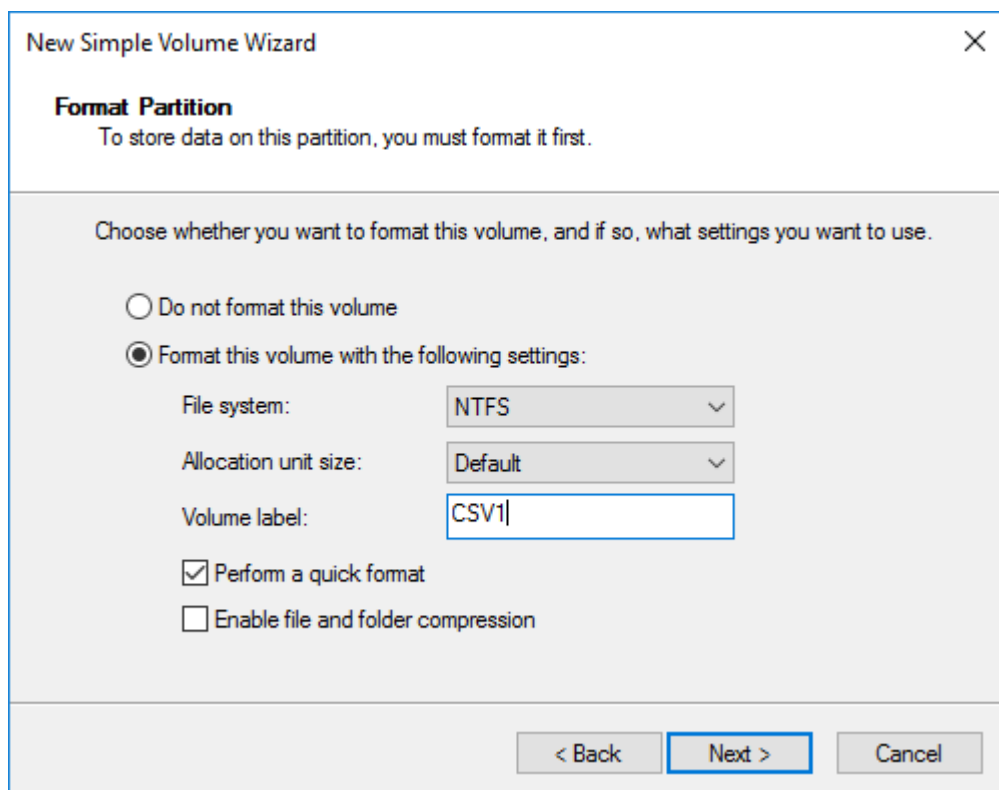

**New Simple Volume Wizard** [X]

**Format Partition**  
To store data on this partition, you must format it first.

Choose whether you want to format this volume, and if so, what settings you want to use.

☐ Do not format this volume

☒ Format this volume with the following settings:

File system: NTFS

Allocation unit size: Default

Volume label: CSV1

☒ Perform a quick format


☐ Enable file and folder compression

< Back   **Next >**   Cancel

9. Press Finish to complete.

10. Complete the steps 1-9 for the Witness disk. Do not assign any drive letter or drive path for it.



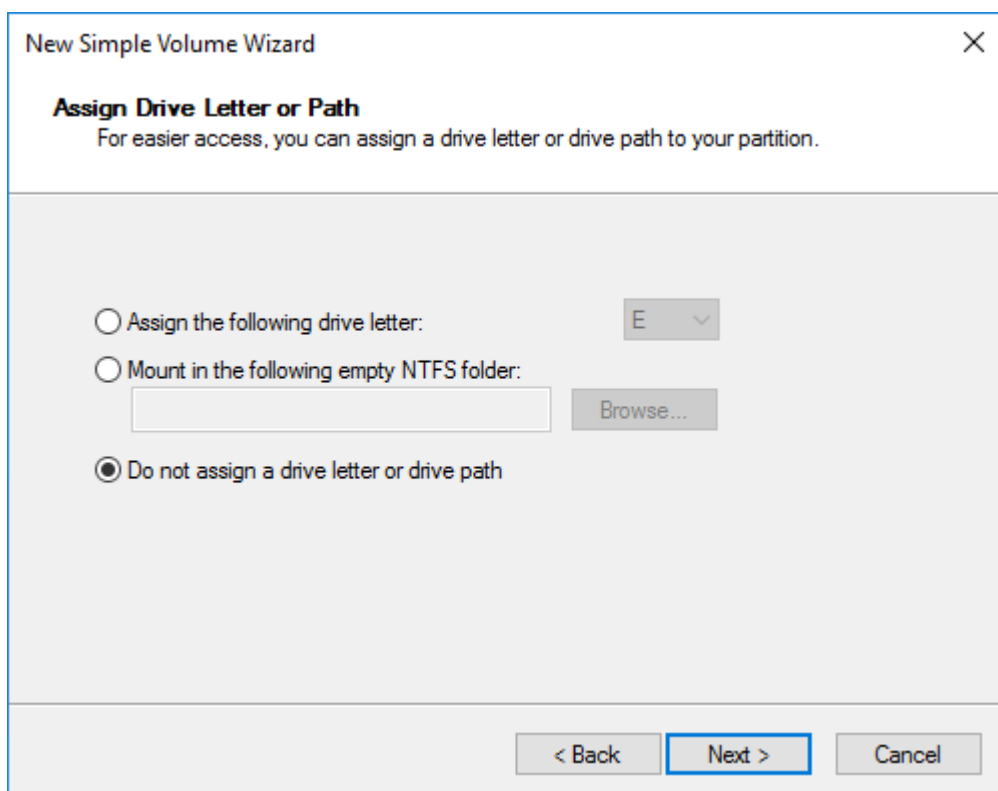

11. On the partner node, open the Disk Management snap-in. All StarWind disks will appear offline. If the status is different from the one shown below, click Action->Refresh in the top menu to update the information about the disks.

12. Repeat step 2 to bring all the remaining StarWind disks online.

## Creating A Failover Cluster In Windows Server


NOTE: To avoid issues during the cluster validation configuration, it is recommended to install the latest Microsoft updates on each node.

NOTE: Server Manager can be opened on the server with desktop experience enabled (necessary features should be installed). Alternatively, the Failover cluster can be managed with Remote Server Administration Tools:


<https://docs.microsoft.com/en-us/windows-server/remote/remote-server-administration-tools>

NOTE: For converged deployment (SAN & NAS running as a dedicated storage cluster) the Microsoft Failover Cluster is deployed on separate computing nodes. Additionally, for the converged deployment scenario, the storage nodes that host StarWind SAN & NAS as CVM or bare metal do not require a domain controller and Failover Cluster to operate.

1. Open Server Manager. Select the Failover Cluster Manager item from the Tools menu.

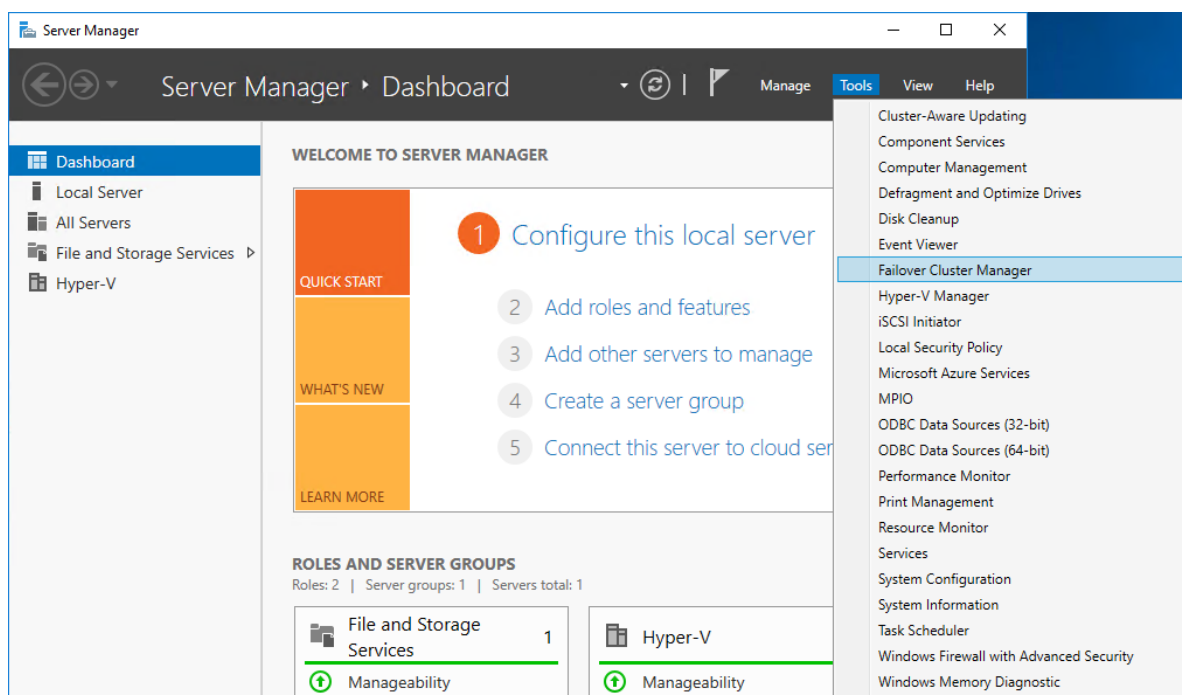

2. Click the Create Cluster link in the Actions section of Failover Cluster Manager.

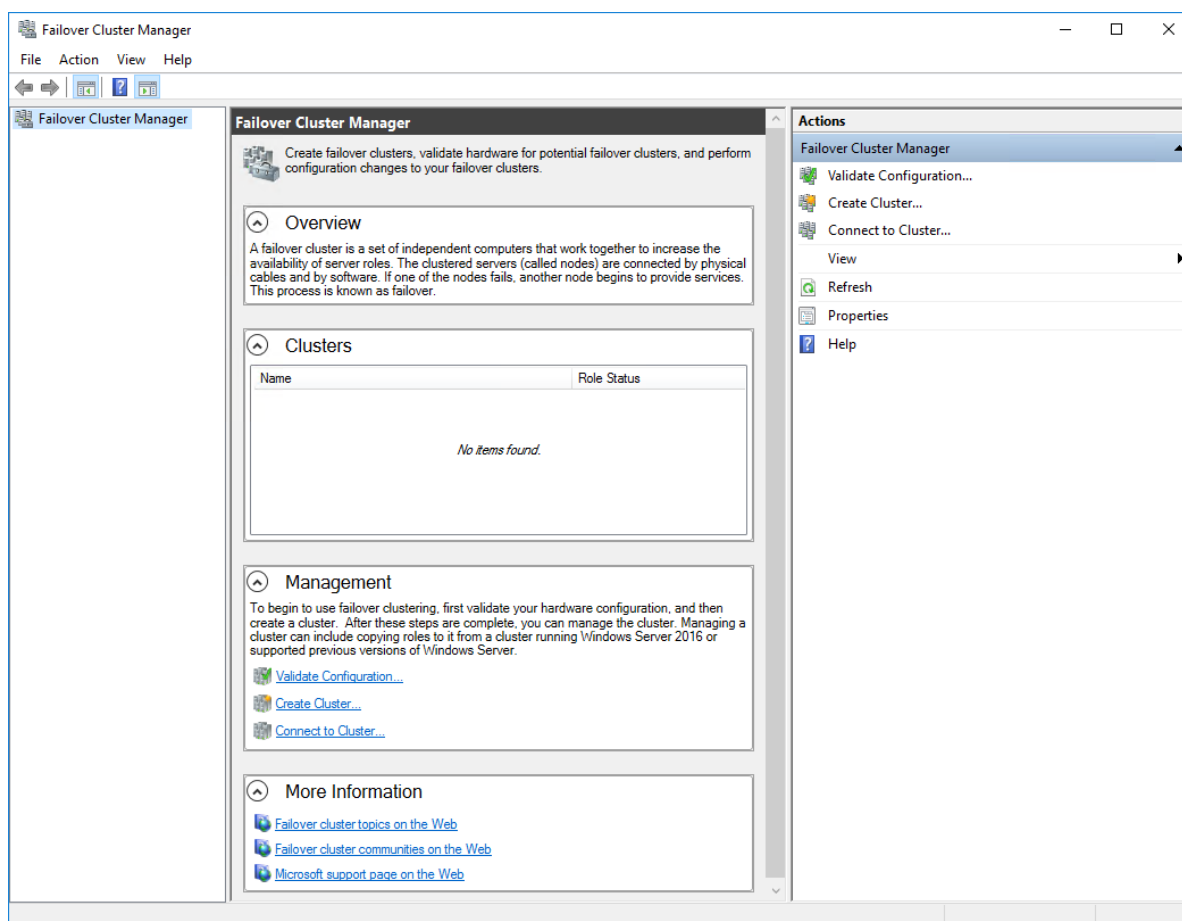

3. Specify the servers to be added to the cluster. Click Next to continue.

**Create Cluster Wizard**

**Select Servers**

Before You Begin  
**Select Servers**  
 Validation Warning  
 Access Point for Administering the Cluster  
 Confirmation  
 Creating New Cluster  
 Summary

Add the names of all the servers that you want to have in the cluster. You must add at least one server.


Enter server name:  **Browse...**

Selected servers:  
 SW1.starwind.local  
 SW2.starwind.local

**Add** **Remove**


< Previous **Next >** Cancel

4. Validate the configuration by running the cluster validation tests: select Yes... and click Next to continue.

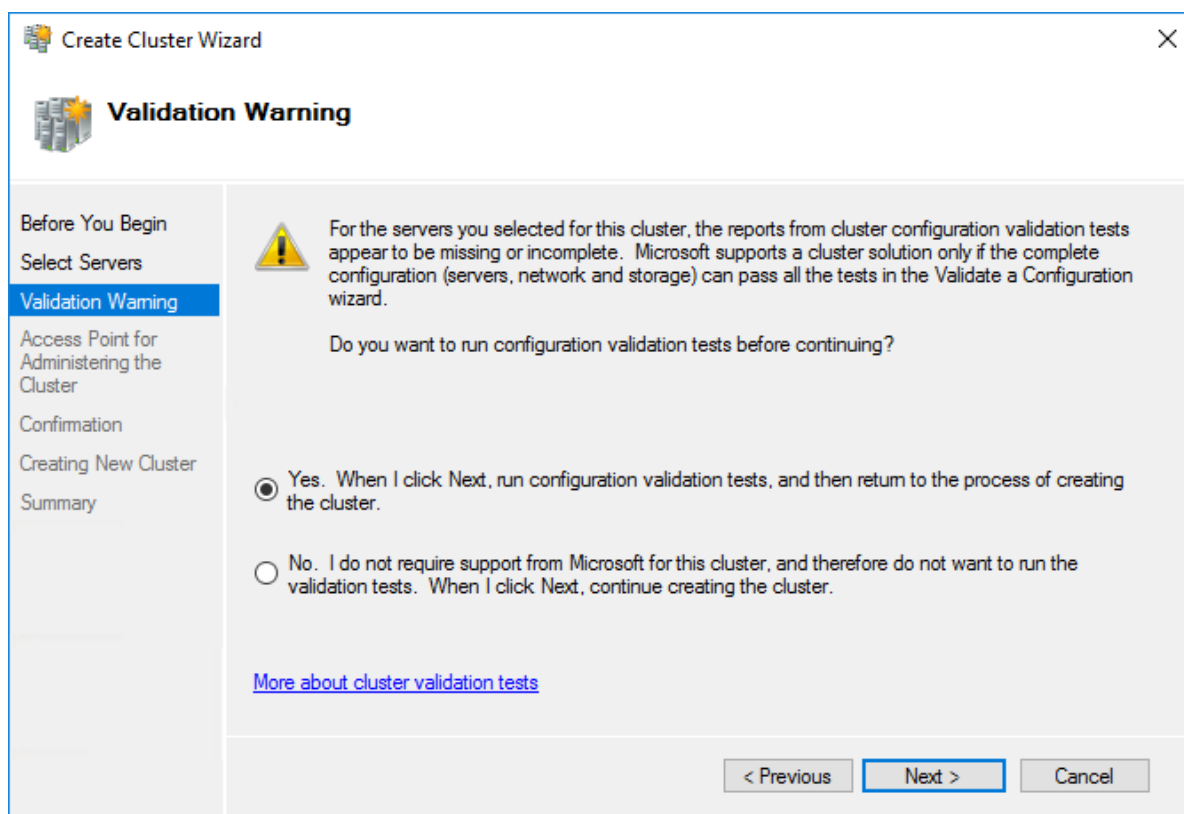

5. Specify the cluster name.

NOTE: If the cluster servers get IP addresses over DHCP, the cluster also gets its IP address over DHCP. If the IP addresses are set statically, set the cluster IP address manually.

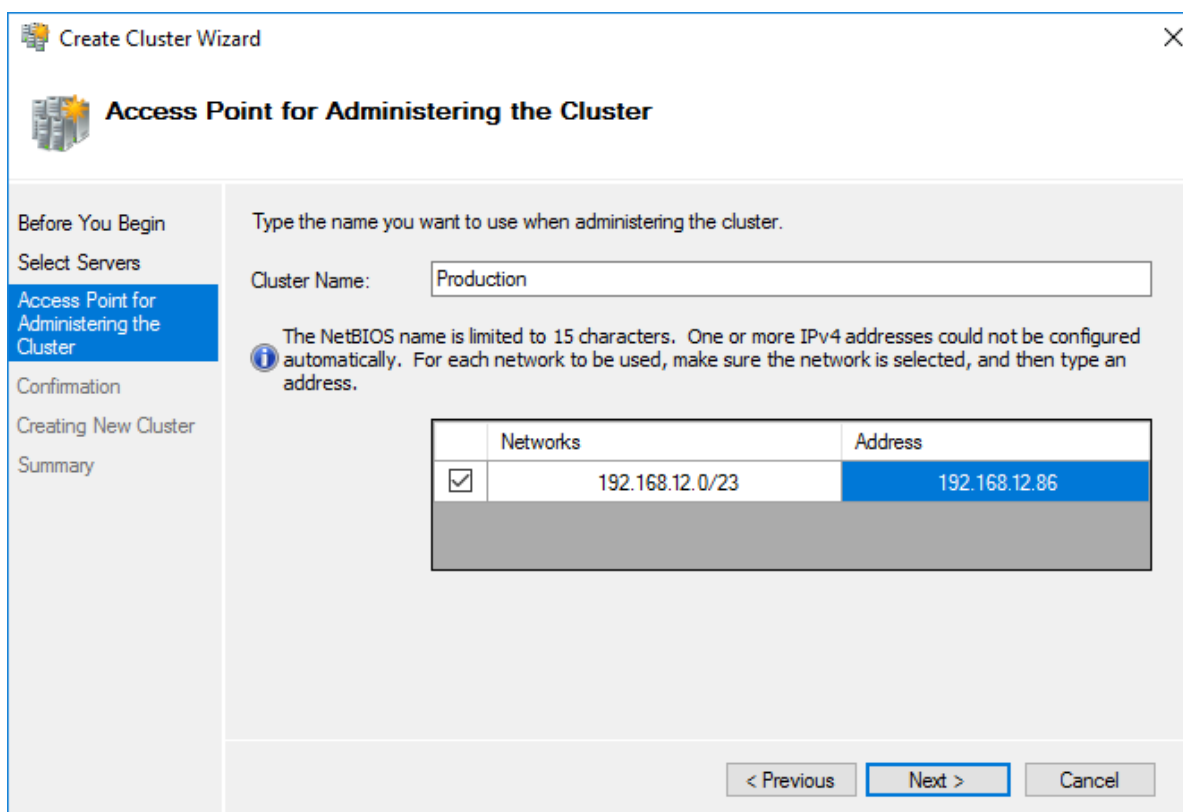

**Create Cluster Wizard**

**Access Point for Administering the Cluster**

Before You Begin  
Select Servers  
**Access Point for Administering the Cluster**  
Confirmation  
Creating New Cluster  
Summary

Type the name you want to use when administering the cluster.


Cluster Name:

**i** The NetBIOS name is limited to 15 characters. One or more IPv4 addresses could not be configured automatically. For each network to be used, make sure the network is selected, and then type an address.

	Networks	Address
<input checked="" type="checkbox"/>	192.168.12.0/23	192.168.12.86

< Previous   **Next >**   Cancel

6. Make sure that all settings are correct. Click Previous to make any changes or Next to proceed.

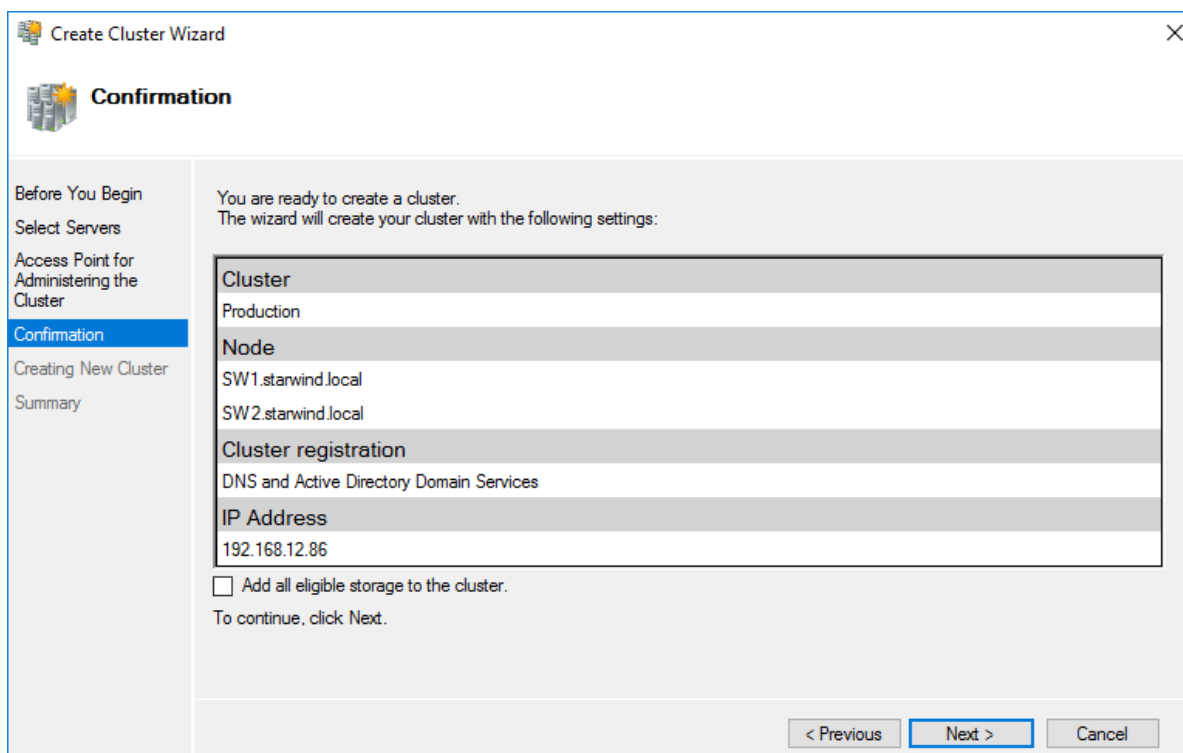

**Create Cluster Wizard**

**Confirmation**

Before You Begin  
Select Servers  
Access Point for Administering the Cluster  
**Confirmation**  
Creating New Cluster  
Summary

You are ready to create a cluster.  
The wizard will create your cluster with the following settings:


<b>Cluster</b>	Production
<b>Node</b>	SW1.starwind.local SW2.starwind.local
<b>Cluster registration</b>	DNS and Active Directory Domain Services
<b>IP Address</b>	192.168.12.86

☐ Add all eligible storage to the cluster.  
To continue, click Next.

< Previous   **Next >**   Cancel


NOTE: If checkbox Add all eligible storage to the cluster is selected, the wizard will add all disks to the cluster automatically. The device with the smallest storage volume will be assigned as a Witness. It is recommended to uncheck this option before clicking Next and add cluster disks and the Witness drive manually.

7. The process of the cluster creation starts. Upon the completion, the system displays the summary with the detailed information. Click Finish to close the wizard.

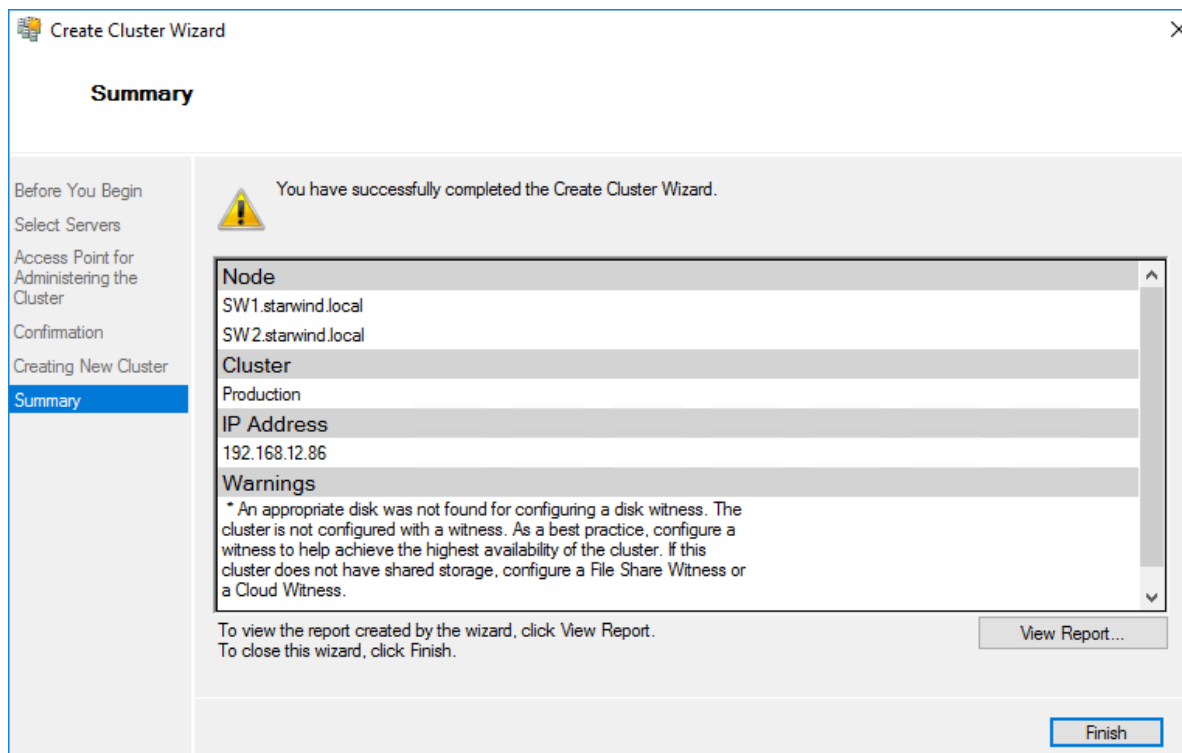


## Adding Storage to the Cluster

1. In Failover Cluster Manager, navigate to Cluster -> Storage -> Disks. Click Add Disk in the Actions panel, choose StarWind disks from the list and confirm the selection.

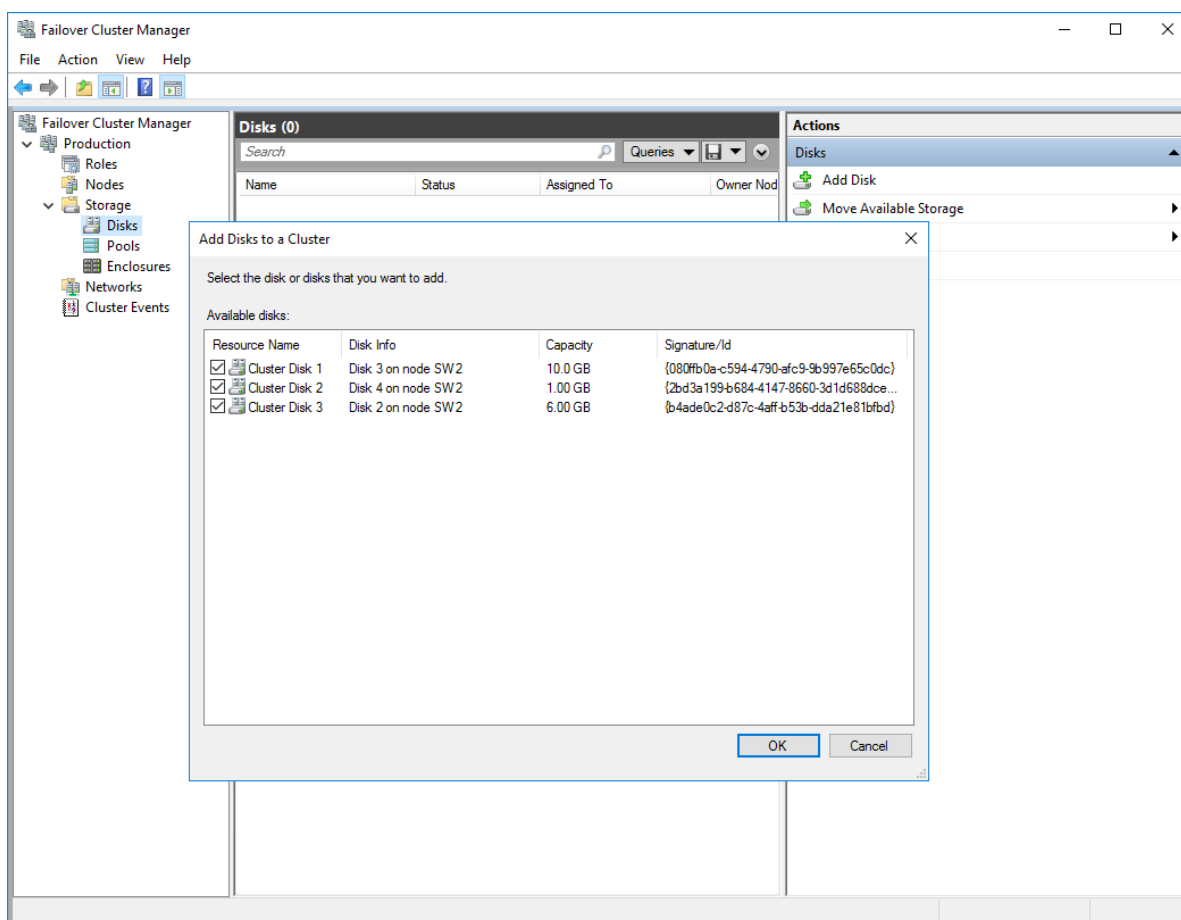


2. To configure the cluster witness disk, right-click on Cluster and proceed to More Actions -> Configure Cluster Quorum Settings.

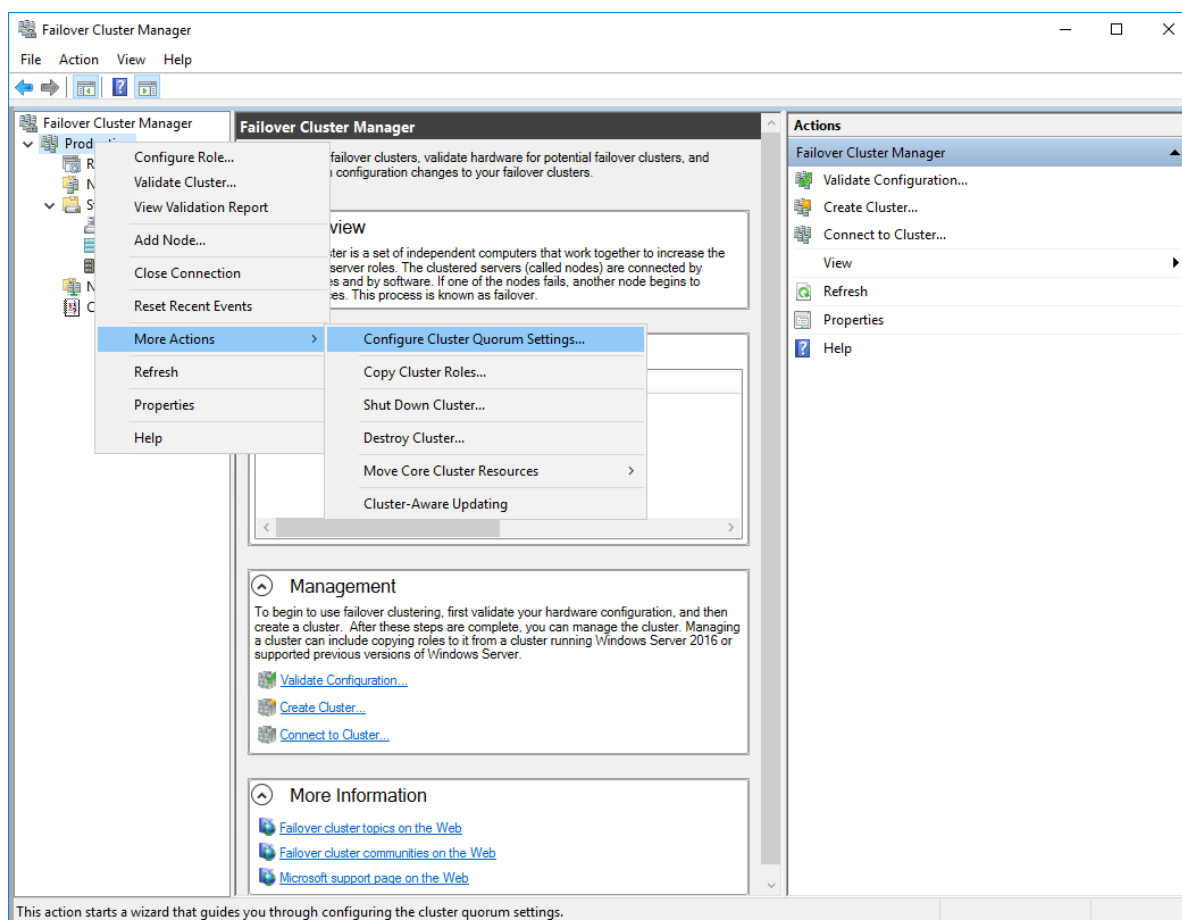


3. Follow the wizard and use the Select the quorum witness option. Click Next.




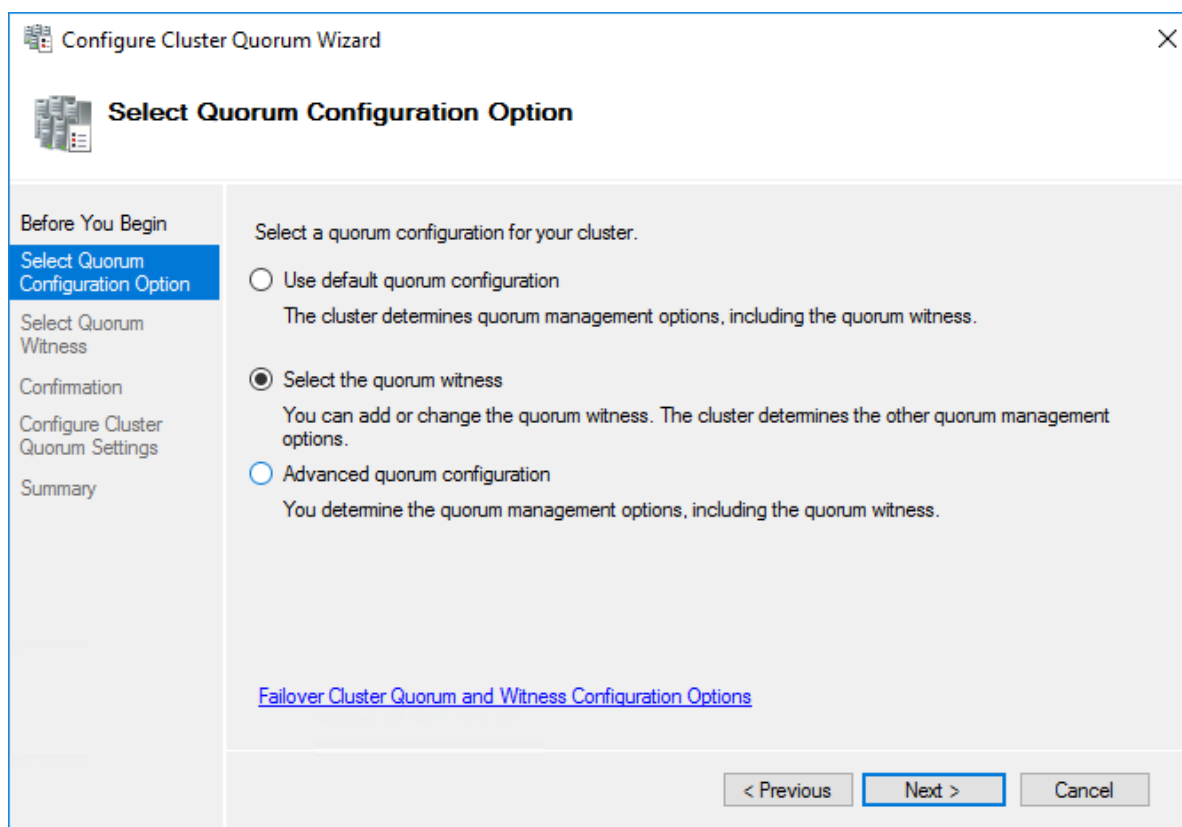


4. Select Configure a disk witness. Click Next.

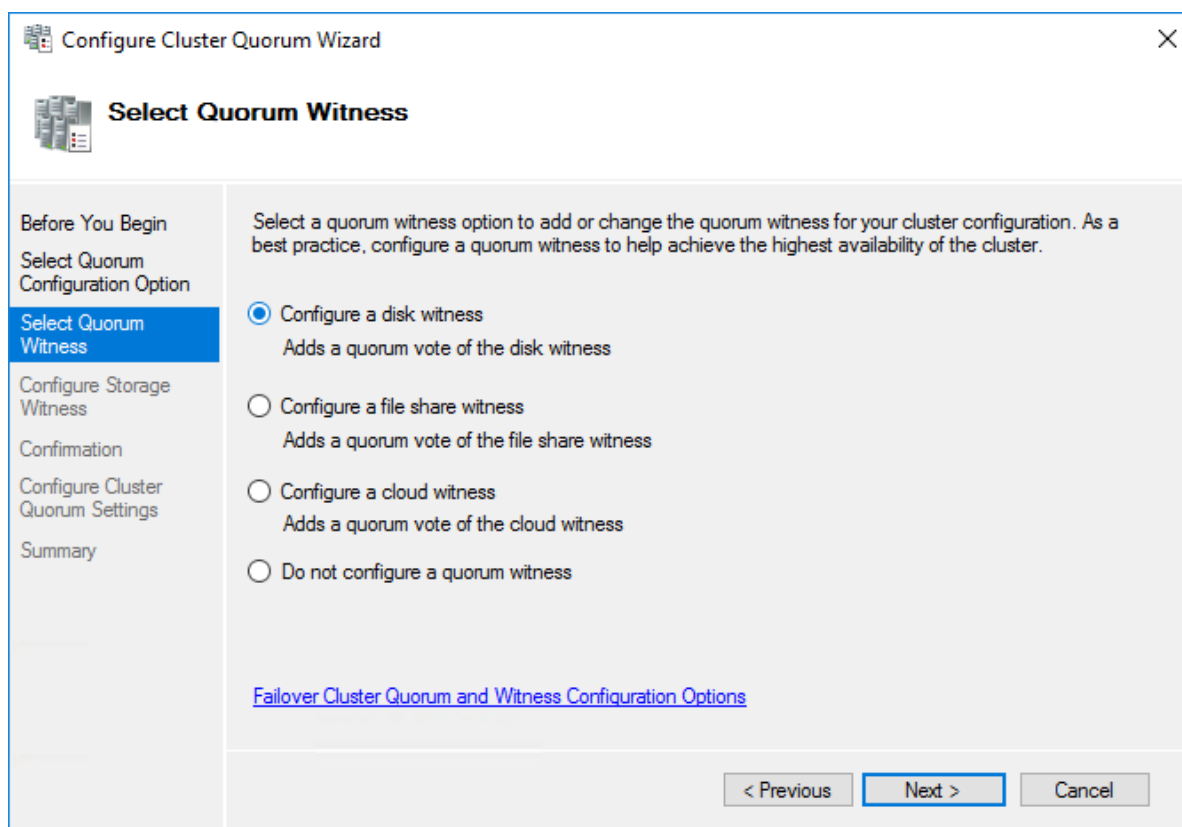


5. Select the Witness disk to be assigned as the cluster witness disk. Click Next and press Finish to complete the operation.

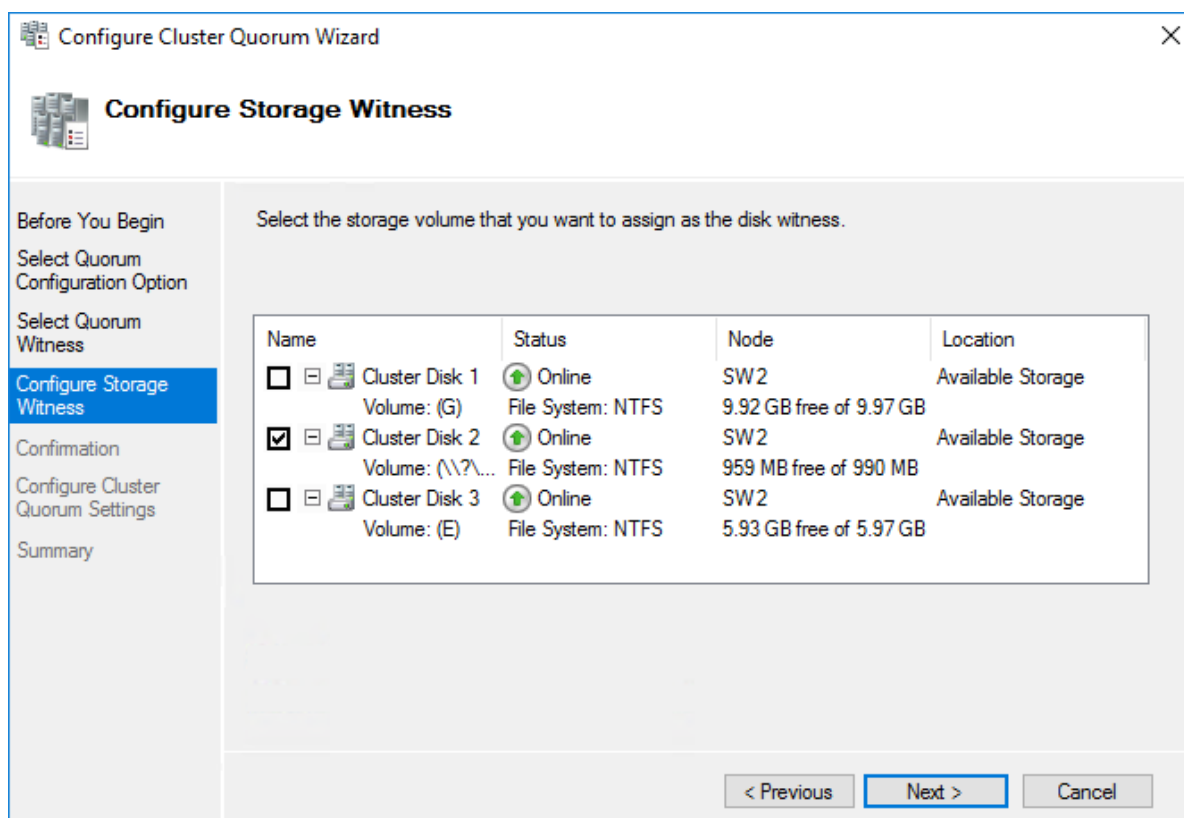


6. In Failover Cluster Manager, Right-click the disk and select Add to Cluster Shared Volumes.

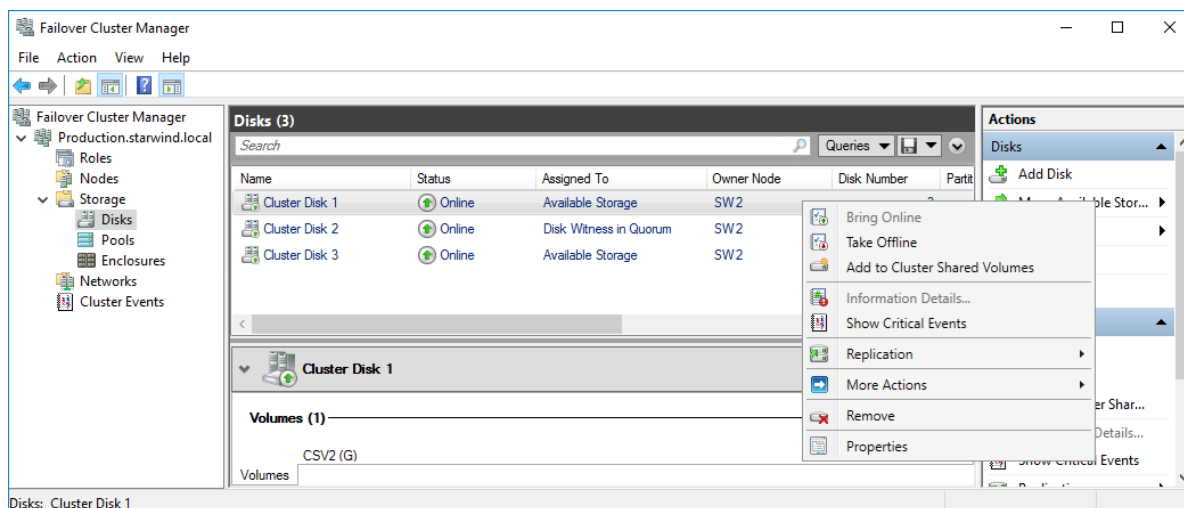

7. If renaming of the cluster shared volume is required, right-click on the disk and select Properties. Type the new name for the disk and click Apply followed by OK.

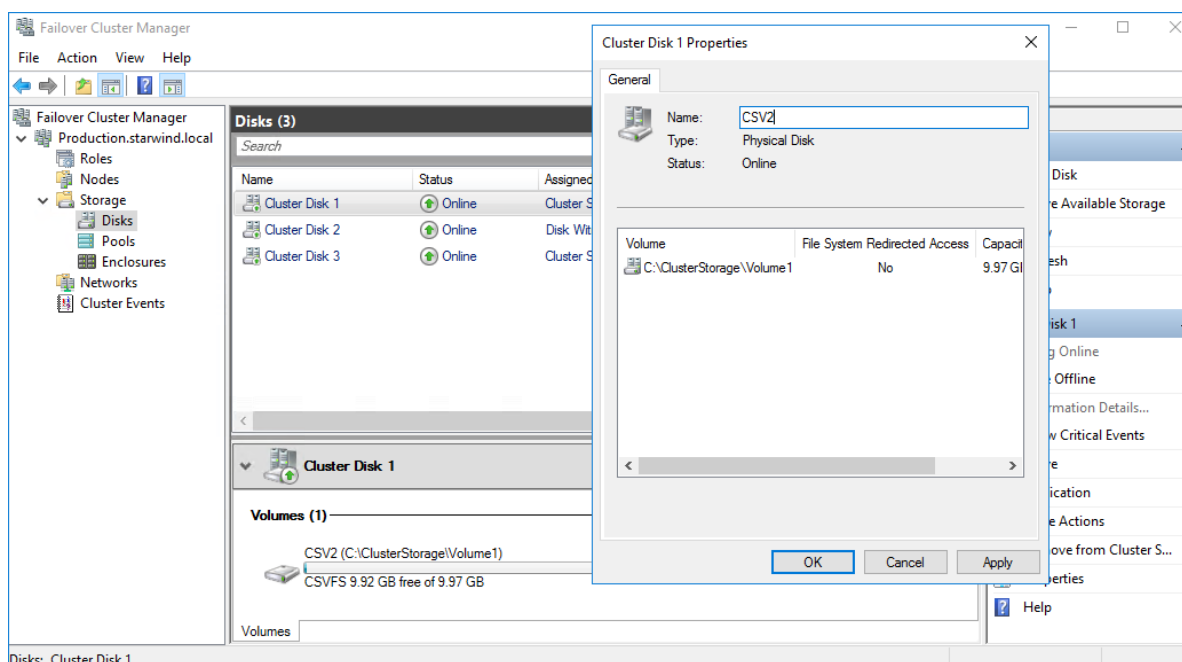

8. Perform the steps 6-7 for any other disk in Failover Cluster Manager. The resulting list of disks will look similar to the screenshot below.

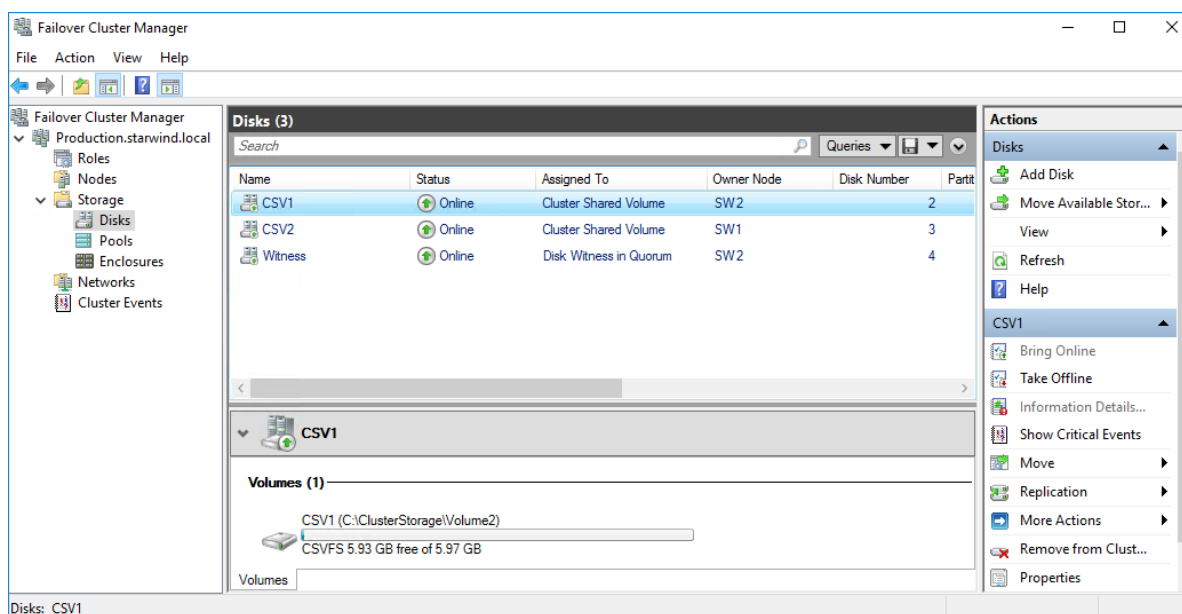


## Configuring Cluster Network Preferences


1. In the Networks section of the Failover Cluster Manager, right-click on the network from the list. Set its new name if required to identify the network by its subnet. Apply the change and press OK.

NOTE: Please double-check that cluster communication is configured with redundant networks:


<https://docs.microsoft.com/en-us/windows-server/failover-clustering/smb-multichannel>

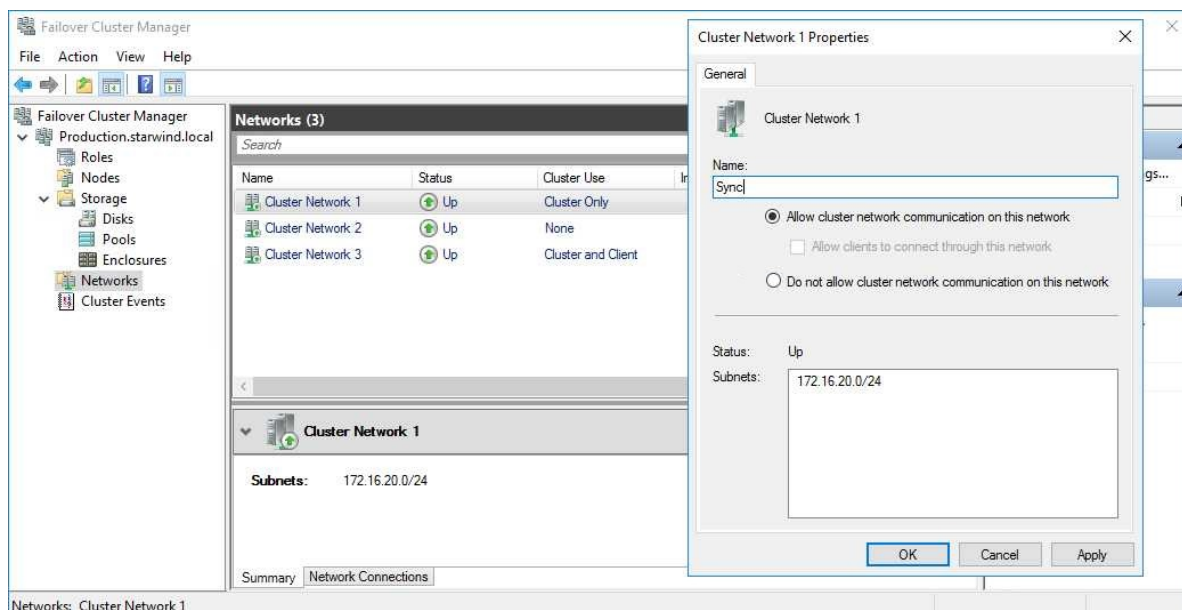

2. Rename other networks as described above, if required.

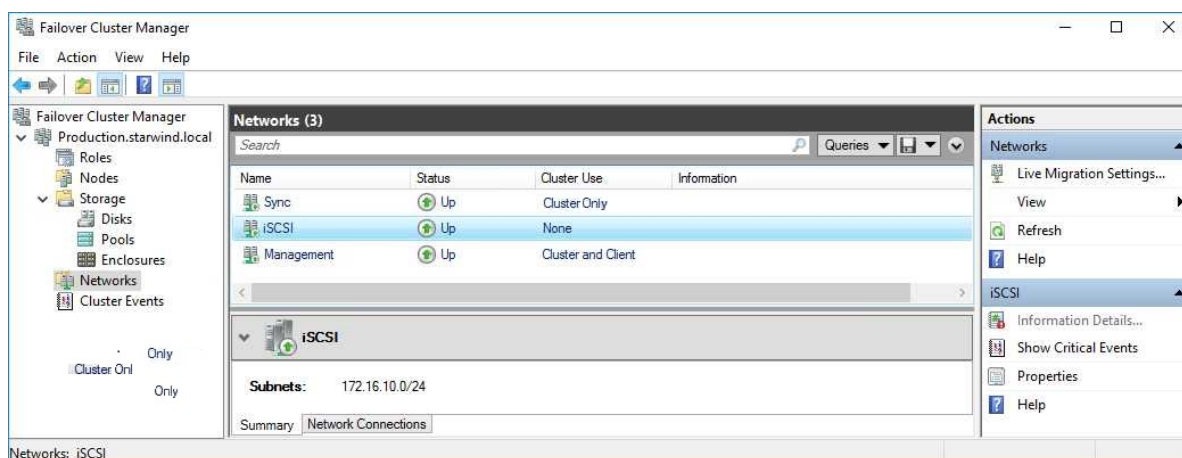

3. In the Actions tab, click Live Migration Settings. Uncheck the synchronization network, while the iSCSI network can be used if it is 10+ Gbps. Apply the changes and click OK.

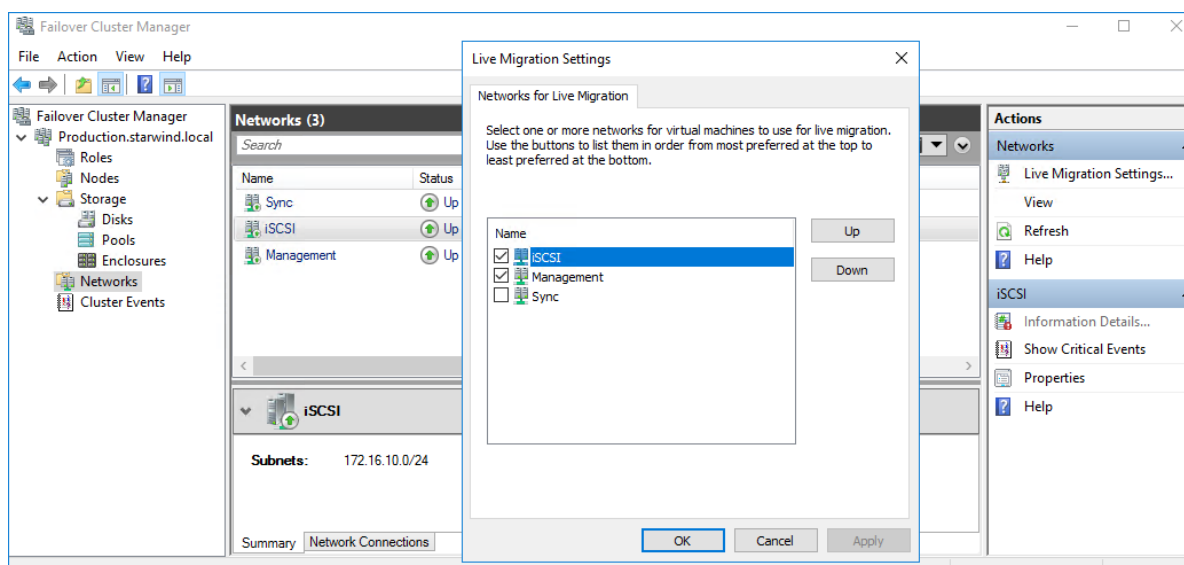


The cluster configuration is completed and it is ready for virtual machines deployment. Select Roles and in the Action tab, click Virtual Machines -> New Virtual Machine. Complete the wizard.

## Configuring File Shares


Please follow the steps below if file shares should be configured on cluster nodes.

## Configuring The Scale-Out File Server Role


1. To configure the Scale-Out File Server Role, open Failover Cluster Manager.
2. Right-click the cluster name, then click Configure Role and click Next to continue.

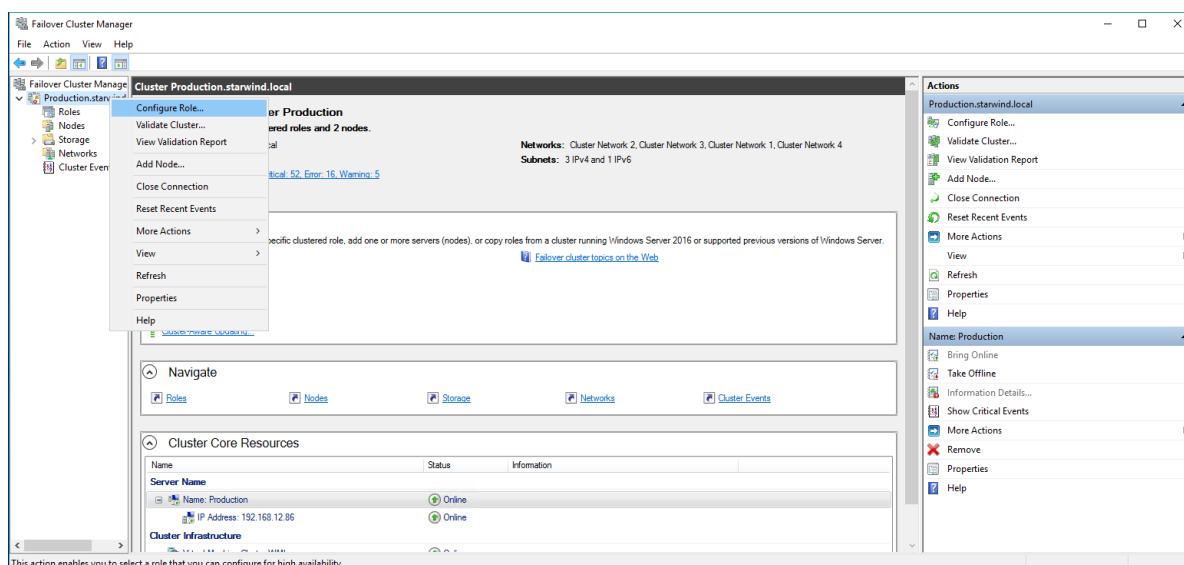

3. Select the File Server item from the list in High Availability Wizard and click Next to continue.

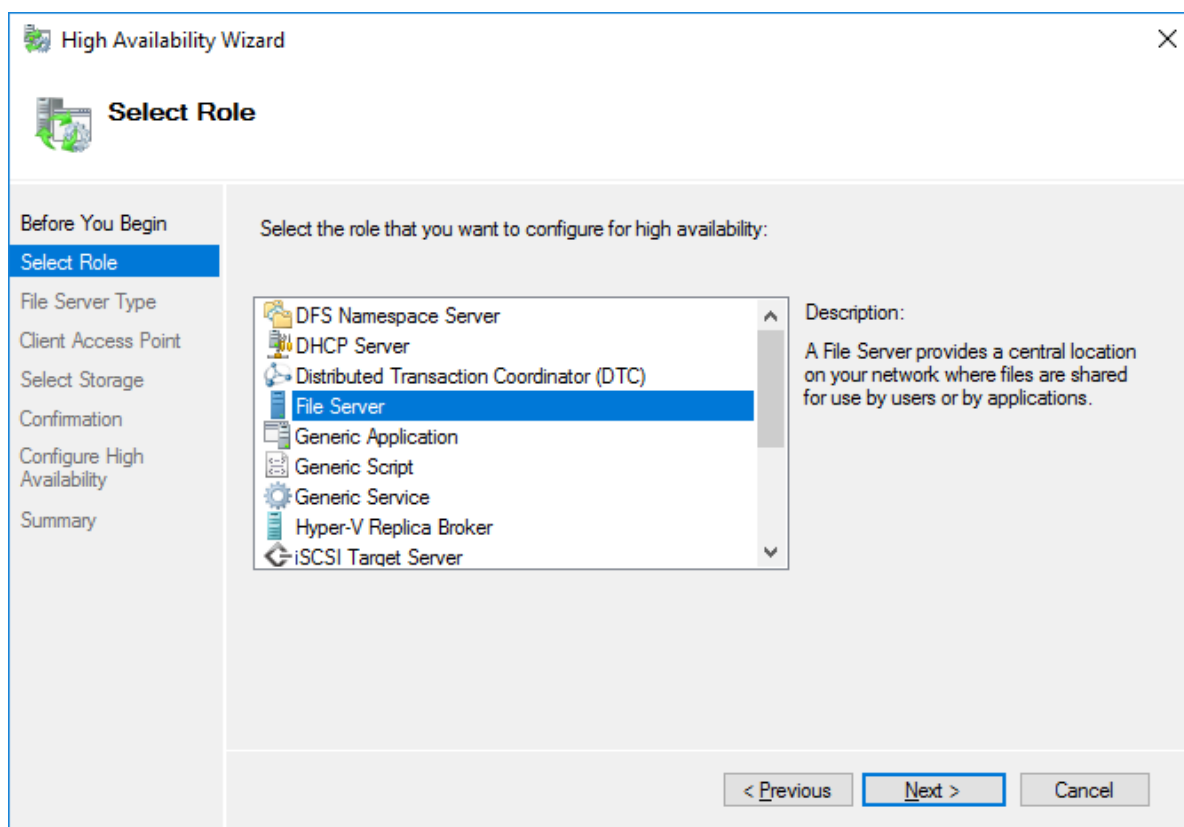


4. Select Scale-Out File Server for application data and click Next.

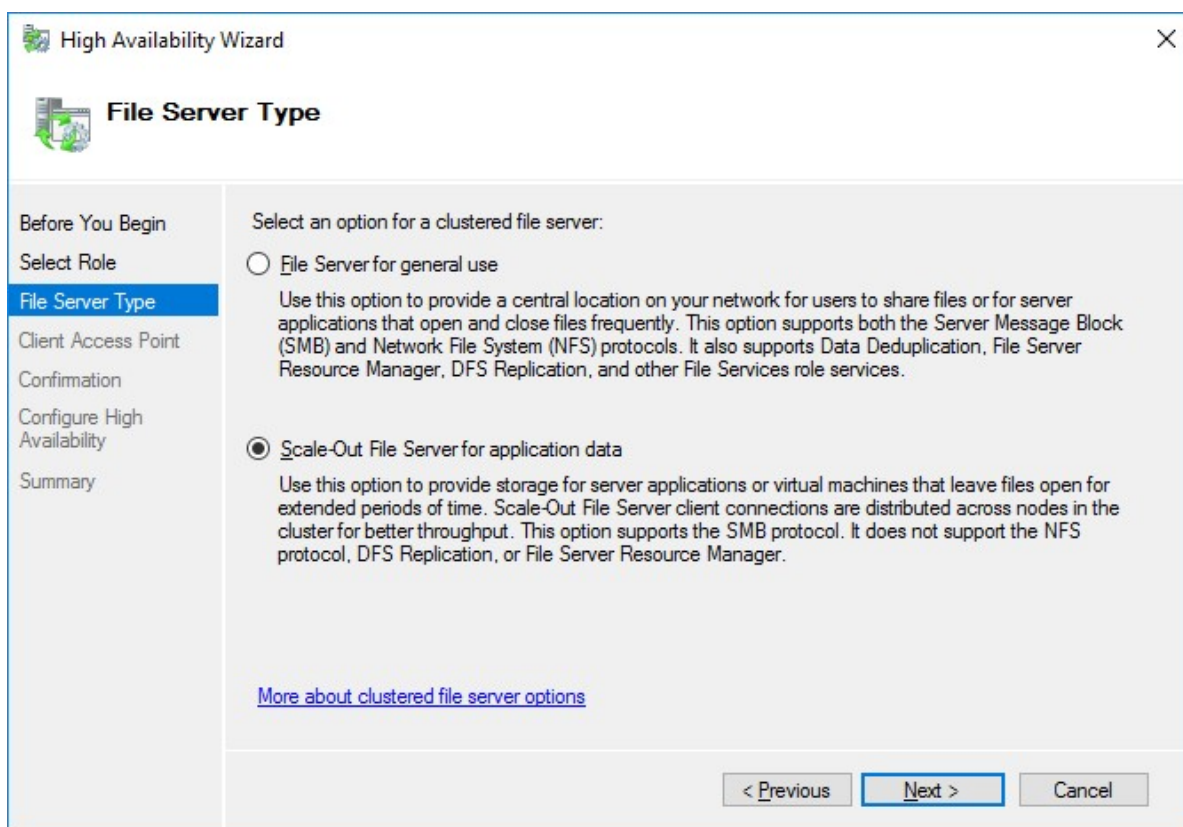

5. On the Client Access Point page, in the Name text field, type the NetBIOS name that will be used to access a Scale-Out File Server.




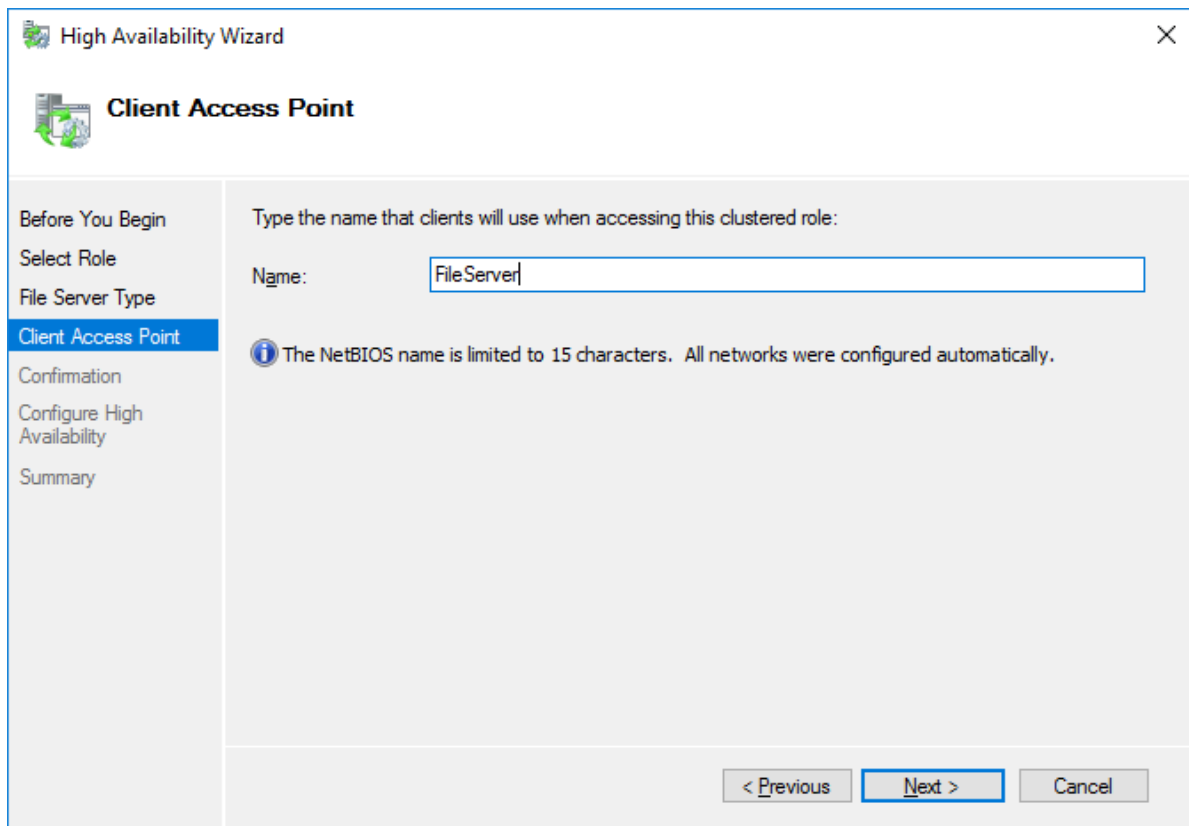


The image shows a screenshot of the 'High Availability Wizard' window, specifically the 'Client Access Point' step. The window has a title bar with the text 'High Availability Wizard' and a close button. Below the title bar, there is a section with a server icon and the text 'Client Access Point'. On the left side, there is a vertical list of steps: 'Before You Begin', 'Select Role', 'File Server Type', 'Client Access Point' (which is highlighted with a blue background), 'Confirmation', 'Configure High Availability', and 'Summary'. The main area of the wizard contains the text 'Type the name that clients will use when accessing this clustered role:' followed by a text input field with the value 'FileServer'. Below the input field, there is an information icon and a message: 'The NetBIOS name is limited to 15 characters. All networks were configured automatically.' At the bottom right of the wizard, there are three buttons: '< Previous', 'Next >' (which is highlighted with a blue border), and 'Cancel'.

Click Next to continue.


6. Check whether the specified information is correct. Click Next to continue or Previous to change the settings.

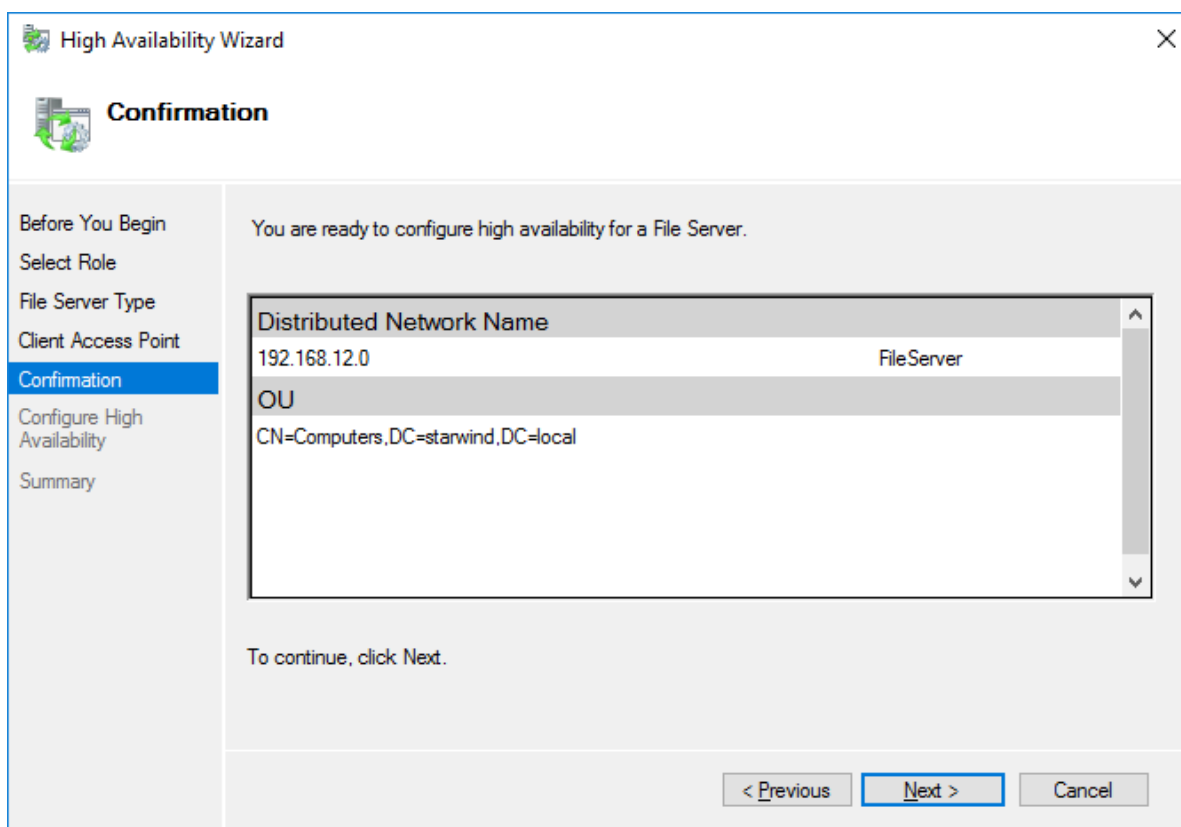


7. Once the installation is finished successfully, the Wizard should now look like the screenshot below.  
Click Finish to close the Wizard.

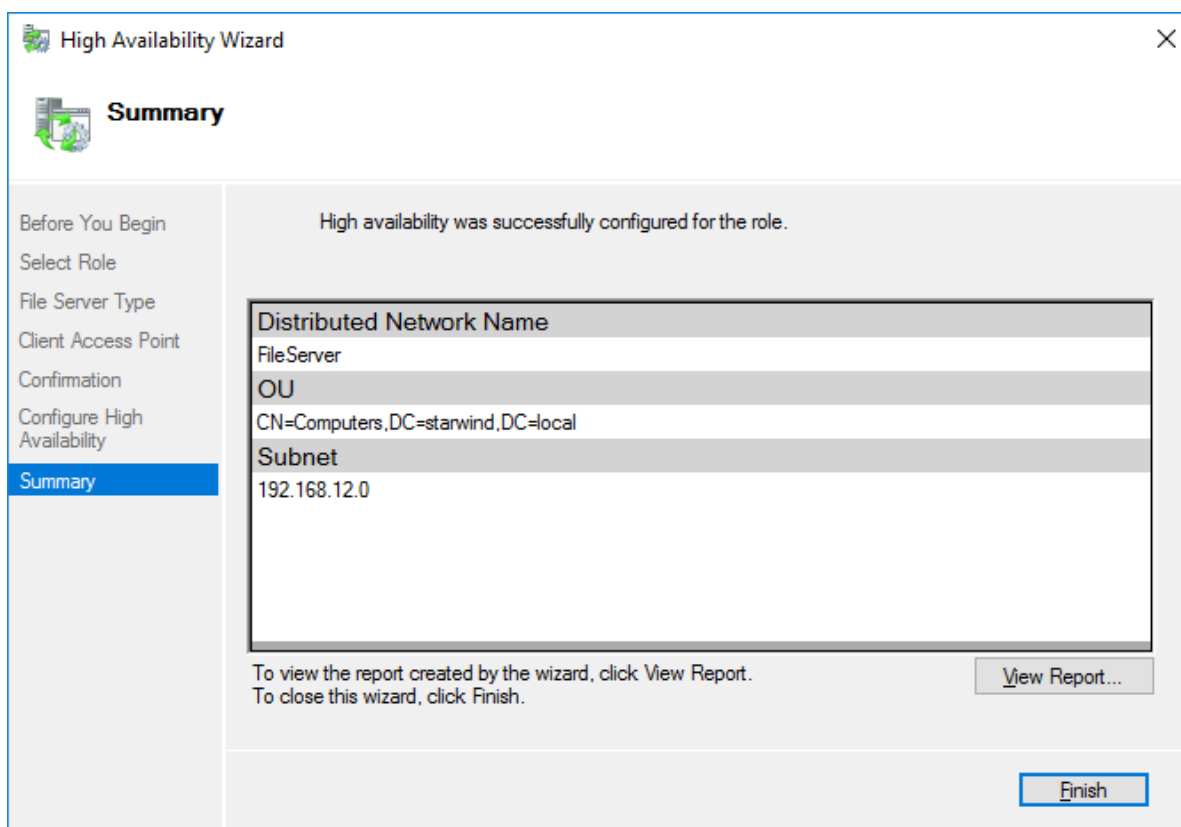


8. The newly created role should now look like the screenshot below.

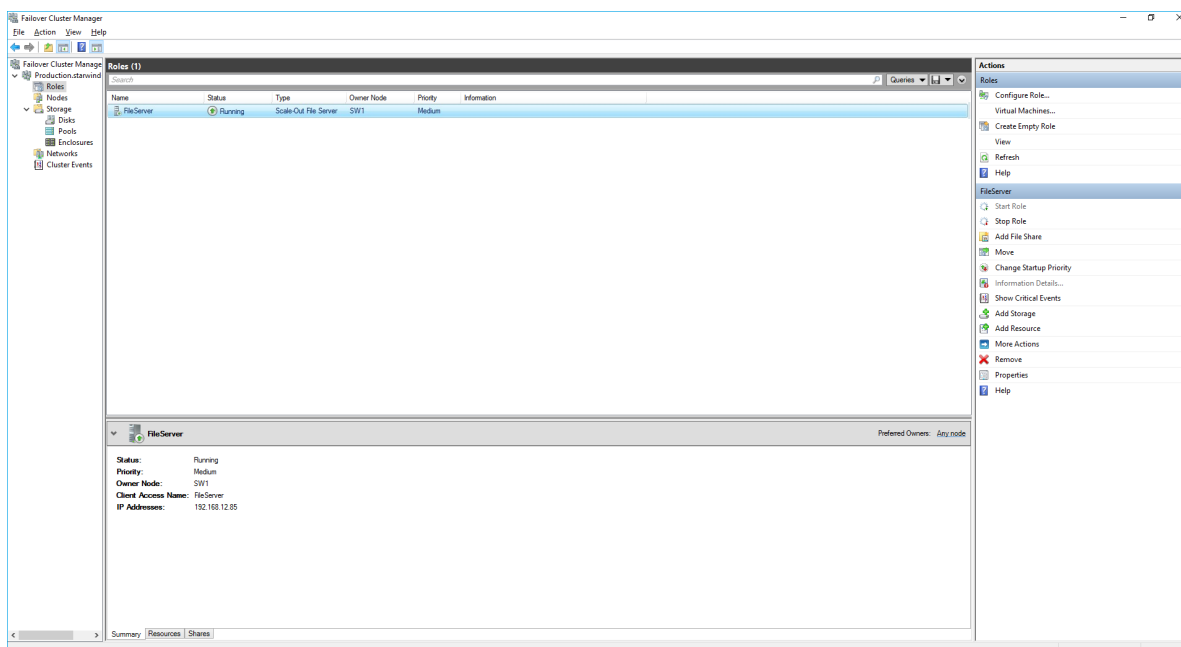


NOTE: If the role status is Failed and it is unable to Start, please, follow the next steps:

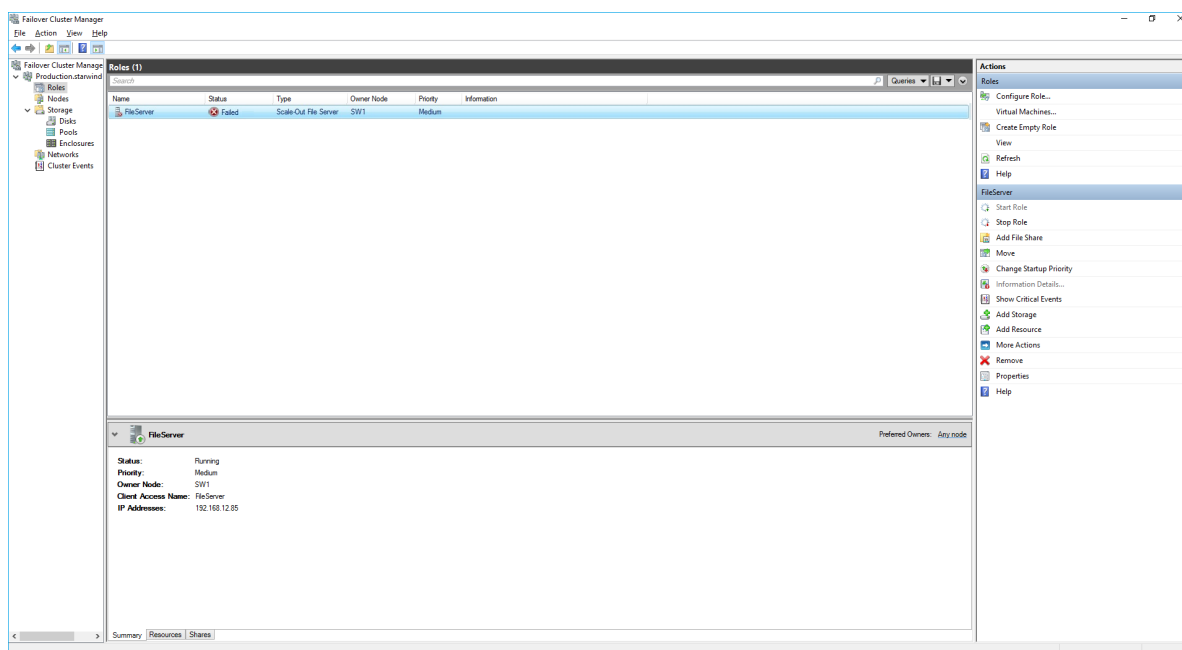

- open Active Directory Users and Computers
- enable the Advanced view if it is not enabled
- edit the properties of the OU containing the cluster computer object (in this case – Production)
- open the Security tab and click Advanced
- in the appeared window, press Add (the Permission Entry dialog box opens), click Select a principal
- in the appeared window, click Object Types, select Computers, and click OK
- enter the name of the cluster computer object (in this case – Production)

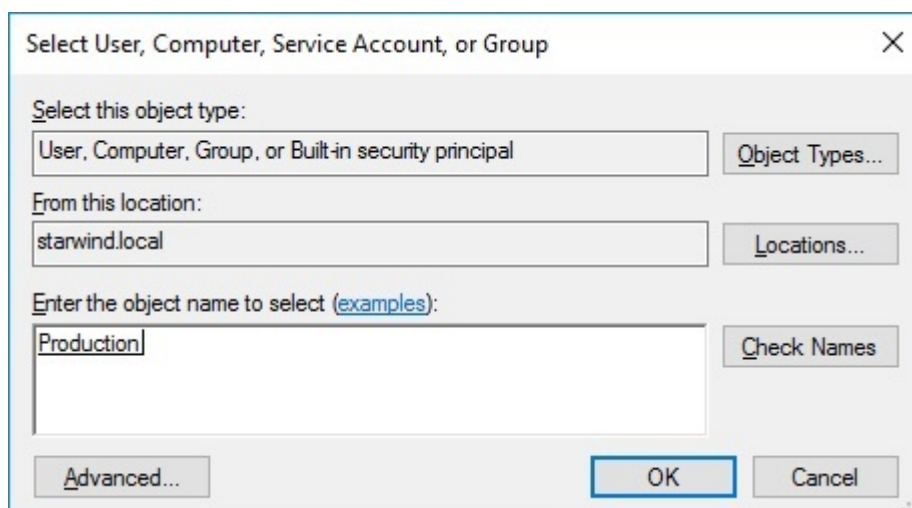

- go back to Permission Entry dialog, scroll down, and select Create Computer Objects,

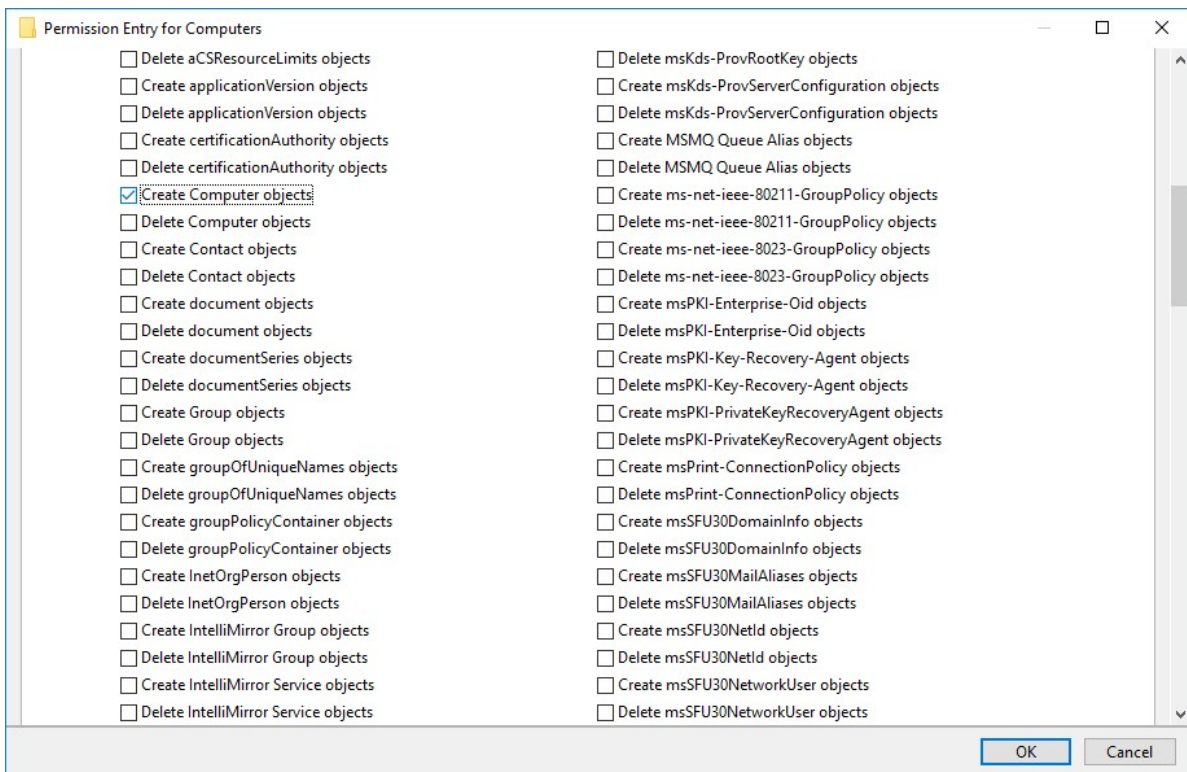


- click OK on all opened windows to confirm the changes
- open Failover Cluster Manager, right-click SOFS role and click Start Role

## Configuring File Share

### To Add File Share:

- open Failover Cluster Manager
- expand the cluster and then click Roles
- right-click the file server role and then press Add File Share
- on the Select the profile for this share page, click SMB Share – Applications and then click Next

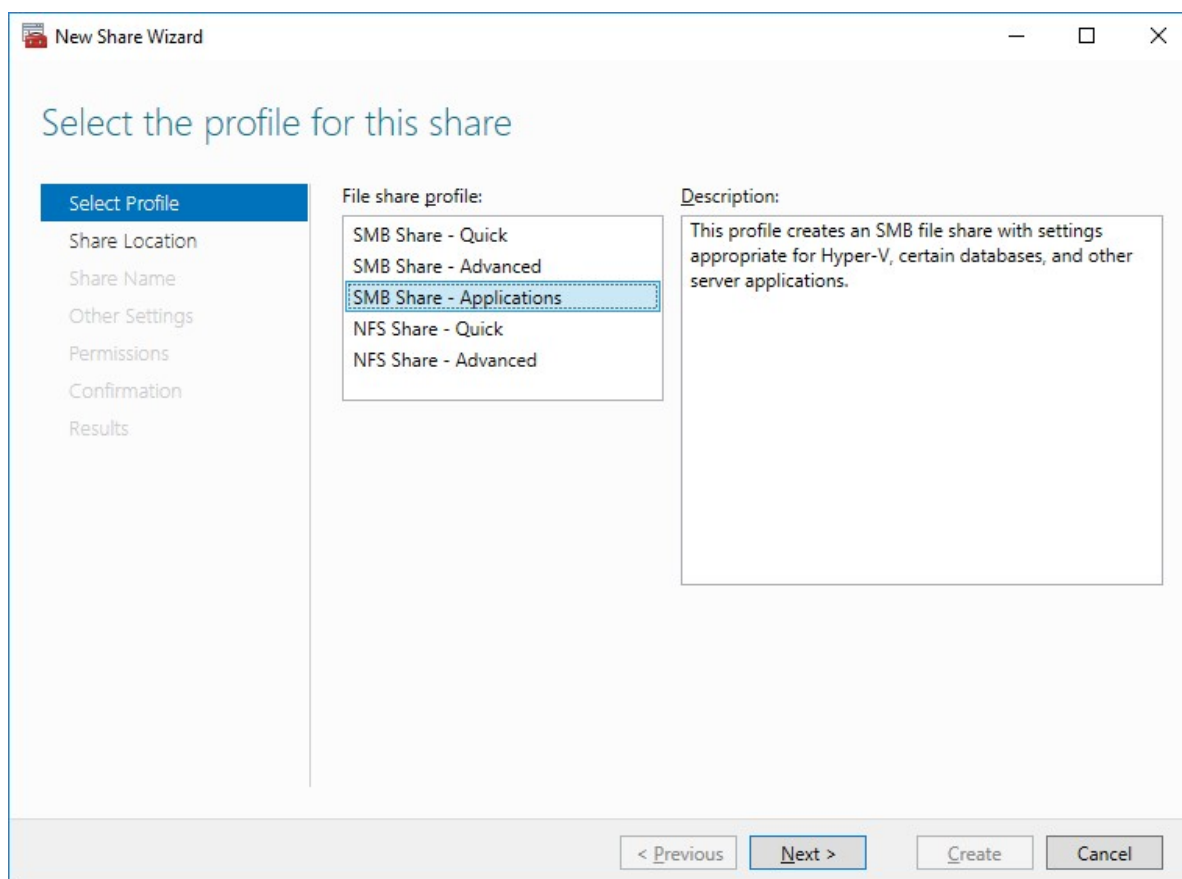

5. Select a CSV to host the share. Click Next to proceed.

New Share Wizard

Select the server and path for this share

Select Profile

**Share Location**

Share Name

Other Settings

Permissions

Confirmation

Results

Server:

Server Name	Status	Cluster Role	Owner Node
FileServer	Online	Scale-Out File...	

Share location:

☒ Select by volume:

Volume	Free Space	Capacity	File System
C:\ClusterStorage\Volume1	5.92 GB	5.97 GB	CSVFS
C:\ClusterStorage\Volume2	9.91 GB	9.97 GB	CSVFS

The location of the file share will be a new folder in the \Shares directory on the selected volume.


☐ Type a custom path:

< Previous   Next >   Create   Cancel


6. Type in the file share name and click Next.

7. Make sure that the Enable Continuous Availability box is checked. Click Next to proceed.



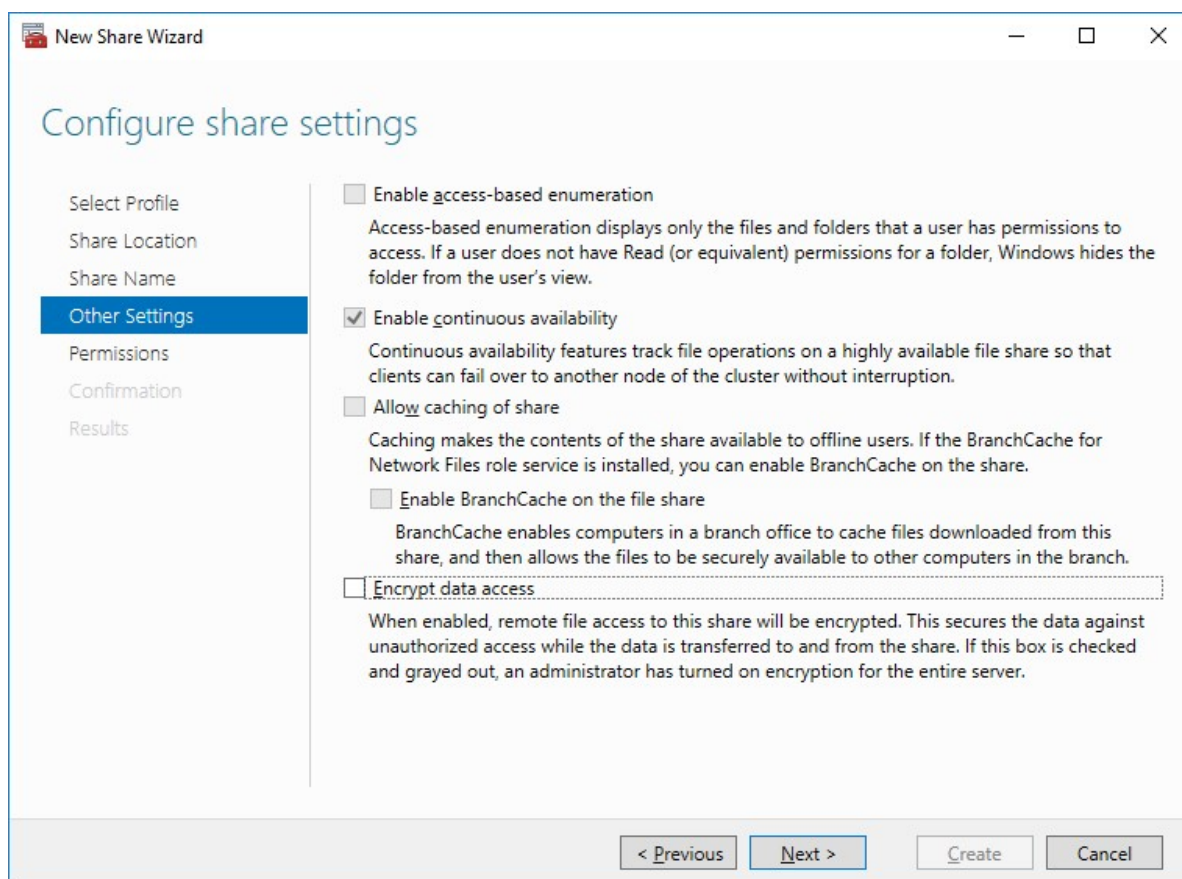


8. Specify the access permissions for the file share.

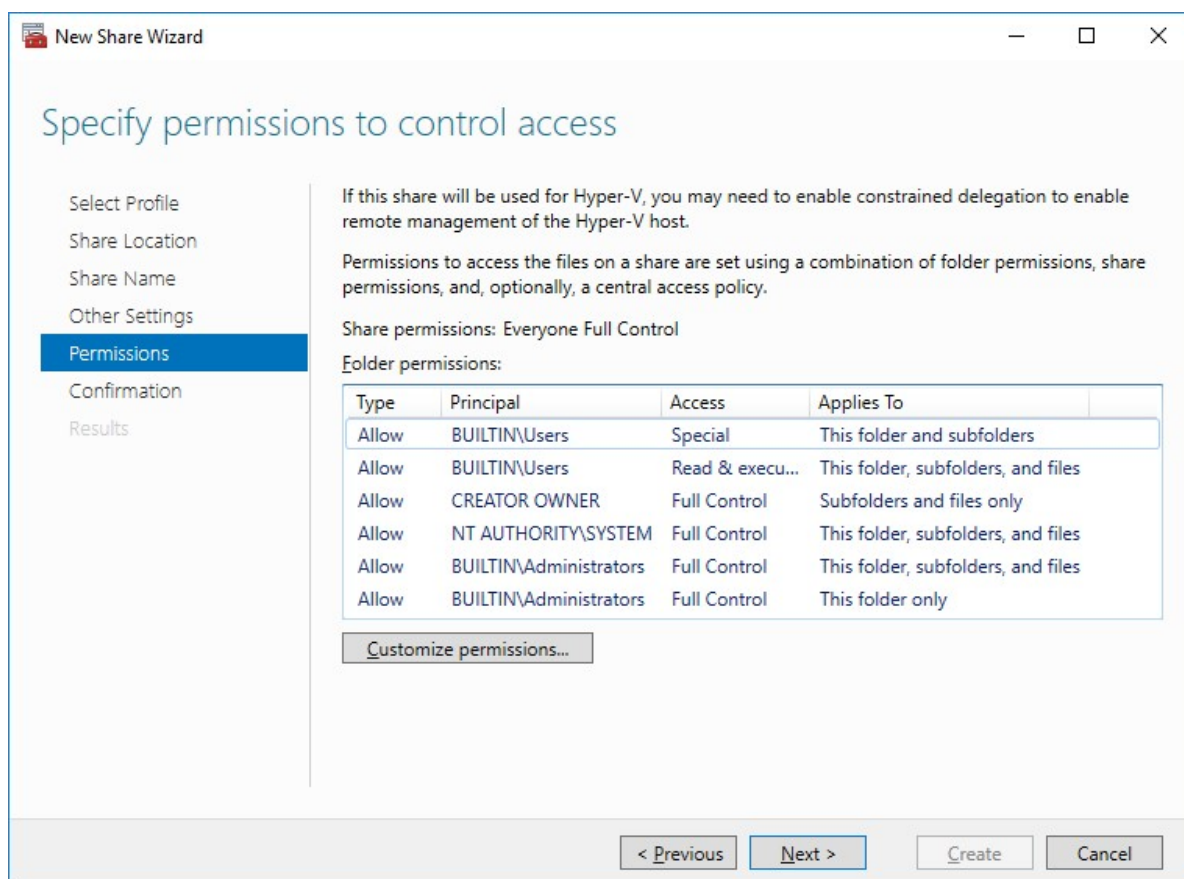


**NOTE:**

- for the Scale-Out File Server for Hyper-V, all Hyper-V computer accounts, the SYSTEM account, and all Hyper-V administrators must be provided with the full control on the share and file system
- for the Scale-Out File Server on Microsoft SQL Server, the SQL Server service account must be granted full control on the share and the file system

9. Check whether specified settings are correct. Click Previous to make any changes or click Create to proceed.

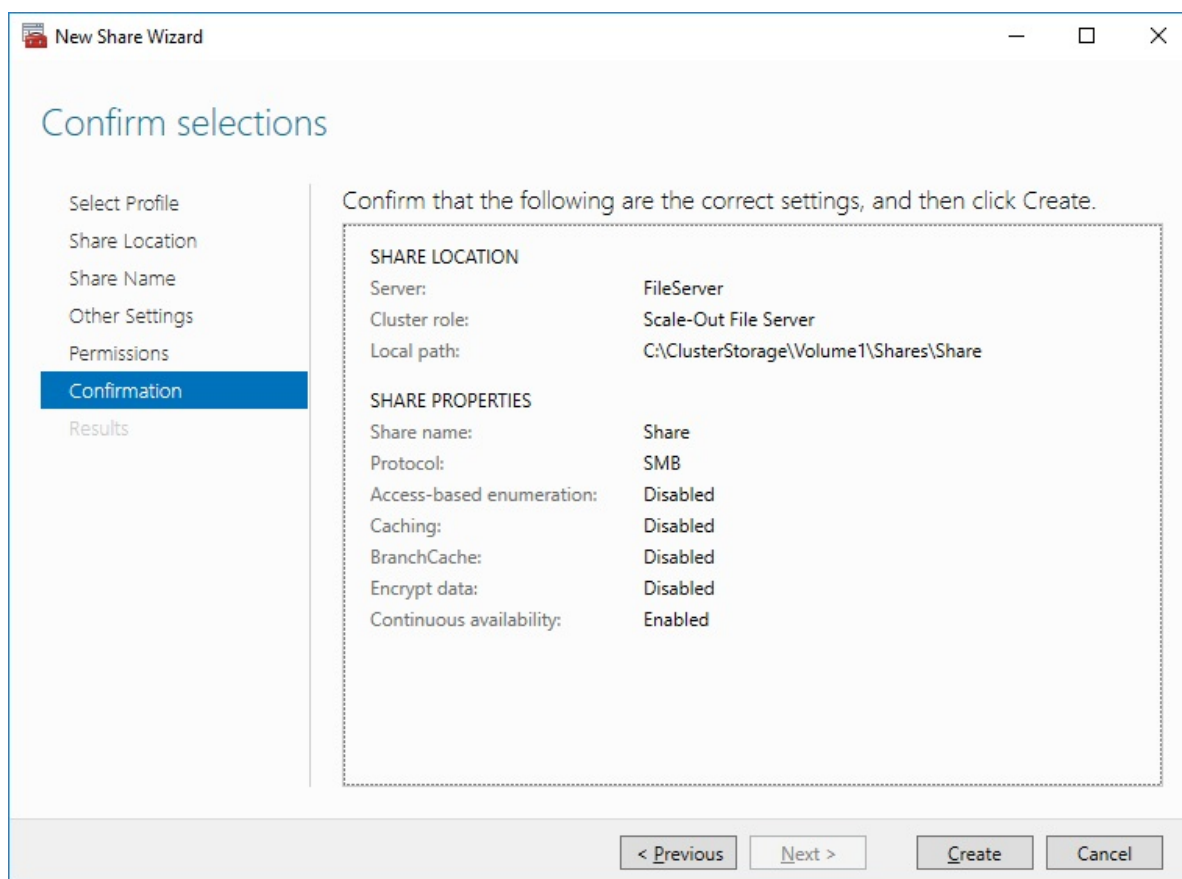


10. Check the summary and click Close to close the Wizard.

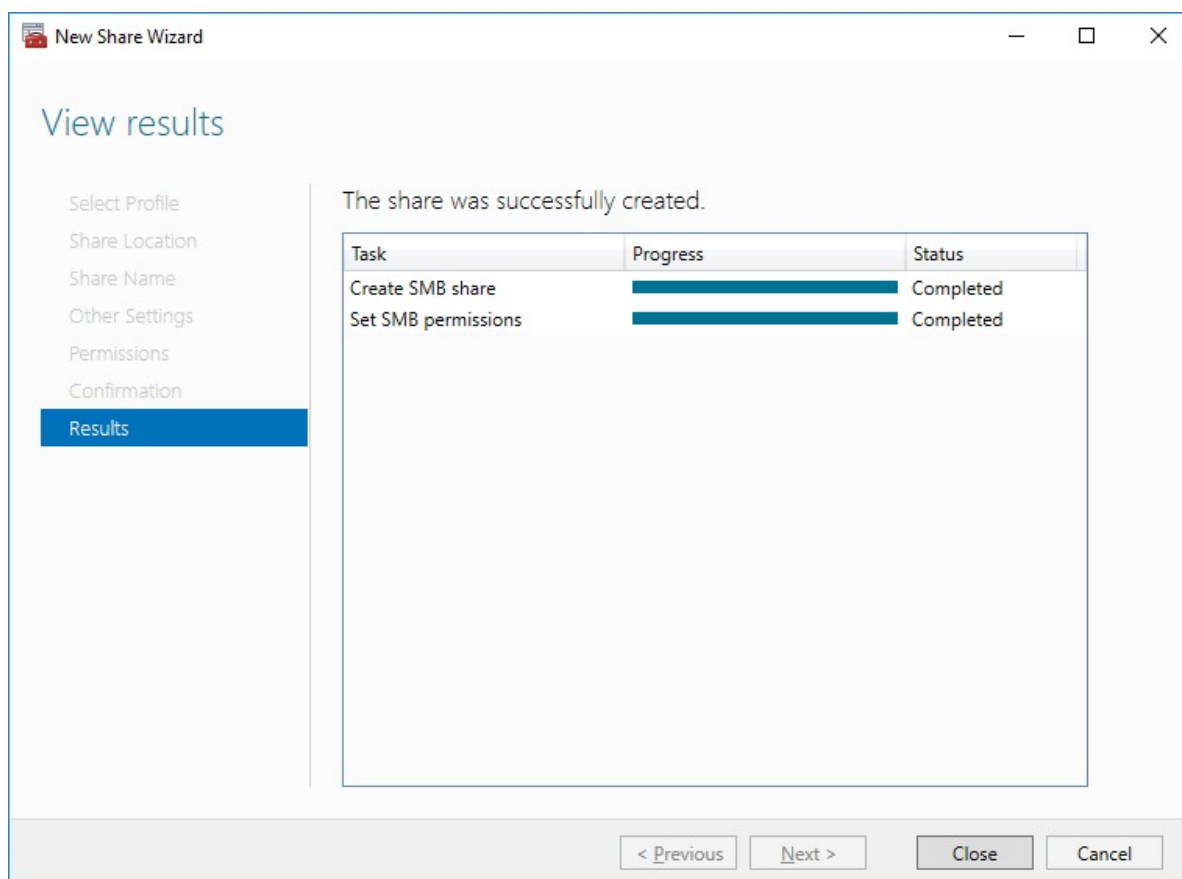

To Manage Created File Shares:


- open Failover Cluster Manager
- expand the cluster and click Roles
- choose the file share role, select the Shares tab, right-click the created file share, and select Properties:

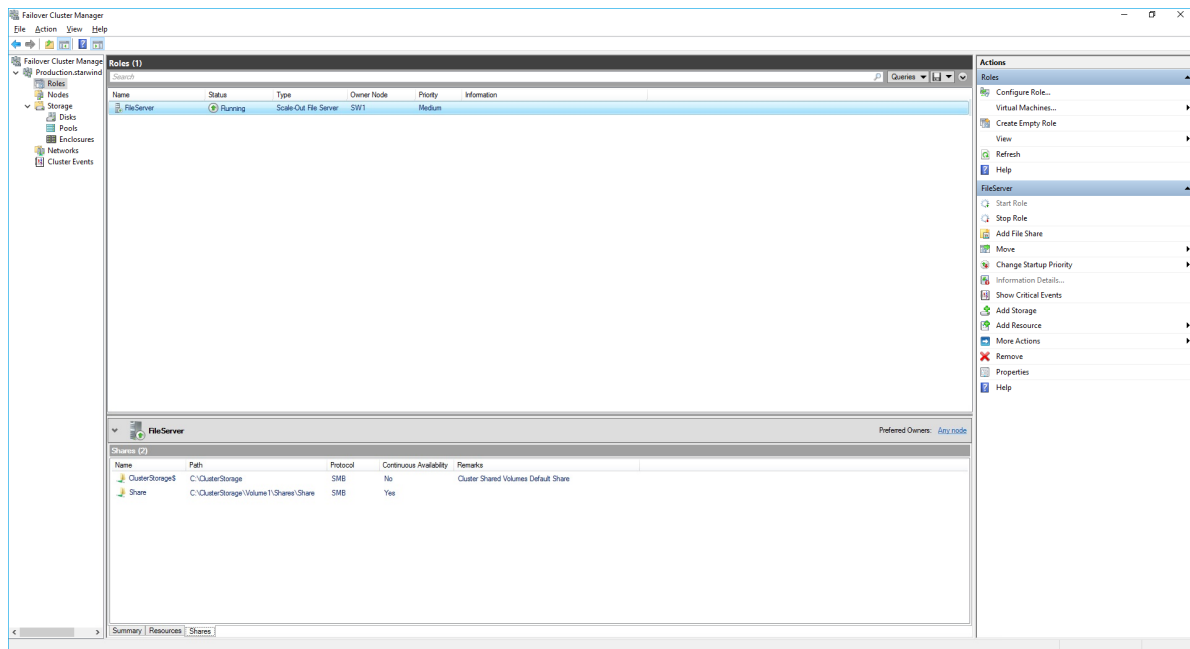


## Configuring The File Server For General Use Role

NOTE: To configure File Server for General Use, the cluster should have available storage


1. To configure the File Server for General Use role, open Failover Cluster Manager.
2. Right-click on the cluster name, then click Configure Role and click Next to continue.

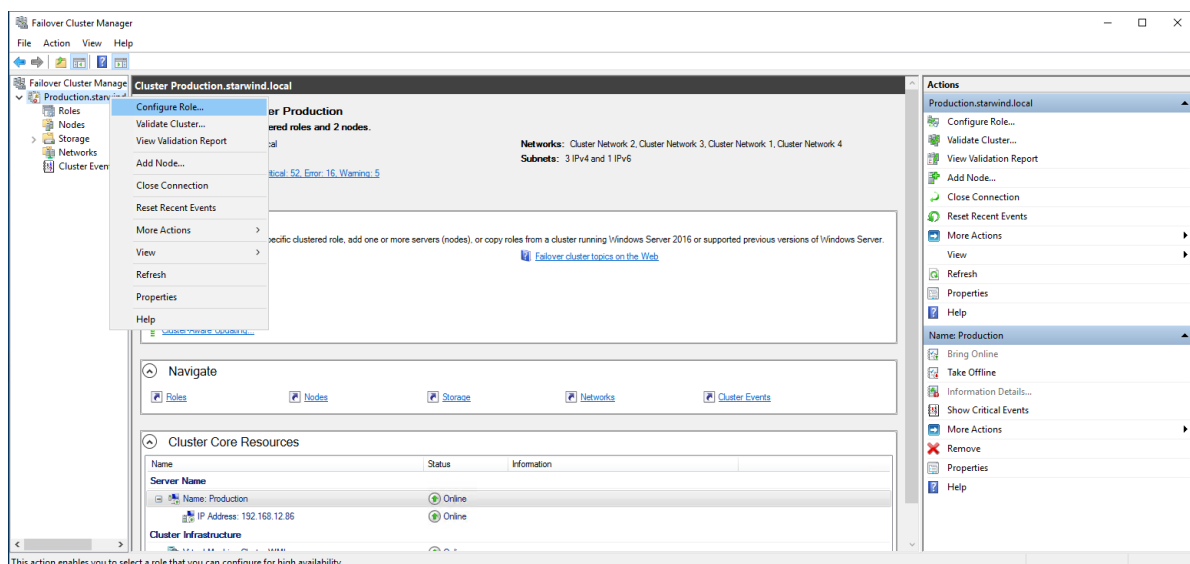


3. Select the File Server item from the list in High Availability Wizard and click Next to continue.

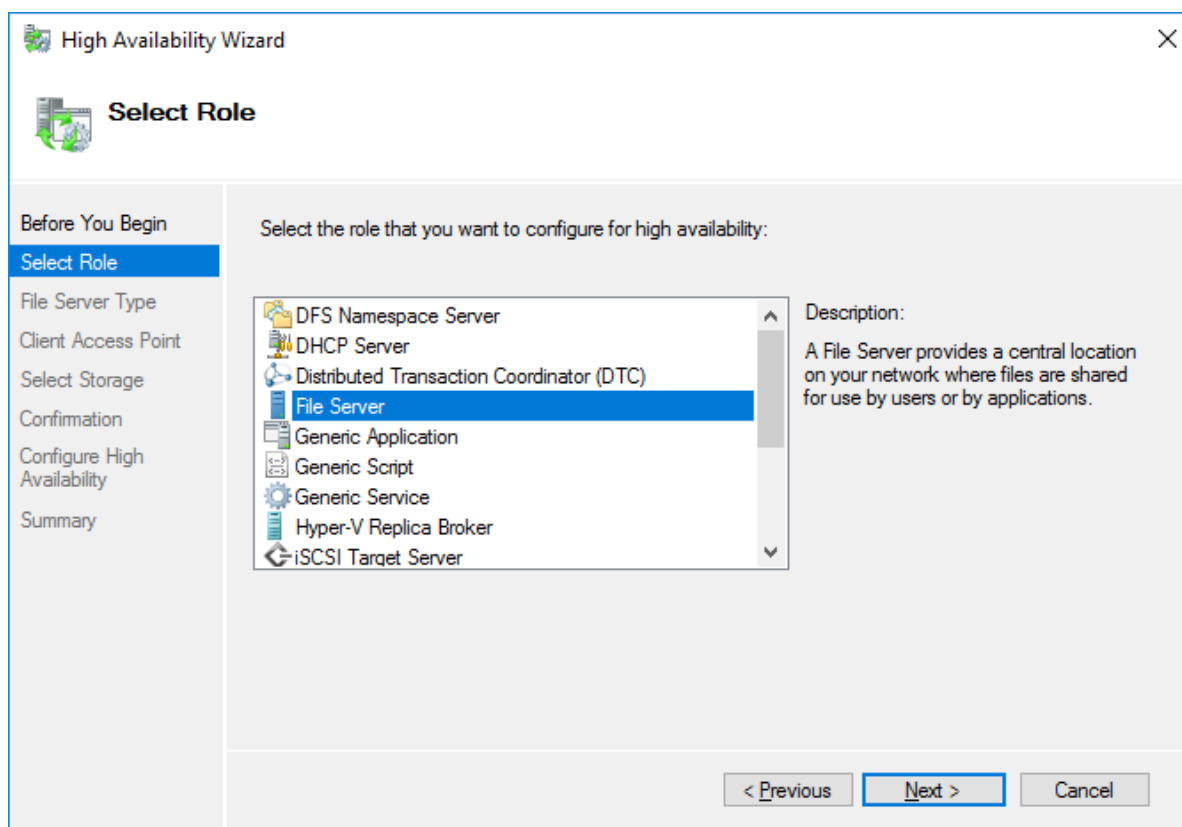

4. Select File Server for general use and click Next.

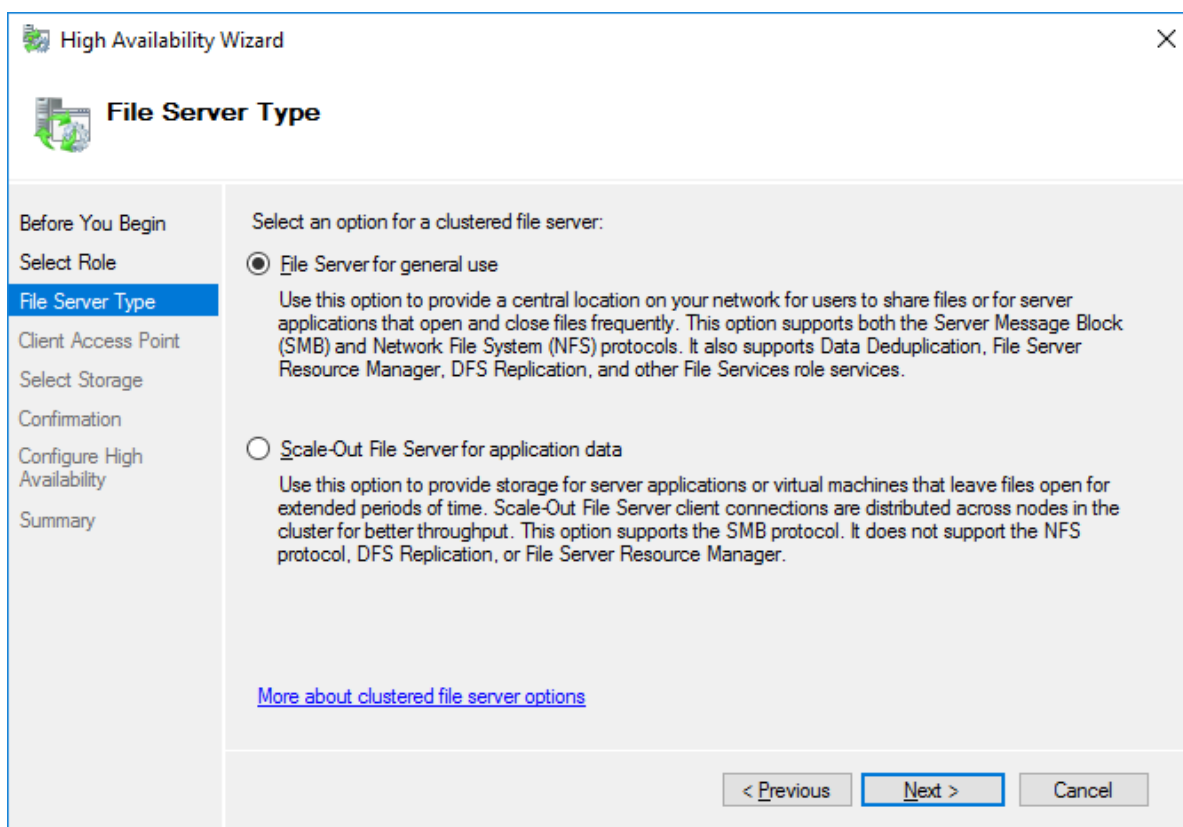

5. On the Client Access Point page, in the Name text field, type the NETBIOS name that will be used to access the File Server and IP for it.

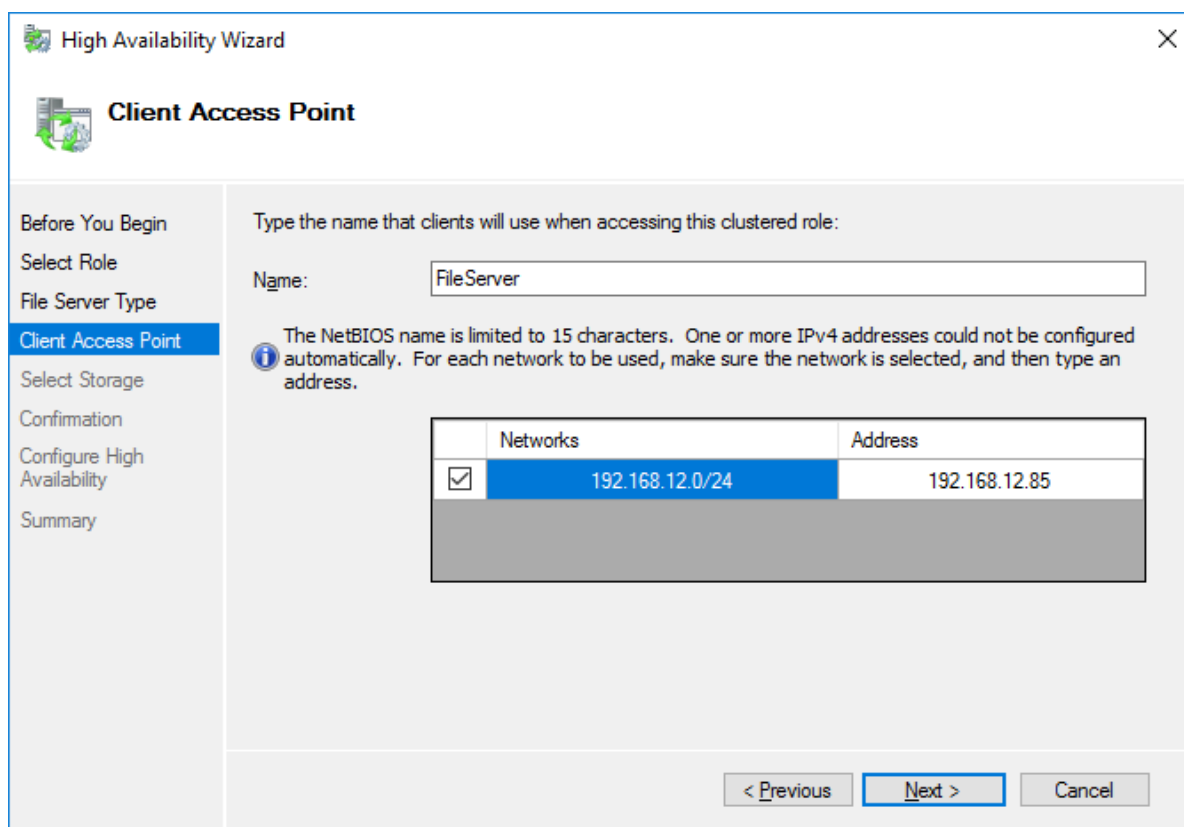

The screenshot shows the 'High Availability Wizard' window, specifically the 'Client Access Point' step. On the left is a navigation pane with steps: 'Before You Begin', 'Select Role', 'File Server Type', 'Client Access Point' (highlighted), 'Select Storage', 'Confirmation', 'Configure High Availability', and 'Summary'. The main area is titled 'Client Access Point' and contains the instruction: 'Type the name that clients will use when accessing this clustered role:'. Below this is a text box labeled 'Name:' containing 'FileServer'. An information icon (i) is followed by a note: 'The NetBIOS name is limited to 15 characters. One or more IPv4 addresses could not be configured automatically. For each network to be used, make sure the network is selected, and then type an address.' Below the note is a table with two columns: 'Networks' and 'Address'. The first row has a checked checkbox in the 'Networks' column, the text '192.168.12.0/24', and the address '192.168.12.85'. At the bottom right are three buttons: '< Previous', 'Next >' (highlighted), and 'Cancel'.

High Availability Wizard

**Client Access Point**

Before You Begin  
Select Role  
File Server Type  
**Client Access Point**  
Select Storage  
Confirmation  
Configure High Availability  
Summary

Type the name that clients will use when accessing this clustered role:

Name:

*i* The NetBIOS name is limited to 15 characters. One or more IPv4 addresses could not be configured automatically. For each network to be used, make sure the network is selected, and then type an address.


	Networks	Address
<input checked="" type="checkbox"/>	192.168.12.0/24	192.168.12.85

< Previous   **Next >**   Cancel


Click Next to continue.

6. Select the Cluster disk and click Next.



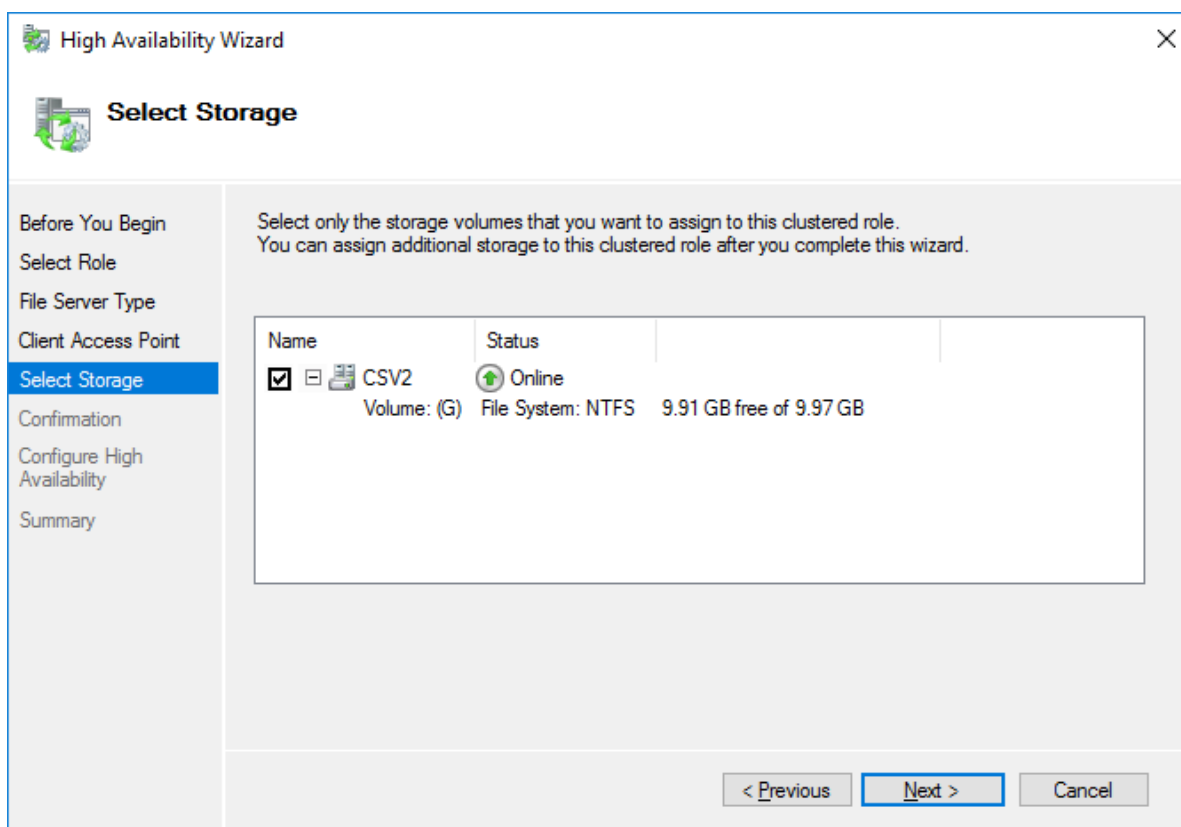


7. Check whether the specified information is correct. Click Next to proceed or Previous to change the settings.

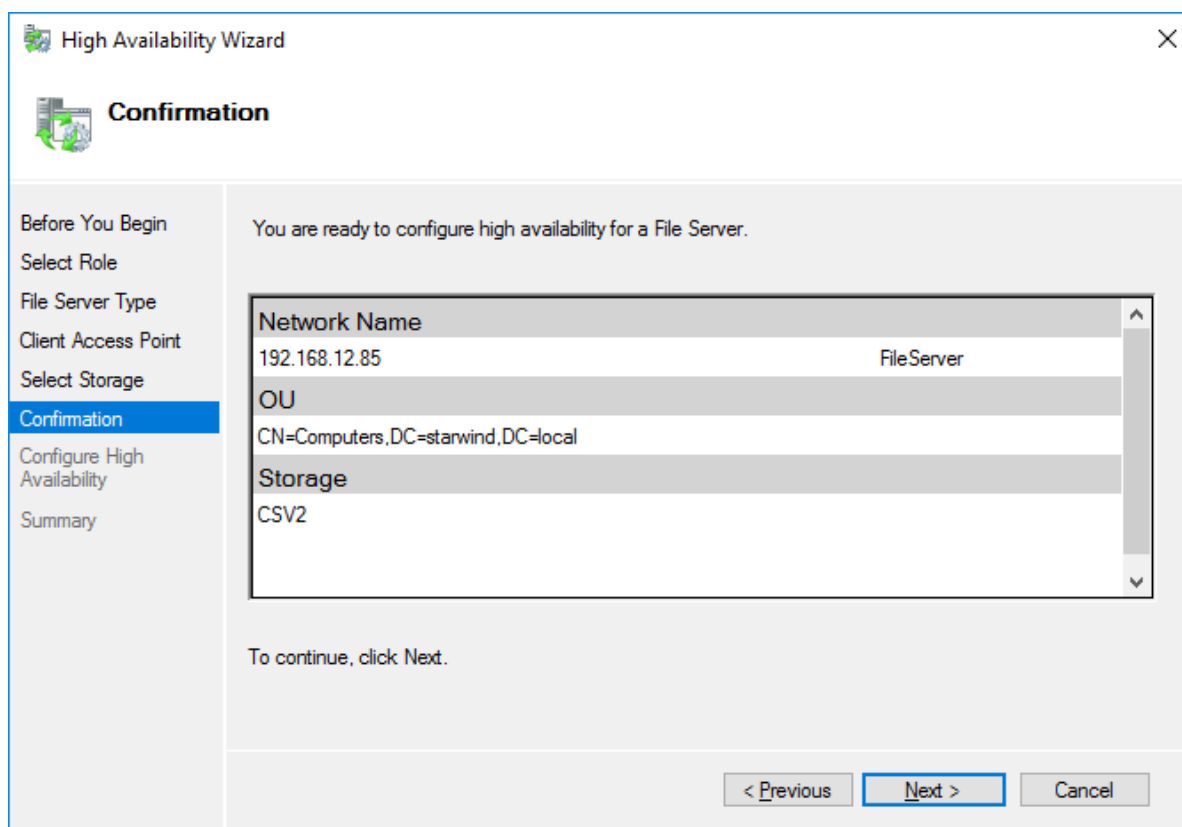


8. Once the installation has been finished successfully, the Wizard should now look like the screenshot below.

Click Finish to close the Wizard.

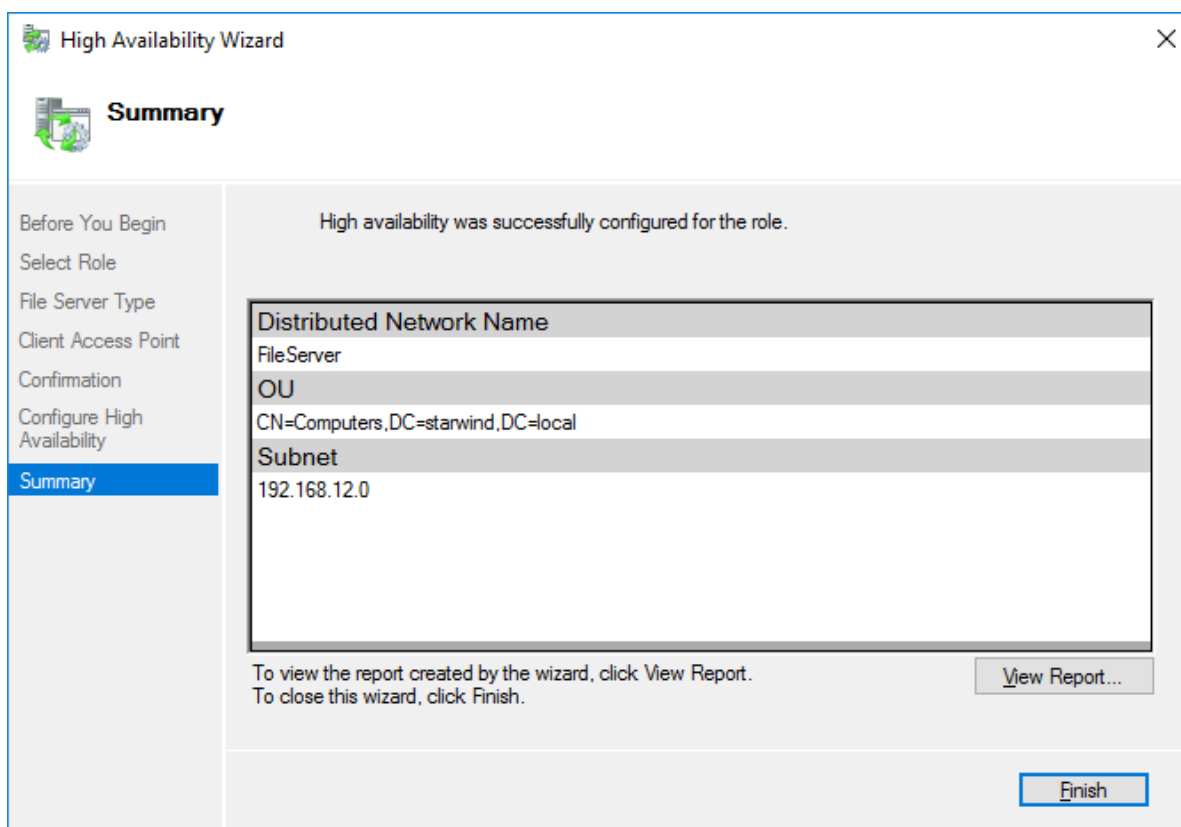


9. The newly created role should now look like the screenshot below.

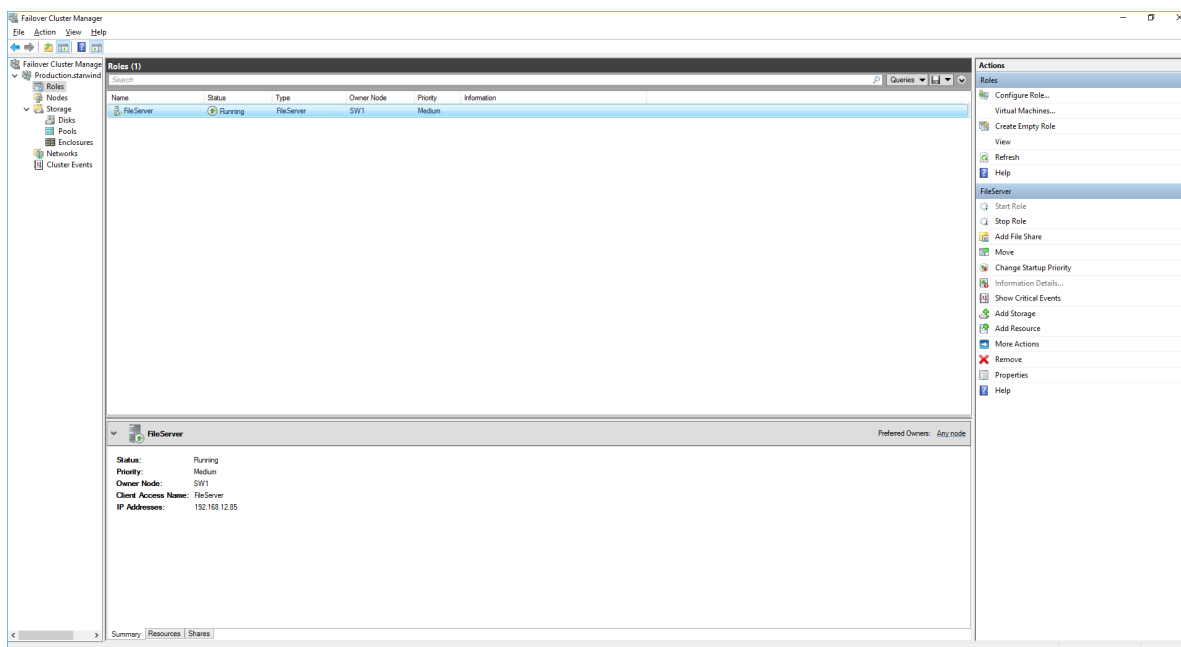


NOTE: If the role status is Failed and it is unable to Start, please, follow the next steps:

- open Active Directory Users and Computers

- enable the Advanced view if it is not enabled
- edit the properties of the OU containing the cluster computer object (in this case – Production)
- open the Security tab and click Advanced
- in the appeared window, press Add (the Permission Entry dialog box opens), click Select a principal
- in the appeared window, click Object Types, select Computers, and click OK
- enter the name of the cluster computer object (in this case – Production)

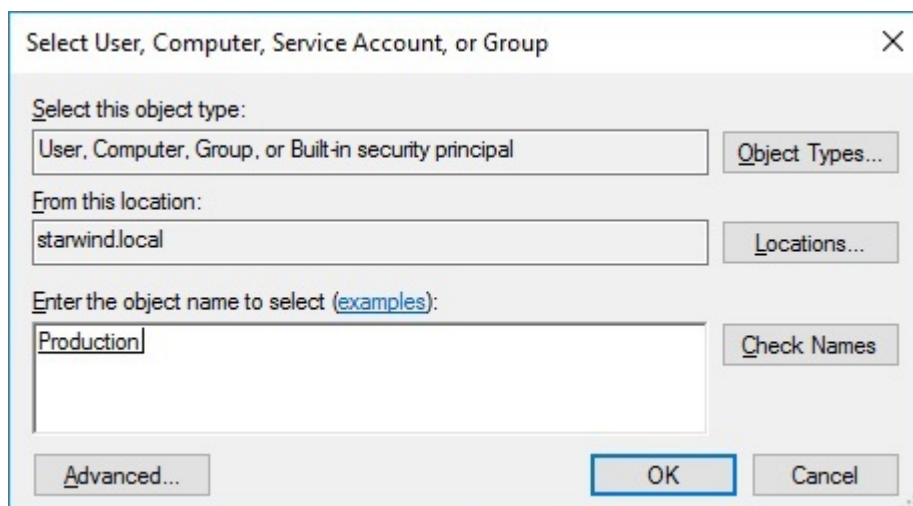

- go back to Permission Entry dialog, scroll down, and select Create Computer Objects

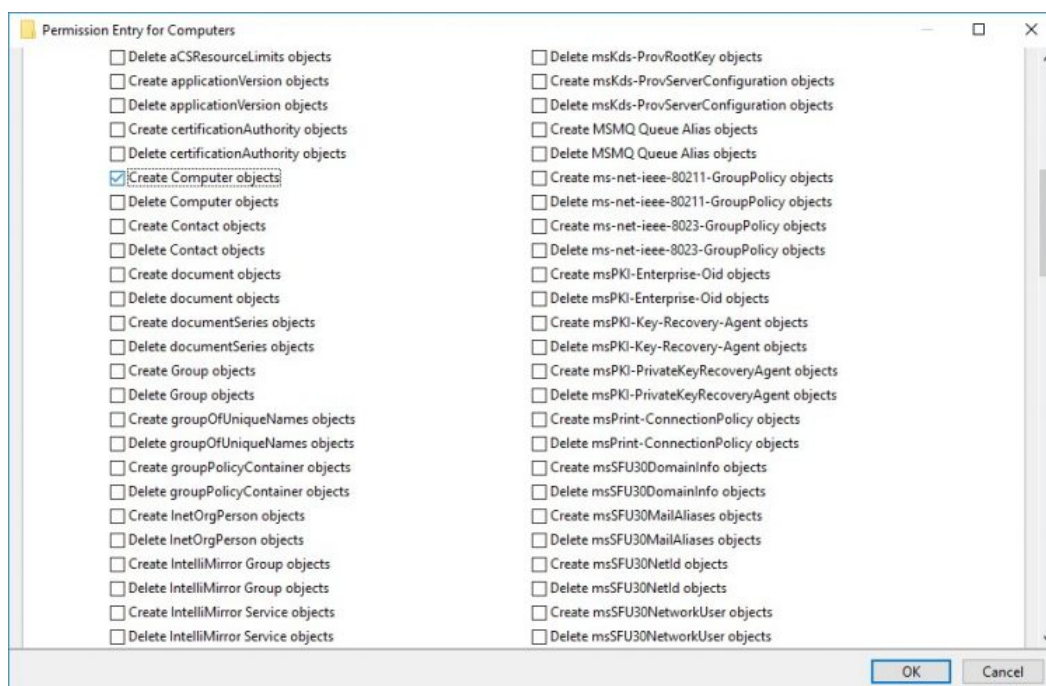


- click OK on all opened windows to confirm the changes

- open Failover Cluster Manager, right-click File Share role and click Start Role

## Configuring Smb File Share

To Add SMB File Share


1. Open Failover Cluster Manager.
2. Expand the cluster and then click Roles.
3. Right-click the File Server role and then press Add File Share.
4. On the Select the profile for this share page, click SMB Share – Quick and then click Next.

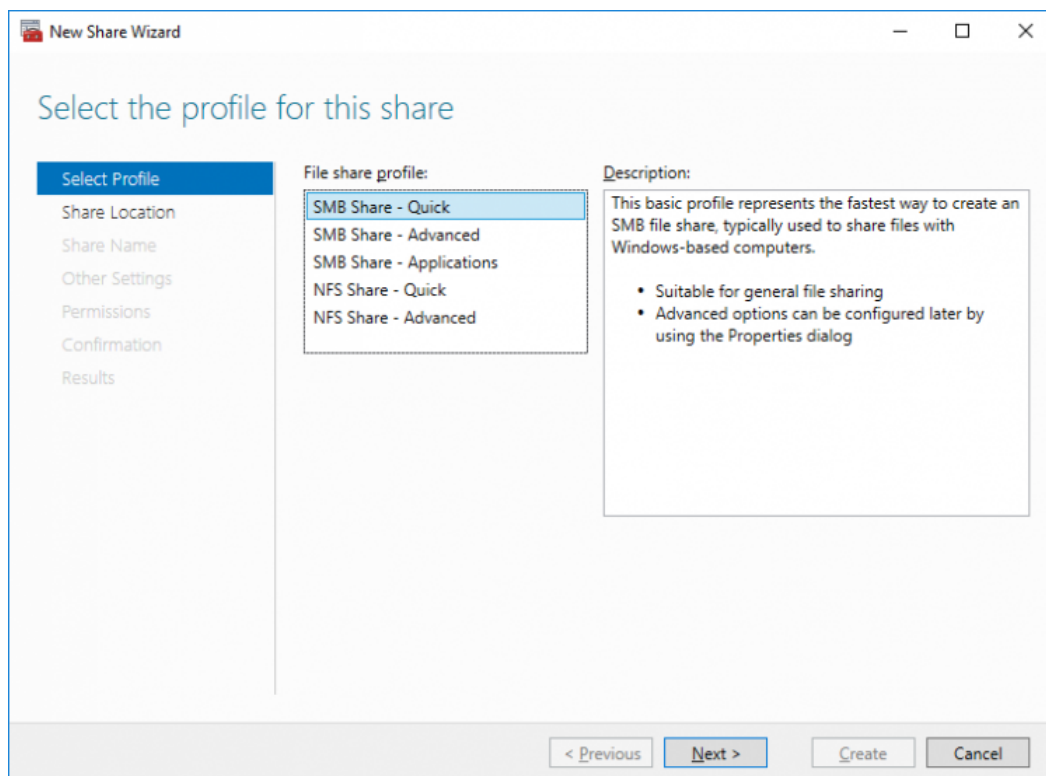


5. Select available storage to host the share. Click Next to continue.




continue.

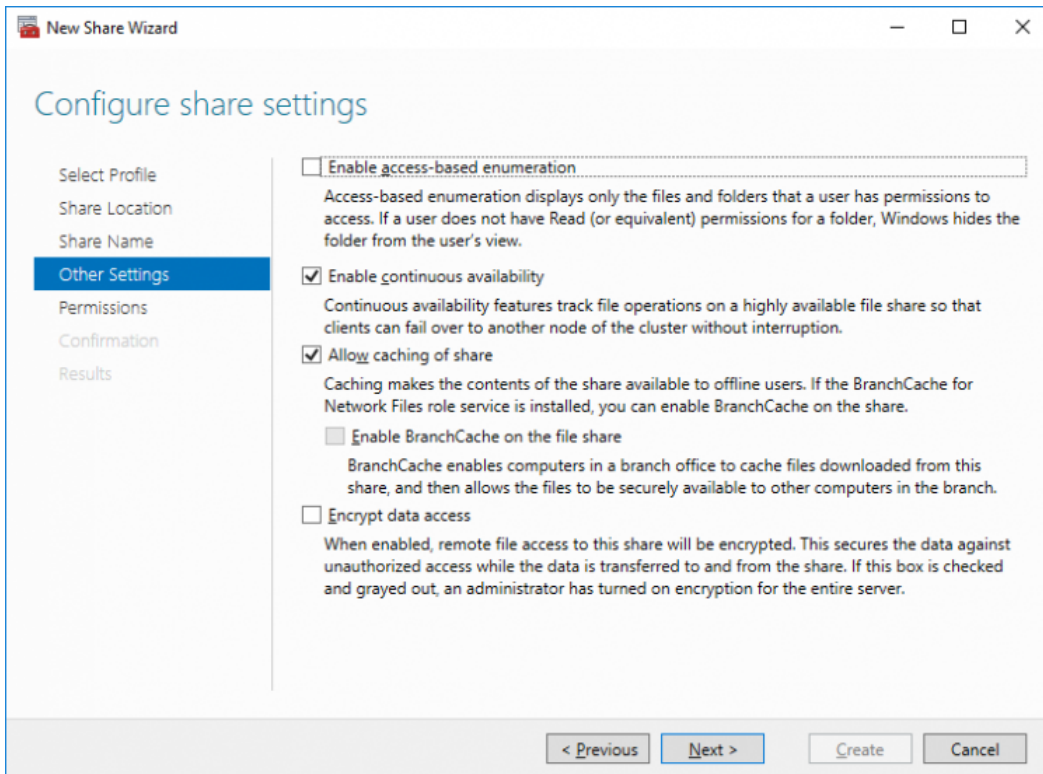

8.Specify the access permissions for the file share.

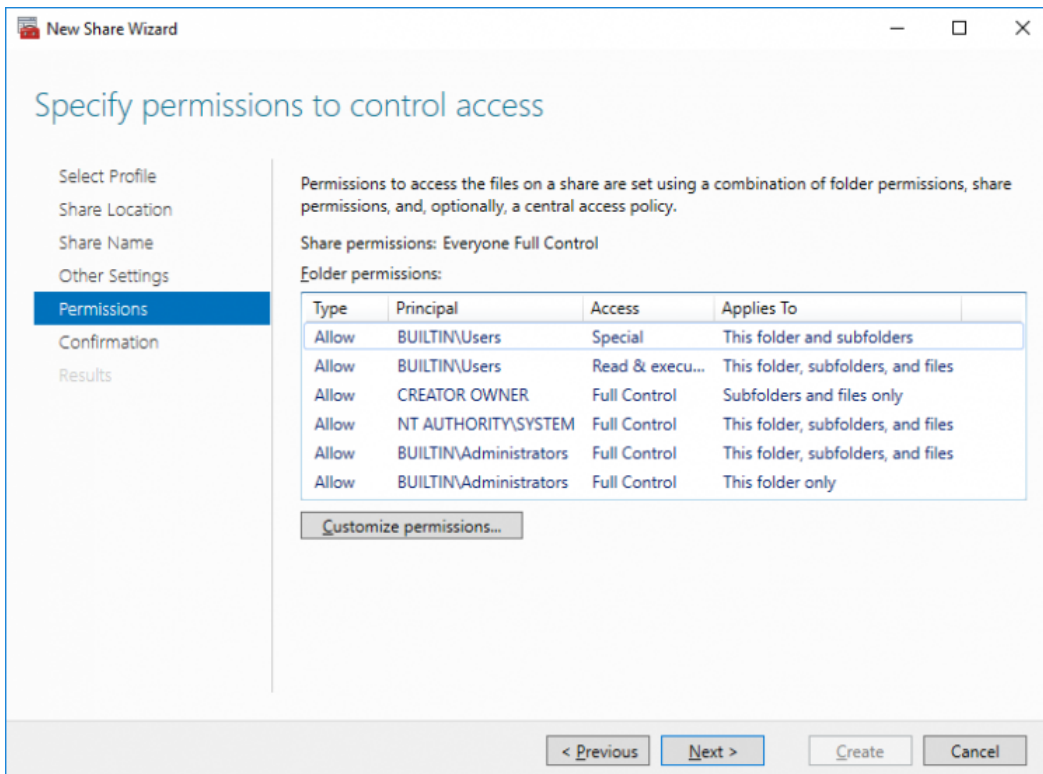


9. Check whether specified settings are correct. Click Previous to make any changes or Next/Create to continue.

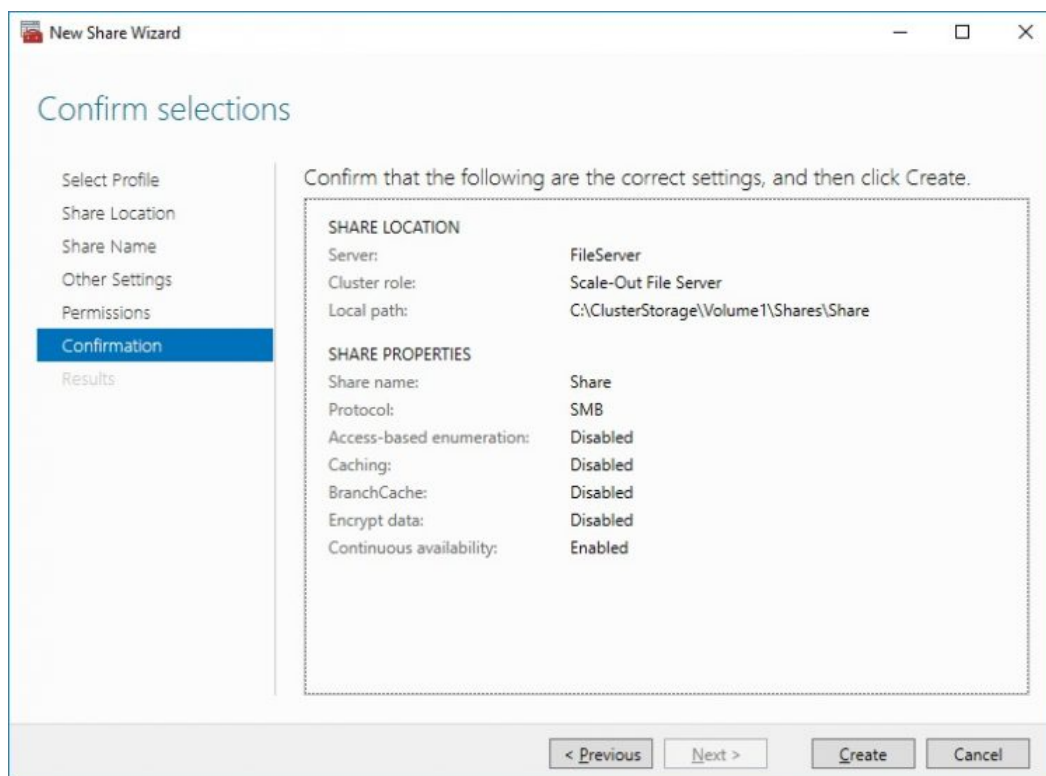

10. Check the summary and click Close.



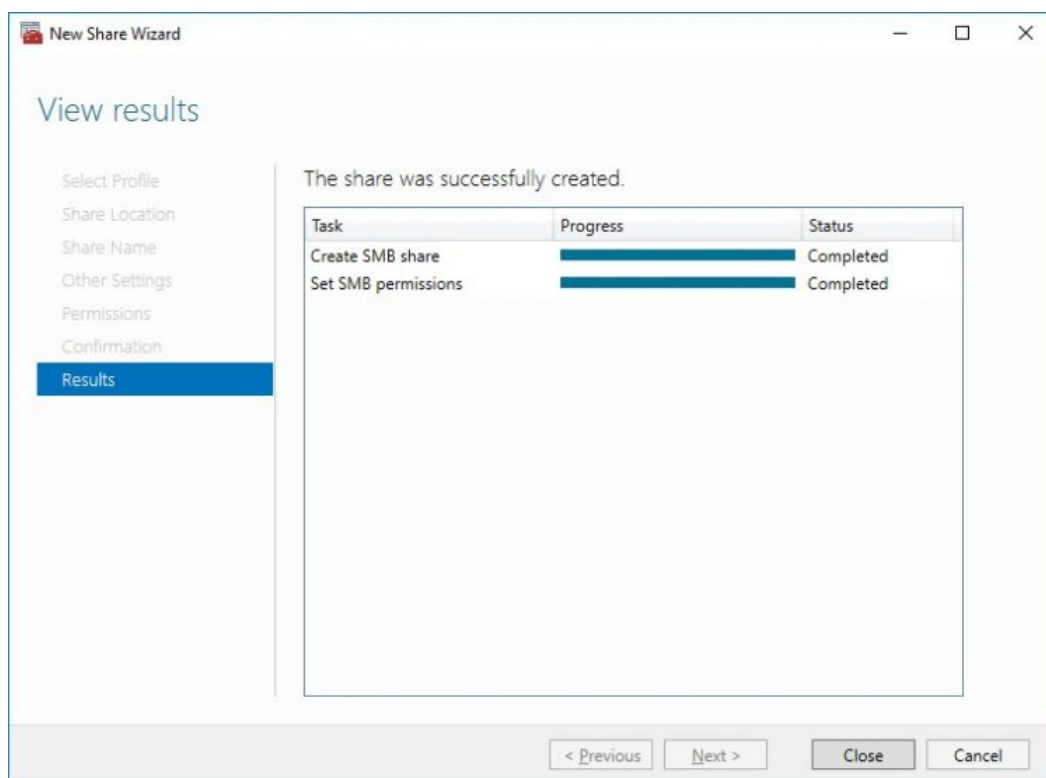


To manage created SMB File Shares

11. Open Failover Cluster Manager.

12. Expand the cluster and click Roles.


13. Choose the File Share role, select the Shares tab, right-click the created file share, and select Properties.

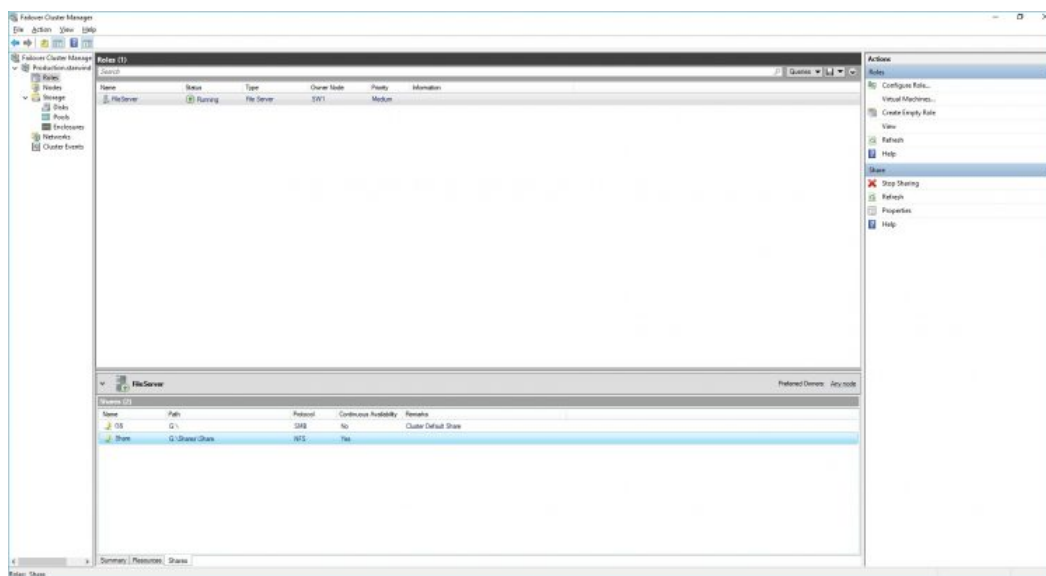


## Configuring Nfs File Share

To Add NFS File Share

1. Open Failover Cluster Manager.
2. Expand the cluster and then click Roles.
3. Right-click the File Server role and then press Add File Share.
4. On the Select the profile for this share page, click NFS Share – Quick and then click Next.

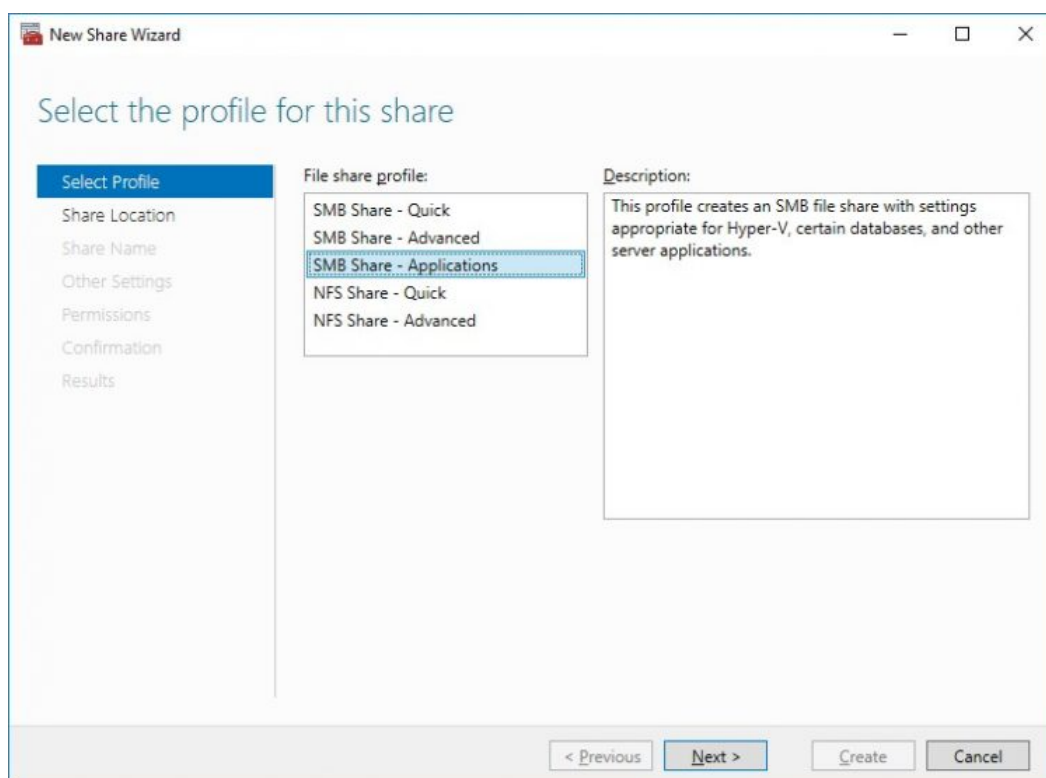

5. Select available storage to host the share. Click Next to continue.

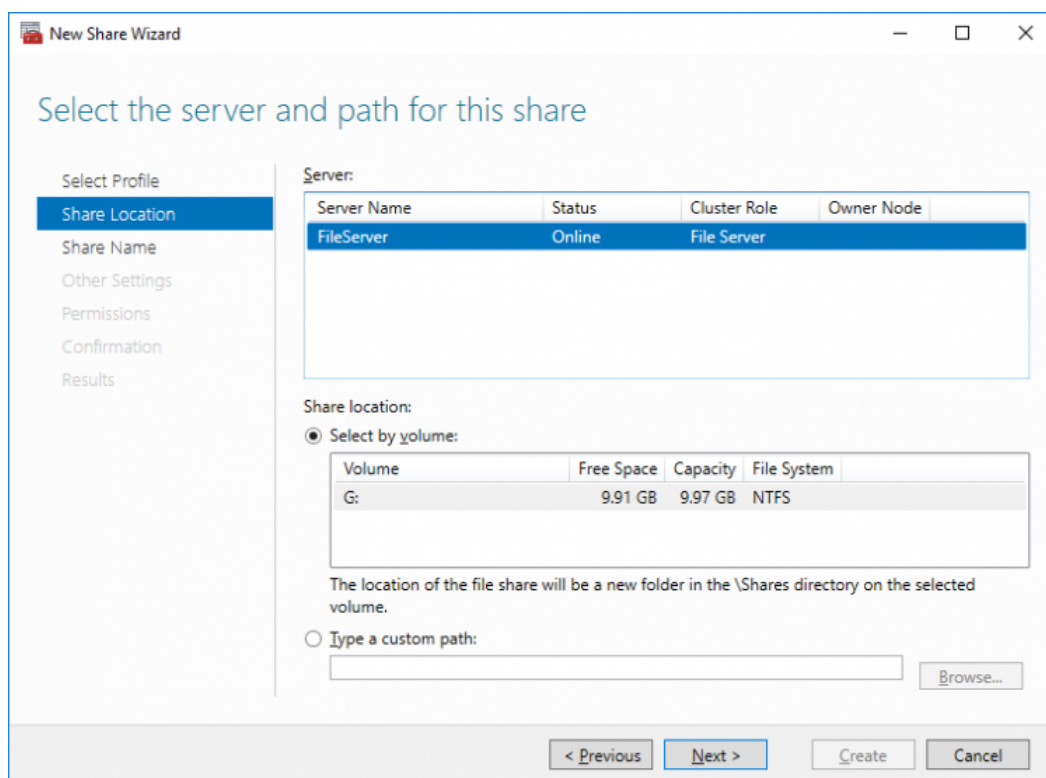

**New Share Wizard**

Select the server and path for this share

**Select Profile**

- Share Location
- Share Name
- Other Settings
- Permissions
- Confirmation
- Results

**Server:**

Server Name	Status	Cluster Role	Owner Node
FileServer	Online	File Server	

**Share location:**


☒ Select by volume:

Volume	Free Space	Capacity	File System
G:	9.91 GB	9.97 GB	NTFS

The location of the file share will be a new folder in the \Shares directory on the selected volume.

☐ Type a custom path:

6. Type in the file share name and click Next.

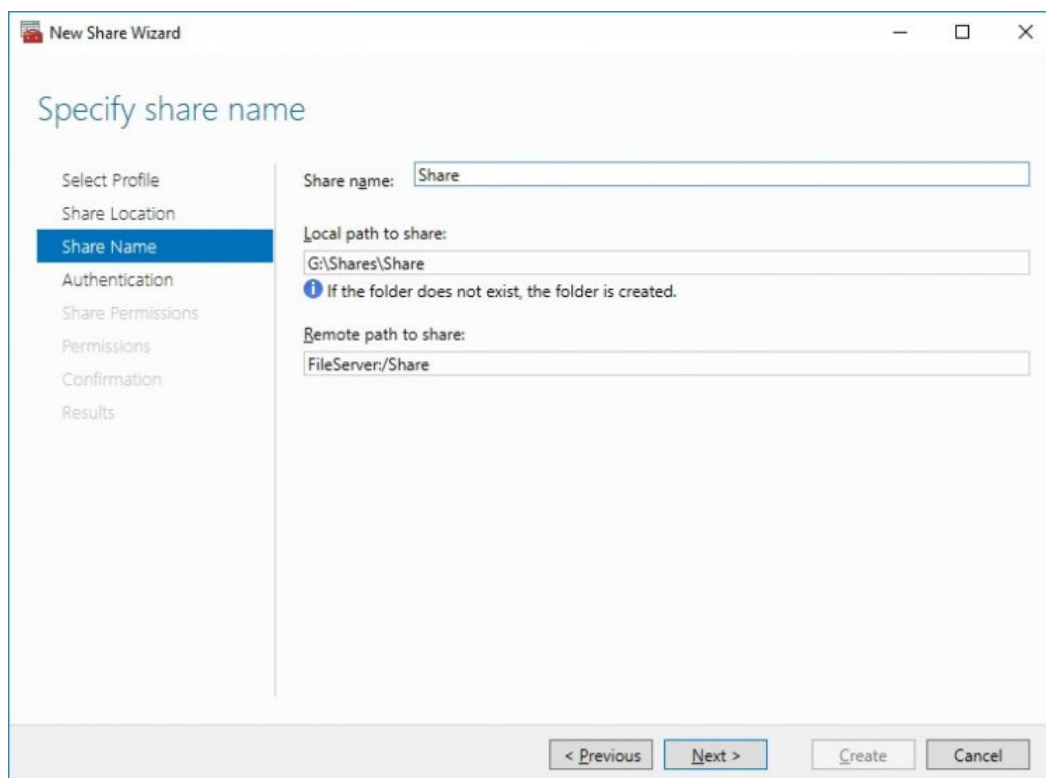

**New Share Wizard**

Specify share name

**Select Profile**

- Share Location
- Share Name
- Authentication
- Share Permissions
- Permissions
- Confirmation
- Results

**Share name:**

**Local path to share:**


**Remote path to share:**

**Local path to share:**


**Remote path to share:**

7. Specify the Authentication. Click Next and confirm the message in pop-up window to




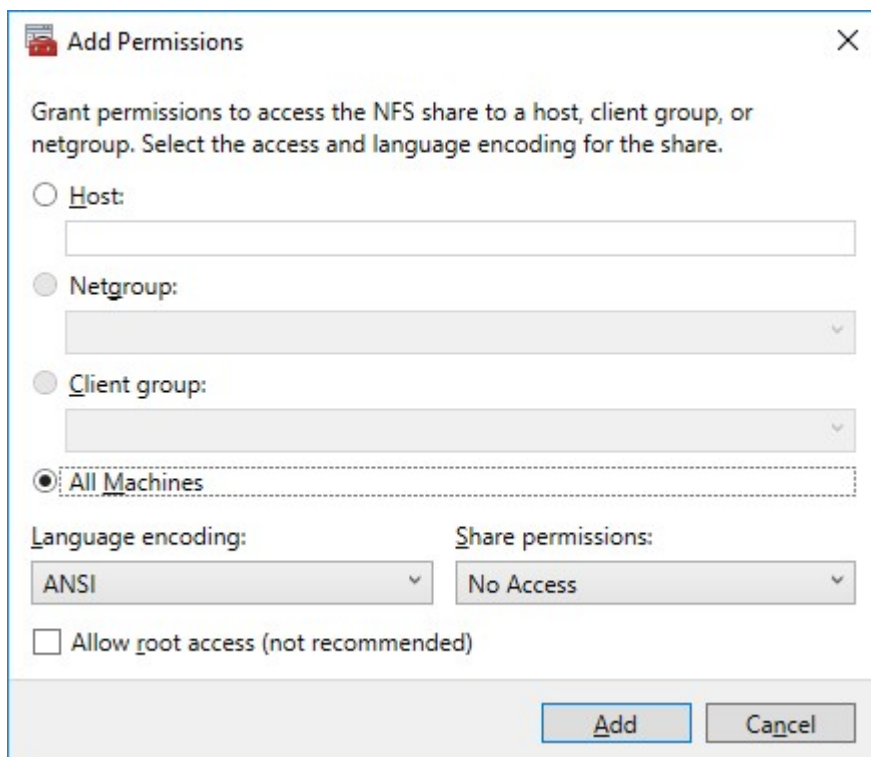


9. Specify the access permissions for the file share.

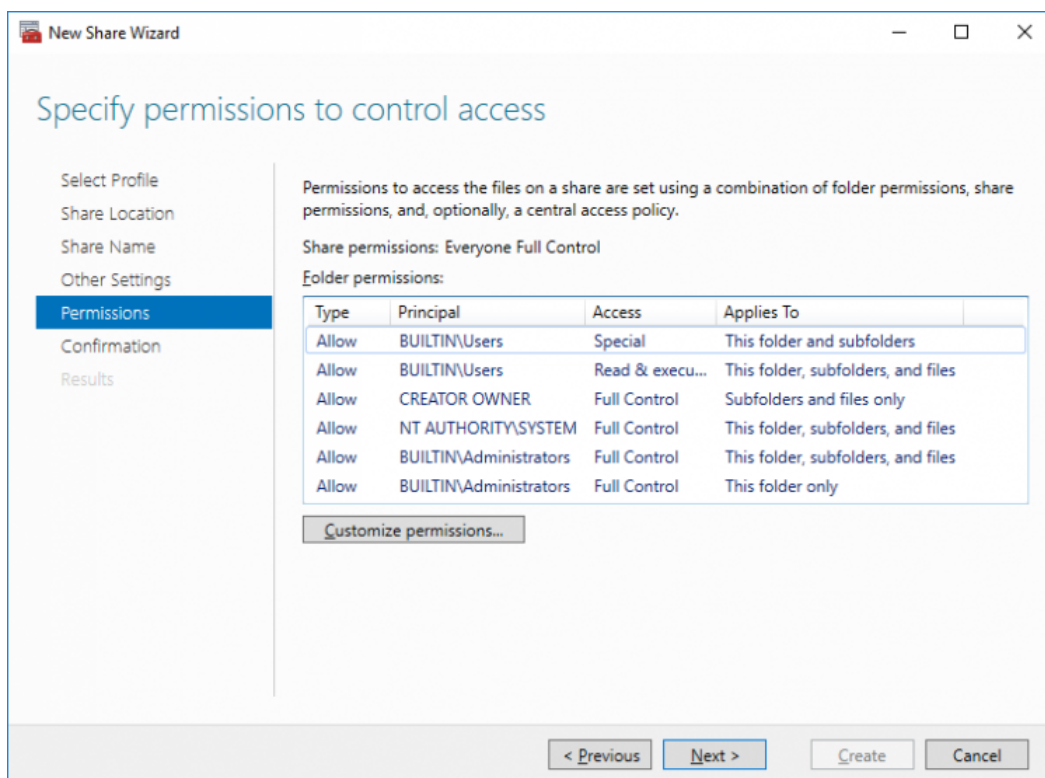

10. Check whether specified settings are correct. Click Previous to make any changes or click Create to continue.

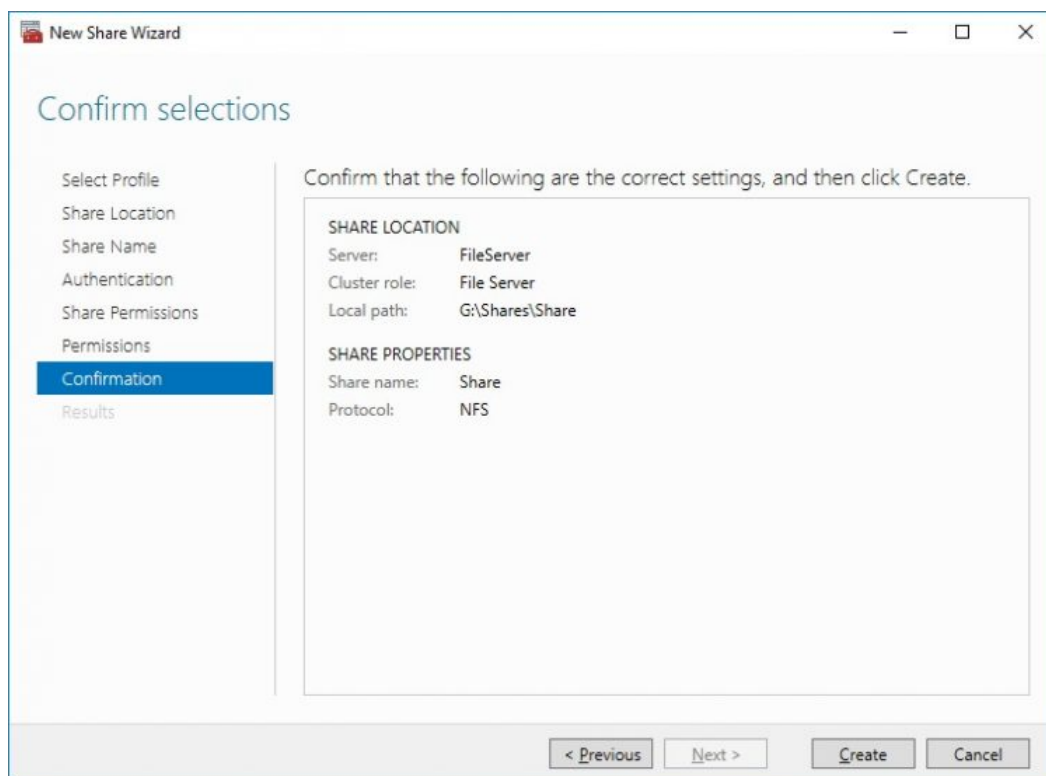


11. Check a summary and click Close to close the Wizard.

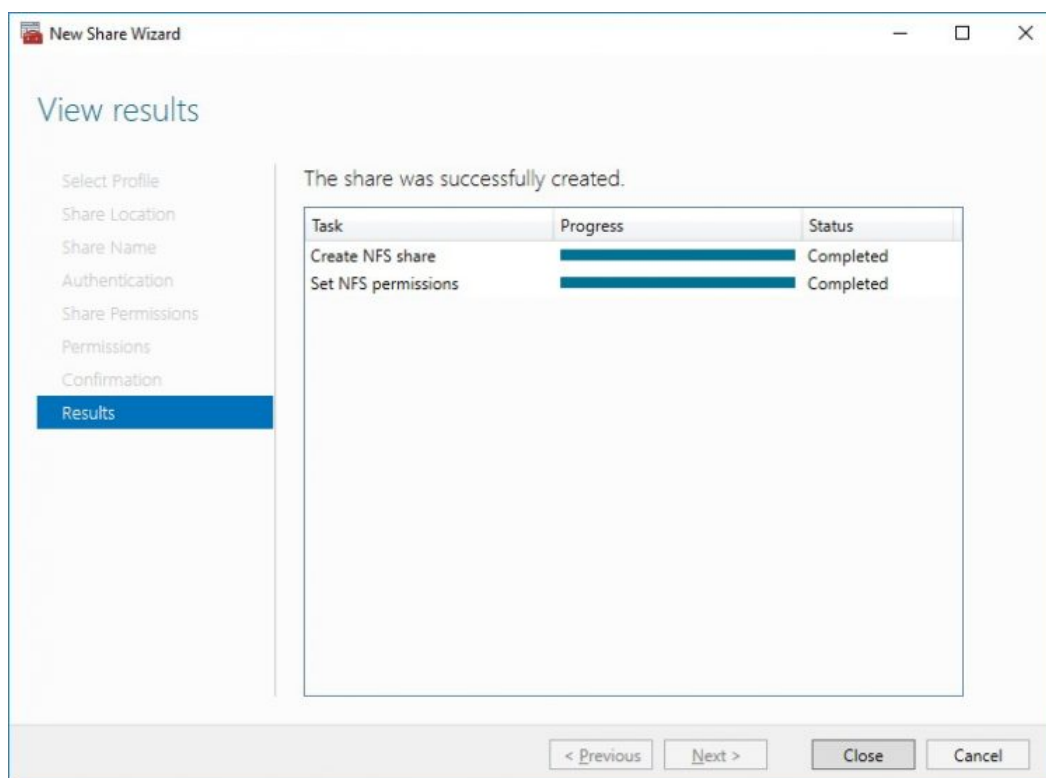

To manage created NFS File Shares:

- open Failover Cluster Manager
- expand the cluster and click Roles
- choose the File Share role, select the Shares tab, right-click the created file share, and select Properties

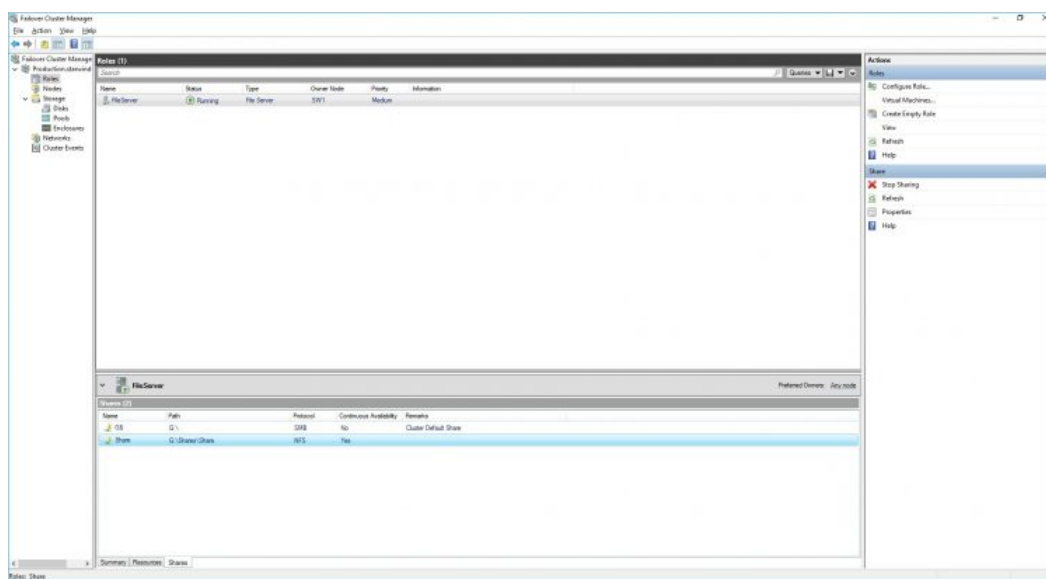








## Conclusion

Following this guide, a 2-node Failover Cluster was deployed and configured with StarWind Virtual SAN (VSAN) running in a CVM on each host. As a result, a virtual shared storage “pool” accessible by all cluster nodes was created for storing highly available virtual machines.



## Contacts

US Headquarters	EMEA and APAC
 +1 617 829 44 95	 +44 2037 691 857 (United Kingdom)
 +1 617 507 58 45	 +49 800 100 68 26 (Germany)
 +1 866 790 26 46	 +34 629 03 07 17 (Spain and Portugal)
	 +33 788 60 30 06 (France)

Customer Support Portal: <https://www.starwind.com/support>

Support Forum: <https://www.starwind.com/forums>

Sales: [sales@starwind.com](mailto:sales@starwind.com)

General Information: [info@starwind.com](mailto:info@starwind.com)



StarWind Software, Inc. 100 Cummings Center Suite 224-C Beverly MA 01915, USA  
[www.starwind.com](http://www.starwind.com) ©2024, StarWind Software Inc. All rights reserved.